


- 32 Reinstall all removed parts.
- 33 Connect battery.
- 34 Perform function test.

Wiring diagram, vehicles starting approx. 9.85 to approx. 3.86

--- Main harness, standard equipment  
 ——— Auxiliary harness, subsequently installed

- F 1 Fuse and relay box
- H 1 Dual-tone signalling system
- H 2 Fanfares
- S 7 Signal contact
- S 7/1 Changeover switch, signalling system/fanfares
- W 2 Ground, front right (near lamp unit)
- W 9 Ground, front left (near lamp unit)
- X 24 Plug connection, headlamp harness
- X 63 Plug connection, steering harness
- X 87/1 Plug connection, signalling system 1-pole

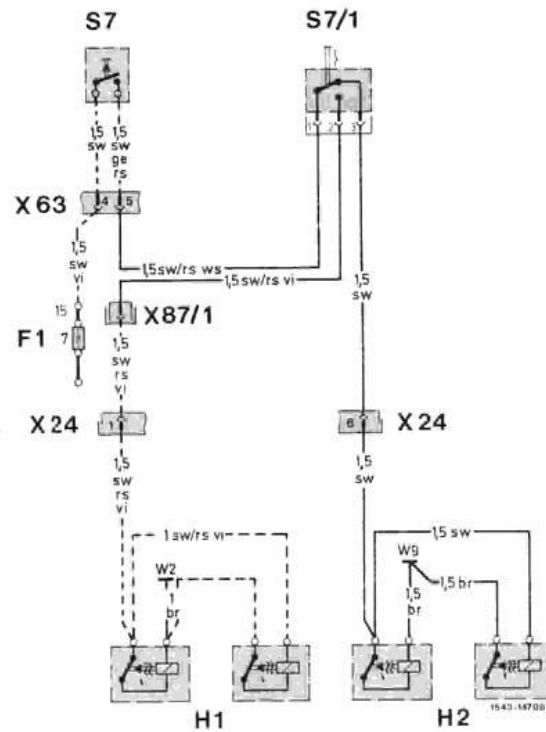

Wiring diagram, vehicles starting approx. 4.86

--- Main harness, standard equipment  
 ——— Auxiliary harness, subsequently installed

- F 1 Fuse and relay box
- H 1 Dual-tone signalling system
- H 2 Fanfares
- S 7 Signal contact
- S 7/2 Changeover switch, signalling system/fanfares
- W 2 Ground, front right (near lamp unit)
- W 9 Ground, front left (near lamp unit)
- X 6 Cable connector, terminal 58d
- X 24 Plug connection, headlamp harness
- X 63 Plug connection, steering harness
- X 87/1 Plug connection, signalling system 1-pole

