


MODEL 211.0/ 2/ 6

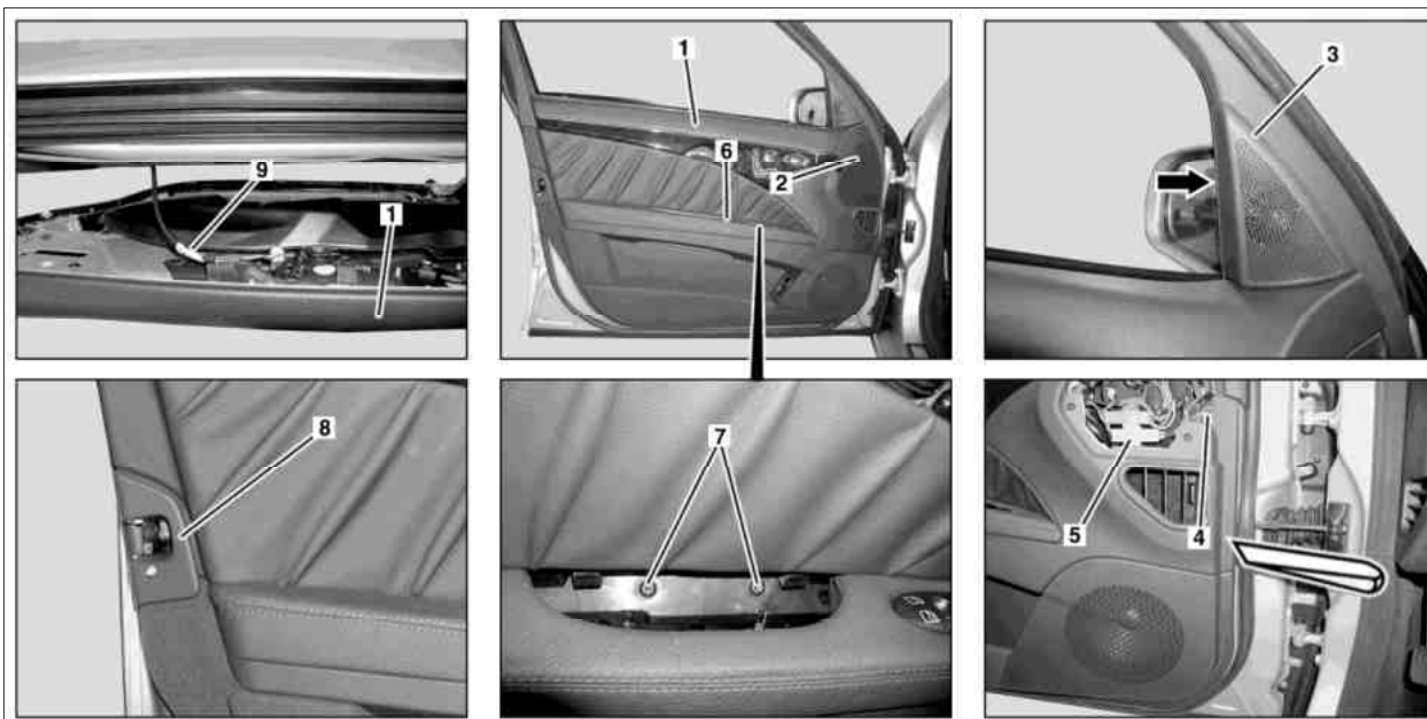


P72.10-2382-09

| | | | | | |
|---|-----------------------|---|---------------------------|---|-----------------|
| 1 | Door lining | 4 | Bolt | 7 | Bolts |
| 2 | Cover | 5 | Male multipoint connector | 8 | Door lock cover |
| 3 | Mirror triangle cover | 6 | Armrest cover | 9 | Bowden cable |

Modification notes

| | | | |
|--------|--|--|--|
| 8.1.04 | Disconnect/connect/remove ground lead from battery | | |
|--------|--|--|--|

| | Remove/Install | | |
|----|---|---|---------------|
| 1 | Lower window in front door | See operator's manual. | |
| 2 | Unclip mirror triangle cover (3) (arrow) and disconnect electrical connector from tweeter | | |
| 3 | Remove cover (2) from door lining and remove | | |
| 4 | Unscrew screw (4) and unclip male multipoint connector (5) | | |
| 5 | Unclip armrest cover (6) and unscrew bolts (7) below | | |
| 6 | Remove covering of door lock (8) | | |
| 7 | Pry off door lining (1) from inner door panel with mounting wedge at mounting clips | Move mounting wedge (1) directly onto each mounting clip and ensure that the retainer tabs of the mounting clips do not tear out of the door lining (1) Installation: Replace damaged mounting clips. | *110589035900 |
| 8 | Lift door lining (1) upward and simultaneously pull away from inner door panel until Bowden cable (9) is accessible | | |
| 9 | Remove Bowden cable (9) at inner door opener | | |
| 10 | Disconnect electrical connectors between door lining (1) and front door control module | | |
| 11 | Remove door lining (1) | | |
| 12 | Install in the reverse order | | |



110 589 03 59 00

Mounting wedge