


# Emergency Operation Circuit

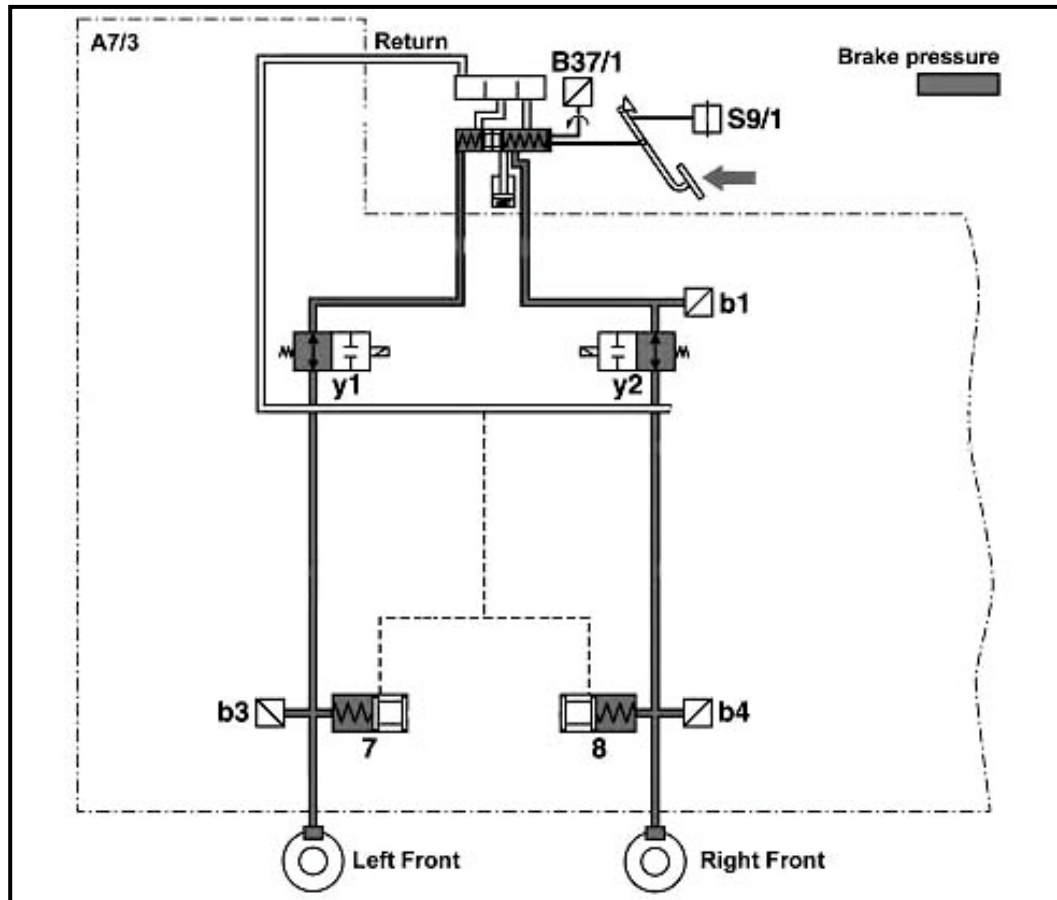

A7/3b1, b3, and b4 are pressure sensors that provide information to the SBC control module.

The left front dividing piston (7) and right front dividing piston (8) are used to isolate the emergency circuit from the electronically controlled circuit.

The pistons are double sealed with the dotted line representing that the brake fluid would return to the reservoir in the event of a seal failure.

During the emergency operation, the pistons have reached their maximum travel so that the caliper pistons will apply the pressure to the rotors.