



Factory Approved Service Products August 2007



Mercedes-Benz

Mercedes-Benz USA recommends the use of Genuine Mercedes-Benz parts, accessories and factory-approved service products explicitly approved by us for your vehicle model.

We have subjected these parts, accessories and service products to special tests in which their reliability, safety and their special suitability for Mercedes-Benz vehicles have been verified.

Genuine Mercedes-Benz parts, accessories and factory-approved service products approved by us are available at your authorized Mercedes-Benz Center.

Service Products

Approved Engine Oils

For Vehicles Without Flexible Service System (FSS or FSS PLUS) - U.S. vehicles Model Year 1997 and earlier

IMPORTANT: Engine oils are labeled on the container with various ACEA (Association des Constructeurs Européens d'Automobiles) and/or API (American Petroleum Institute) designations of quality. Mercedes-Benz recommends the use of MB-approved engine oils listed in the Mercedes-Benz oil specification sheet

229.3 or 229.5 which also meet ACEA and/or API classifications listed on the chart below. If a MB-approved or ACEA quality engine oil is not available, then an API quality engine oil meeting the below listed API classification can be used. Only engine oils (including synthetic) with any of the following classification grades, or

combinations thereof, are approved. Always refer to the viscosity chart (▷ page 5) for the proper viscosity grade based on ambient temperature. Note: This chart supersedes ALL previously published viscosity charts. For additional information, please refer to the Operator's Manual.

U.S. Vehicles Model Year 1997 and Earlier Engine Oils

Engine	MB Sheet	ACEA Classification ¹	API Classification ¹
Gasoline	229.3	A3	SJ
	229.5	B3	SL
Diesel	229.3	B2	CF-4
	229.5	B3	CG-4
		B4	

¹ Only if MB sheet 229.3 or 229.5 is not available

Approved Engine Oils

For Vehicles With Flexible Service System (FSS or FSS PLUS) - U.S. vehicles Model Year 1998 - Model Year 2004 Mercedes-Benz recommends that you use only MB-approved synthetic motor oil or all vehicles equipped with the Flexible Service System (FSS or FSS PLUS). Conventional petroleum-based oils must not be used on vehicles equipped with the

Flexible Service System on older vehicles. The engine oil used does not meet the above mentioned standard, engine damage is possible, which is not covered by the Mercedes-Benz New Vehicle Limited Warranty.

Mercedes-Benz recommends that you use only oil additives not recommended by Mercedes-Benz USA and may result in damage to the engine which is not covered by the Mercedes-Benz New Vehicle Limited Warranty.

U.S. Vehicles Model Year 1998 - 2004 Engine Oils

MB-Approved Synthetic Engine Oil	MB Sheet
Mobil Formula 0 -40	22.5
Mobil SuperSyn European Car Formula 0 -40	22.5
Castrol Syntec European Formula 0 -30	22.5
Pennzoil European Formula Ultra 5 -30	22.5
Mer State European Formula Ultra 5 -30	22.5
LF xcellium 22.5 5 -30	22.5
Mobil SP Formula M 5 -40 (Diesel only)	22.5
LF Solaris LS 5 -30 (Diesel only)	22.5

Not approved for use in AM engines.
22.5 is only approved for diesel engines.

MB-Approved Synthetic Engine Oil	MB Sheet
Mobil SuperSyn European Car Formula 0 -40	22.3
Castrol Syntec 5 -40	22.3
LF xcellium LD 5 -40	22.3
LF xcellium LD 0 -30	22.3
Mer State Full Synthetic European Formula 5 -40	22.3
Pennzoil Synthetic European Formula 5 -40	22.3
76 Pure Synthetic Motor Oil 5 -40	22.3
Endall - Full Synthetic Motor Oil 5 -40	22.3
Motul 800 -Tech 0 -40	22.3
Motul 800 -Cess 5 -40	22.3
Shell elix Ultra 5 -30	22.3
Shell elix Ultra 5 -40	22.3
Shellviline SynPower M L 0 -30	22.3

Service Products

Approved Engine Oils

For Vehicles With Mercedes-Benz Maintenance System - U.S. vehicles as of Model Year 2005

Mercedes-Benz recommends that you use MB 22 .5 or MB22 .5 approved synthetic motor oil or all vehicles equipped with the Mercedes-Benz Maintenance System. Conventional petroleum-based oils must not be used on vehicles equipped with the Mercedes-Benz Maintenance System.

the engine oil used does not meet the above mentioned standard, engine damage is possible, which is not covered by the Mercedes-Benz New Vehicle Limited Warranty.

Use of any oil additives is not recommended by Mercedes-Benz USA and may result in damage to the engine which is not covered by the Mercedes-Benz New Vehicle Limited Warranty.

U.S. Vehicles Model Year 2005 to the Present Engine Oils


MB-Approved Synthetic Engine Oil	MB Sheet
Motor Oil Formula 0 -40	22 .5
Motor Oil SuperSyn European Car Formula 0 -40	22 .5
Castrol Syntec European Formula 0 -30	22 .5
Pennzoil European Formula Ultra 5 -30	22 .5
Quaker State European Formula Ultra 5 -30	22 .5
Lucas xcellium 22 .5 5 -30	22 .5
Motor Oil SP Formula M 5 -40 (Diesel only)	22 .5
Alvoline SynPower MS 5 -30 (Diesel only)	22 .5
LF Solaris LS 5 -30 (Diesel only)	22 .5

As of model year 2007 diesel engines must only use 22 .5 approved engine oil. 22 .5 is only approved for diesel engines. Not approved for use in AM engines.

! 22 .5 or 22 .5 engine oils must be used in conjunction with the oil filter (see page 4) in vehicles with Mercedes-Benz Maintenance System (as of Model Year 2005). Using other oil filters may lead to engine damage which is not covered by the Mercedes-Benz Limited Warranty.

Using the chart below, select oil viscosity according to the lowest air temperature expected before the next oil change.

Oil Viscosity Chart

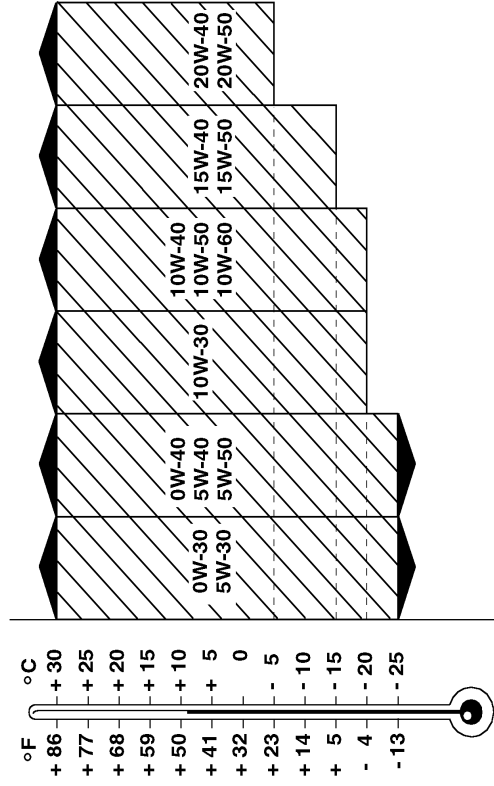

Service Products

Approved Dexron III Automatic Transmission Fluid¹

Castrol Dexron- /Mercon A F F-3034	Dexron Super lo A F Dexron F-30	Mercon F30 6
Castrol Transmax M-22257/220 6	avoline A F Mercon/Dexron- F-3032	Sunoco A F Dexron- /Mercon F-30 76
Chevron A F Dexron F-30 08/30 5	exaco A F Mercon/Dexron- F-3032	Unocal Multi-Purpose A F D-224 3/2243
Citgo Multi-Purpose A F D-2 57	Pennzoil A F D-224 3/F-30 0	alvoline A F ype D

Please see your Mercedes-Benz Center regarding applications. Do not use in 722.6 or 722. transmission

Service Products

Fuel Requirements

Gasoline Engines

Formulated gasolines (F) and/or unleaded gasoline containing oxygenates such as ethanol, AM , B , PA, BA, and BA can be used provided that the ratio of any one of these oxygenates to gasoline does not exceed 0.1. M B may be added up to 5. The ratio of Methanol to gasoline must not exceed 3 plus co-solvents.

Mixtures of ethanol and Methanol must not be used. Gasohol, which contains 0 ethanol and 0 unleaded gasoline, can also be used. These blends must also meet all other fuel requirements such as resistance to spark knock, oiling range, vapor pressure, etc.

Gasoline Additives

Do not be concerned among various engine manufacturers is the carbon build-up caused by gasoline. Mercedes-Benz recommends using only quality gasoline containing additives that prevent the build-

up of carbon deposits.

After an extended period of using fuels without such additives, carbon deposits can build up, especially on the intake valves and in the combustion area, leading to engine performance problems such as warm up hesitation, unstable idle, knock/pinging, misfire, and power loss.

In areas where carbon deposits may be encountered because gasoline with additives are not available, Mercedes-Benz recommends the use of additives approved by us or use on Mercedes-Benz vehicles (▷ page 5).

Do not blend other fuel additives with the fuel. These additional additives only result in unnecessary cost and may be harmful to engine operation.

Damage or malfunction resulting from poor fuel quality or from blending additional fuel additives other than those tested and approved by us or use on Mercedes-Benz vehicles (▷ page 5) are not covered by the Mercedes-Benz Limited Warranty or any pre-owned or extended Limited warranties.

Premium Unleaded

Use only premium unleaded gasoline meeting ASTM standard D43. The octane number posted at the pump must be at least minimum in the U.S., this octane number is an average of the research octane number (R) and the Motor octane number (M) / 2. The octane number is also known as the Anti-knock index.

Service Products

Fuel Requirements

Gasoline Engines (continued)

To maintain engine durability and performance, use only premium unleaded gasoline. Premium unleaded is not available and low octane gasoline is used, follow these precautions:

Partially fill the fuel tank with

unleaded regular gasoline and fill up with premium unleaded as soon as possible.

Avoid full throttle driving and abrupt acceleration.

Do not exceed engine speeds of 2000 rpm if the vehicle has a light

load - such as two occupants and no luggage.

Do not exceed 2/3 of maximum accelerator pedal position if the vehicle is fully loaded or operating in mountainous terrain.

As of model year 1987

All gasoline engine models require premium unleaded gasoline.

Model year 1986

All gasoline engine models, except the 2.3 require premium unleaded gasoline.

Model years 1975 - 1985 and model year 1986 190 E 2.3

Use unleaded regular gasoline meeting AS M standard D43. The octane number posted at the pump must be at least 87 min.

Model years 1972 - 1974

Use leaded or unleaded gasoline meeting AS M standard D43. The octane number posted at the pump must be at a minimum of 87. When only unleaded gasoline is being used, check the valve clearance on engines with mechanically adjusted valves at half the recommended interval.

Pre-model year 1972

Use premium unleaded gasoline meeting AS M standard D43. The octane number posted at the pump must be at a minimum of . Check the valve clearance at half

the recommended interval.

Flexible Fuel Vehicles

Flexible Fuel Vehicles - As of Model year 2003 - 2005

Use premium unleaded gasoline (see gasoline engines) or ethanol (E85) fuel to operate Flexible Fuel vehicles. Models capable of operating with E85 are identified by a label reading Premium gasoline or E85 only! on the fuel filler flap. For information on Flexible Fuel vehicle operation, refer to the Operator's Manual.

Diesel Engines

Diesel Engines as of model year 2007
 All diesel engines require S 5 Ultra Low Sulfur Diesel (ULSD) fuel (15 ppm Sulfur maximum). Failure to use ULSD fuel can severely damage the vehicle's exhaust after-treatment device. Refer to Product Information (page 4) or a sample of diesel fuel pump labeling.

Diesel Engines - Model year 2006 and prior
 Use only commercially available vehicular diesel fuel number 2 or number (AS MD 75 Number 2-D or Number -D).

As of model year 2005
 For information on cold weather operation, refer to the vehicle Operator's Manual.

Pre-model year 1999
 For information on cold weather operation, refer to the vehicle Operator's Manual or Service Information MBNA 00/7(-82).

B5 Biodiesel

Mercedes-Benz approves the use of B5 Biodiesel (standard diesel with a maximum of up to 5% Biodiesel content) in all Common rail injection Diesel CD engines. Diesel fuels containing a higher percentage of Biodiesel content will cause damage to your engine and are not approved.

As Biodiesel can be refined from a variety of raw materials resulting in widely varying properties, the only approved Biodiesel content is one that meets AS MD675 specification. It must also have the necessary oxidation stability (min. 6h, proved with N 4 2 method) to prevent damages to the system from deposits and/or corrosion.

Please use your service station or further

information. The B5 Biodiesel blend is not sufficiently labeled to clearly indicate that it meets the above standards, please do not use it. The Mercedes-Benz limited warranty does not cover damage caused by the use of fuels not meeting Mercedes-Benz approved fuel standards.

Service Products

Product Information

Brakes	Product Name / Part Number	-Class (463)	M-Class (64)	-Class (25)	L-Class (64)	C-Class (204)	-Class (2)	S-Class (22)	SL -Class (7)	CL -Class (20)	CLS-Class (2)	SL-Class (230)	CL-Class (2 6)
Bra e Fluid (DO 4 Plus)	MB Bra e Fluid	•	•	•	•	•	•	•	•	•	•	•	•
	MB Part No. A000 8 08 07 0												
	(1.00 l container)												
	MB Part No. A000 8 08 07 0												
Bra e Pad Paste	Mo il Bra e Fluid DO 4 Plus	•	•	•	•	•	•	•	•	•	•	•	•
	MB Bra e Pad Paste												
	MB Part No. A00 8 4 5												

Service Products

Product Information

Limited slip differential mechanism	Product Name /Part Number	-Class (463)	M-Class (64)	-Class (25)	L-Class (64)	C-Class (204)	-Class (2)	S-Class (22)	SL -Class (7)	CL -Class (20)	CLS-Class (2)	SL-Class (230)	CL-Class (2 6)
ypoid ear Oil G55 AMG Kompressor For front and rear axle differentials	Castrol SAF- J (75 - 40)	•											
ypoid ear Oil SL65 AMG (all model variants) E63, SL55 AMG, CLS55 AMG, and CLS63 AMG equipped with AMG Performance Package only. For rear axle differentials	Castrol SAF- J (75 - 40)										•	•	
Differential (Front and Rear Axle)													
ypoid ear Oil except G55 AMG Kompressor For front and rear axle differentials	MB ypoid ear Oil (75 - 0) ² MB Part No. A00 8 28 03 0	•											
ypoid ear Oil except SL65 AMG (all model variants) except SL55 AMG, CLS55 AMG, and CLS63 AMG equipped with AMG Performance Package For front (where applicable) and rear axle differentials	MB ypoid ear Oil (85 - 0) ³ MB Part No. A00 8 7 03 0												

Please see your Mercedes-Benz Center regarding applications. ² Meets sheet 235.0 specification. ³ Meets sheet 235.7 specification.

Service Products

Product Information

Differential (Front and Rear Axle) (continued)	Product Name / Part Number	-Class (463)	M-Class (64)	-Class (25)	L-Class (64)	C-Class (204)	-Class (2)	S-Class (22)	SL -Class (7)	CL -Class (20)	CLS-Class (2)	SL-Class (230)	CL-Class (2 6)
Bran e Fluid For differential lock mechanism	MB Bran e Fluid (DO 4 Plus)	•											
	MB Part No. A000 8 08 07 0 (.00 l container)												
	MB Part No. A000 8 08 07 0 (5.00 l container)												
ypoid ear Oil For front and rear axle differentials with or without differential locks	MB ypoid ear Oil		•	•	•								
	MB Part No. A00 8 33 03 0												
ypoid ear Oil For front axle differentials with differential locks	MB ypoid ear Oil	•											
	MB Part No. A00 8 33 03 0												
ypoid ear Oil For rear axle differentials with differential locks	MB ypoid ear Oil				•								
	MB Part No. A00 8 5 03 0												
Engine													
Supercharger Oil - engine M 3	Mo il Jet Oil	•					•					•	•
Approved engine Oils - All models	Model year 2005 and later, see page 4 (prior model years, see pages 2 and 3)	•	•	•	•	•	•	•	•	•	•	•	•

¹ Compressor indicates supercharger oil required.

Service Products

Product Information

Fleece oil filter or oil filter element or use with engine oils meeting 22.5 or 22.5 specification (in vehicles with MB Maintenance System as of M 2005)	Product Name /Part Number	engine 2 engine 3 engine 56 engine 272 engine 273 engine 275 engine 642 engine 648
	MB Part No. A000 80 26 0	•
	MB Part No. A275 80 00 0	•
	MB Part No. A6 3 80 00 0	•
	MB Part No. A000 80 30 0	•
	MB Part No. A642 80 00 0	•

1 Use only with fuel marketed as ULSD.



Refer to the Operator's Manual or the engine designation of your model. The engine and model listing can be found in chapter technical Data under engine.

Use of fleece oil filters is not mandatory on vehicles prior to M 2005.

Service Products

Product Information

Engine	Product Name / Part Number																				
Fuel additive for gasoline engines	MB Part No. A000 8 25 45 2 (100 ml, 3.4 fl oz container)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Technon Concentrate Plus Fuel System Cleaner (588 ml, 20 fl oz container)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

!

Follow directions of use on label.

Always use fuel additive when the vehicle is operated in areas where carbon deposits may be encountered due to lack of availability of gasolines which contain these additives. Refer to Fuel requirements (> page 7) or additional information.

Service Products

Product Information

Greasing Points	Product Name/Part Number	-Class (463)	M-Class (64)	-Class (25)	L-Class (64)	C-Class (204)	-Class (2)	S-Class (22)	SL -Class (7)	CL -Class (20)	CLS-Class (2)	SL-Class (230)	CL-Class (2 6)
Chassis grease (NL Class 0) For all greasing points except front wheel hubs	Shell etinax C	•	•	•	•	•	•	•	•	•	•	•	•
Multi-Purpose grease (NL Class 2) For all greasing points except front wheel hubs	3752 Almaguard Multi-Purpose Lubricant Castrol LM release Molixon Multi-Purpose release Enolite MP Unocal MP Automotive release	•	•	•	•	•	•	•	•	•	•	•	•
Long term Lubricating grease (NL Class 2) For release bearing, release arm and splines or connecting linkage on level control valves	Molybdenum Longterm 2 Plus MB Long term release MB Part No. A000 8 63 5	•	•	•	•	•	•	•	•	•	•	•	•
MB Long term release For propeller shaft - universal joints	MB Long term release MB Part No. A000 8 63 5	•											
High temperature Anti friction grease (NL Class 2) For joint housing	High temperature Anti friction grease MB Part No. A002 8 00 5 0	•											

Service Products

Product Information

Greasing Points	Product Name / Part Number	-Class (463)	M-Class (64)	-Class (25)	L-Class (64)	C-Class (204)	-Class (2)	S-Class (22)	SL -Class (7)	CL -Class (20)	CLS-Class (2)	SL-Class (230)	CL-Class (2 6)
Complex grease (NL Class 2) For sliding loc's tilt/sliding roof	MB Lu rication Paste MB Part No. A00 8 46 5												
Lu ricant For lu ricating outer guide rail o panorama roof	MB Special Lu ricant MB Part No. A000 8 36 60												
Lu ricating paste For cleaning outer/inner channel, shi t gate, pivot arm o wind de lector o top sliding roof (panorama roof)	MB Lu rication Paste MB Part No. A00 8 46 5												
Hydraulic Oil For hydraulic so t top, retracta le hardtop	MB Hydraulic Oil MB Part No. A000 8 03 0												
High temperature roller Bearing grease (NL Class 2) For front wheel bearings	MB High temperature Anti riction grease MB Part No. A002 8 00 5 0												

Service Products

Product Information

Greasing Points	Product Name / Part Number	-Class (463)	M-Class (64)	-Class (25)	L-Class (64)	C-Class (204)	-Class (2)	S-Class (22)	SL -Class (7)	CL -Class (20)	CLS-Class (2)	SL-Class (230)	CL-Class (2 6)
Fluid rease (NL Class 00) For door loc pin and stri er eye	Castrol CLS rease												
Li uid rease (NL Class 00) For door loc s	xxon Mo il Chassis rease LB xxon Mo il rease CL 435 MB Li uid rease MB Part No. A00 8 08 5 0	•											
Active Body Control Fluid	MB ABC Fluid MB Part No. B 32 000							•				•	•
Power Steering													
Steering ear Lu ricant - Power Steering	MB Power Steering Fluid MB Part No. B 32 000 Pentosin C F S											•	•
Steering ear Lu ricant - Power Steering	MB Power Steering Fluid MB Part No. B 46 000 or an approved Dexron A F (△ page 6)	•	•	•	•								

Service Products

Product Information

Transmission	Product Name / Part Number	-Class (463)	M-Class (64)	-Class (25)	L-Class (64)	C-Class (204)	-Class (2)	S-Class (22)	SL -Class (7)	CL -Class (20)	CLS-Class (2)	SL-Class (230)	CL-Class (2 6)
Automatic transmission Fluid (or 722.6 5-speed transmissions)	MB Automatic transmission Fluid MB Part No. A00 8 2 03 0	•				•	•	•	•	•	•	•	•
	Do not use on vehicles with 722. (7-speed) transmission.												
Automatic transmission Fluid (or 722. 7-speed and 722.6 5-speed transmissions)	MB Automatic transmission Fluid MB Part No. A00 8 45 03 3	•	•	•	•	•	•	•	•	•	•	•	•
	Can e used on vehicles with 722.6 (5-speed) transmission. <u>Must</u> e used on vehicles with 722. (7-speed) transmission.												
Manual transmission Fluid For MB Manual transmission - 5- and 6-speed	MB Manual transmission Fluid MB Part No. A00 8 26 03 0					•			•				

Please see your Mercedes-Benz Center regarding applications. Earlier model series other than the ones listed here may require different automatic transmission fluids. Always ensure correct transmission fluid is used. Contact an authorized Mercedes-Benz Center or proper service product selection for your vehicle model and model year.

Service Products

Product Information

Windshield Washing System	Product Name / Part Number
Windshield Washer Concentrate	M-Class (64)
	-Class (25)
	L-Class (64)
	C-Class (204)
	-Class (2)
	S-Class (22)
	SL-Class (7)
	CL-Class (20)
	CLS-Class (2)
	SL-Class (230)
CL-Class (26)	

MB SummerFit Formula
 MB Part No. A00 86 80 7 0 (40 ml)
 Suggested Mixing Ratio (1:100)

Application Temperature	MB SummerFit	Added to	Water	Solvent
Summer use (above 32° F)	40 ml	added to	allison	none
Winter use (below 32° F)	40 ml	added to	allison	allison

Failure to use winter protection solvent in winter may result in a cracked washer fluid reservoir, which will not be covered by the Mercedes-Benz Limited Warranty.

Pre-mixed windshield washer solvent (commercially available blue concentrate with winter protection in 1-gallon container)

Service Products

Product information

Vehicle Care	Product Name / Part Number																				
<p>Vehicle Care - Exterior Care - Vehicle Washing</p> <p>Highly concentrated conditioning shampoo specially formulated to loosen and foam away surface contaminants, enhancing the finish and extending protection. Refer to product container for application and instructions on how to use product.</p>	Mercedes-Benz Car Shampoo	B 6 8 00 2																			
<p>Vehicle Care - Exterior Care - Paint Cleaner</p> <p>Paint cleanser for removing surface blemishes, oxidation, and bonded contaminants that need some extra help. Refer to product container for application and instructions on how to use product.</p>	Mercedes-Benz Paint Cleaner	B 6 8 00 3																			
<p>Vehicle Care - Exterior Care - Paint Care</p> <p>Paint care product for paint finishes that are free of serious oxidation, blemishes and bonded contaminants (these conditions exist, pre-clean with Mercedes-Benz Paint Cleaner). Removes light surface blemishes, polishes the finish to a brilliant high gloss and coats the finish for exceptional protection. Refer to product container for application and instructions on how to use product.</p>	Mercedes-Benz Paint Care	B 6 8 00 4																			

Service Products

Product Information

Vehicle Care	Product Name / Part Number																		
<p>Vehicle Care - Paint Care For easy removal of fresh contaminants like tree sap, mist and hard water spots without water when they first occur. Fills the void between vehicle washing and waxing. Refer to product container for application and instructions on how to use product.</p>	Mercedes-Benz B 6 8 00 8	Mercedes-Benz	M-Class (64)	-Class (25)	L-Class (64)	C-Class (204)	-Class (2)	S-Class (22)	SL-Class (7)	CL-Class (20)	CLS-Class (2)	SL-Class (230)	CL-Class (26)						
	<p>Exterior Care - wheels Helps remove brake dust and other road grime on wheels. Refer to product container for application and instructions on how to use product.</p>	Mercedes-Benz B 6 8 00 7	Mercedes-Benz																
		Mercedes-Benz B 6 8 00 0	Mercedes-Benz																
	<p>Exterior Care - tires Helps keep tires looking new. Refer to product container for application and instructions on how to use product.</p>	Mercedes-Benz B 6 8 00 6	Mercedes-Benz																

Service Products

Product information

Vehicle Care	Product Name /Part Number		
<p>Interior Care - Leather seats Helps clean, feed and condition leather. Refer to product container for application and instructions on how to use product.</p>	Mercedes-Benz Leather Seat Care B 6 8 00 5	<ul style="list-style-type: none"> • -Class (463) • M-Class (64) • -Class (25) • L-Class (64) • C-Class (204) • -Class (2) • S-Class (22) • SL -Class (7) • CL -Class (20) • CLS-Class (2) • SL-Class (230) • CL-Class (2 6) 	
		<p>Do not use Mercedes-Benz Leather Seat Care or any solvents to clean nu uc leather surfaces. Nu uc leather may e permanently discolored and should e da ed with a dry micro i er cloth or oil stains and a damp one or dust or light stains.</p>	
	<p>Interior Care - Carpet, a ric Gentle stain remover for carpet and fabric surfaces. Refer to product container for application and instructions on how to use product.</p>	Mercedes-Benz Carpet Fa ric Care B 6 8 00	<ul style="list-style-type: none"> • • • • • • • • • • •

Service Products

Notes

Service Products

Notes

Service Products

Notes

Distributor in the United States:
Mercedes-Benz USA, LLC
One Mercedes Drive, P.O. Box 350
Montvale, NJ 07645-0350

Order No. S-0473-08B (8/07)

© 2007 Mercedes-Benz USA, LLC
A DaimlerChrysler Company
www.MBUSA.com
Printed in U.S.A.