


MODEL 211.0 /2

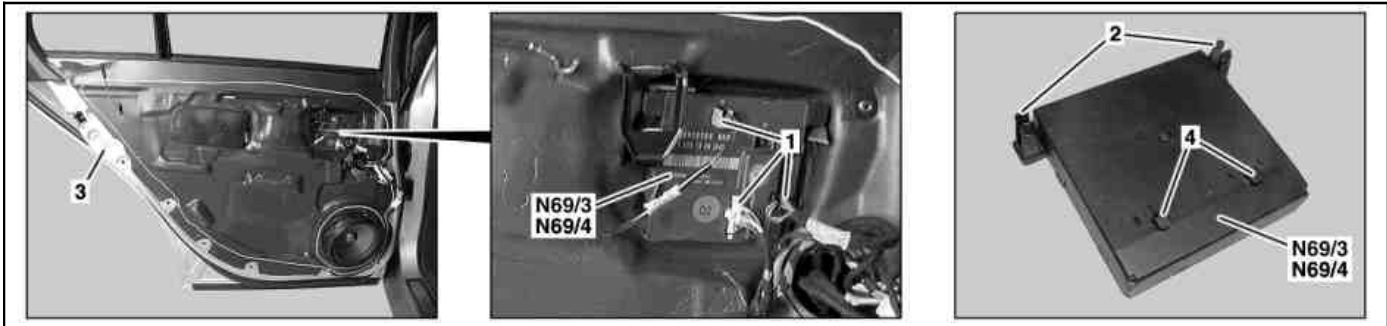

P72.29-2119-07

**Shown on left rear door**

1 Electrical connectors  
2 Catch hook

3 Inner door panel  
4 Holding lugs

N69/3 Door control unit rear left  
N69/4 Door control unit rear right

**Modification notes**

6.6.06	"Disconnect/connect battery ground line" removed		
--------	--	--	--

		<b>Remove/install</b>	
1		Remove rear door lining	On vehicles except code (Z04) Light armoring On model 211.065/070 with code (Z04) Light armoring <span style="color: red;">AR72.12-P-1010T</span> <span style="color: red;">AR72.12-P-1010TG</span>
2		Separate electrical connectors (1)	
3		Unclip left rear door control unit (N69/3) and right rear door control unit (N69/4) on catch hooks (2) from inner door panel (3)	<b>i</b> Press catch hooks (2) together with suitable pliers. <b>i</b> <b>Installation:</b> Ensure that holding lug (4) is seated properly in inner door panel (3)
4		Install in the reverse order	