


MODEL 203, 209



P54.25-2363-09

Illustrated on model 203.0

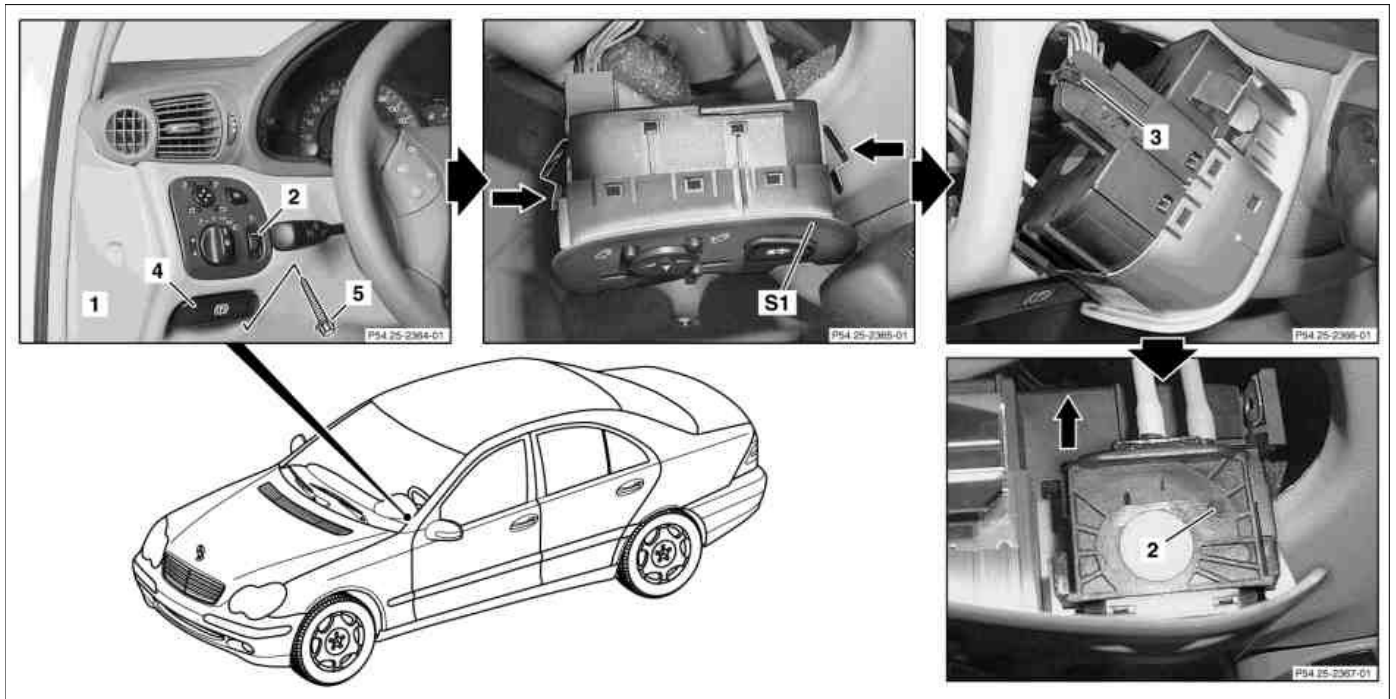



- 2 Headlamp range controller
- 3 Clutch
- 4 Parking brake release

- 5 Bolt
- S1 Light switch module

1 Side cover

Modification notes

24.5.06	"Disconnect/connect ground line on battery" removed		
---------	---	--	--

 	Remove/install		
1	Remove side cover (1)		
2	Remove screw (5)		Pull out parking brake release (4).
3	Unclip and remove lamp switch module (S1)		Unclip in direction of arrow.
4	Release connector (3) and disconnect		
5	Unlock headlamp range adjuster (2) and detach from lamp switch module (S1) (arrow)		Except code (612b) xenon headlamp unit
6	Install in the reverse order		