
AP00.20-U-1	206AA S	SERVICE SHEET for F	exible Service Sy	/stem (FSS) (USA)		3.12.02
MODEL 203 MY 2	2003					
USA/CANADA: System is also k	known as "Active	el Year 2003 Service System Immation System (WIS)	Мо	del 203		
Client	t:			Repair order number:		
Confirm work h performed by s					e last performed cles start with B	
Technician:						
		Determine r	eed for service:	B ↓	Ā	
P	lease define type of	service to be performed here!		•		
0	Current	odomete	r reading:			
	•	erformed a	it mi/km:			
C	Difference	i	n mi/km:			
L						

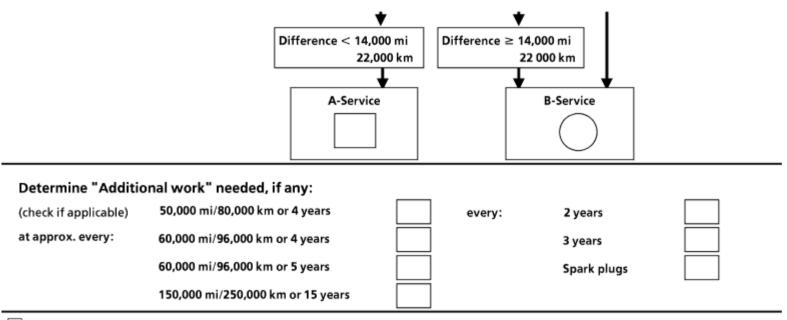

i See last page for "Additional work".

Determining need for A-Service or B-Service:

If the distance driven since the last "B-Service" is less (<) than 14,000 miles/22 000 km (as determined from Service Booklet or retailer records), an "A-Service" should be performed.

If the distance driven since the last "B- Service" is greater ( $\geq$ ) than 14,000 miles/22 000 km (as determined from Service Booklet or retailer records), a "B-Service" should be performed.

Additional flat rates apply for procedures marked with **FAP**.

completed⊠ ↓	A-Service	□ <sup>O</sup> B-Service Not O.K. ↓↓↓	
6 <b>4</b>	Vehicle passenger compartment		
	Function check		
	Warning/indicator lamps, illumination and interior lighting	80	

	Windshield wipers, windshield washer system		AP82.35-P-8252BA
	Headlamp cleaning system	880	
	Check seat belts for damage and proper function	80	AP91.40-P-9150P
	Reset FSS counter in instrument cluster	$\boxtimes \otimes$	
, C	Wheels, brakes		
	Check front brake pads for lining thickness (remove right front wheel)		AP42.10-P-4251BP
	Check brake pads for lining thickness front/rear	80	AP42.10-P-4251BP
	Check condition of brake discs front and rear	80	AP42.10-P-4251BP
	Inspect tires for damage and condition	⊠⊗⊡	<u>AP40.10-P-4051Z</u>
	Measure tread depth, enter in mm:	⊠⊗⊡	<u>AP40.10-P-4051Z</u>
	LF RF LR RR		
	outside		
	center		
	inside		
	Correct tire inflation pressure	⊠⊗⊡	
ÇĘÐ	Vehicle under body		
	Visual check for Leakage - Major components Chafe marks, line routing, components. In the event of leakage, determine cause and perform repair via separate work order.	80	AP00.20-P-0053BA
	Check condition of front axle ball joints and rubber boots	80	AP33.20-P-3353BP
	Check condition of steering's mechanical components and rubber boots	80	AP46.00-P-4653F
	Engine compartment		

Visually check Leakage - Major components Chafe marks, line routing, components. In the event of leakage, determine cause and perform repair via separate work order.	80	AP00.20-P-0053BA
Engine oil and filter change	$\boxtimes \otimes$	
Engine 271		AP18.00-P-0101AB
Engine 112		AP18.00-P-0101AE
Replace dust filter	8	AP83.00-P-8381P
Check and correct fluid level		
Brake system	ØØD	AP42.10-P-4210Z
Power steering	ØD	AP46.00-P-4611P
Windshield washer	$\boxtimes \otimes$	AP82.35-P-8210P
If so equipped: Battery, wet cell Check acid level, replenish		AP54.10-P-5410A
Additionally, check battery condition using "Midtronics MCR 717" Tester. Attach Midtronics MCR 717 Test Report print out here.		<u>AP54.10-U-5453A</u>
If so equipped: Battery, AGM/VRLA, with black housing Check battery condition using "Midtronics MCR 717" Tester Attach Midtronics MCR 717 Test Report print out here.	80	<u>AP54.10-U-5453A</u>
Check condition of poly-V-belt	80	AP13.22-P-1351Z
Check engine hood and safety catch for proper operation. Replace components with even the slightest malfunction.		
Front, rear of vehicle		

<u></u> ]			
	Check wiper blade condition		AP82.30-P-8253G
- <b>É</b>	Trunk		
	Correct tire inflation pressure in spare tire		
	Additional Work		
completed⊠ ↓	Perform:	yes Not O.K. ↓↓	
	At approx. every 50,000 mi/80,000 km or 4 years:		
ie AP □	Check condition of driveshaft flex discs		AP41.10-P-4152Z
	At approx. every 60,000 mi/96,000 km or 4 years:		
AP 🗆	Replace air cleaner filter element		
	At approx. every 60,000 mi/96,000 km or 5 years:		
i <b>e a</b> P □	Replace fuel filter		<u>AP47.20-P-0780PV</u>
AP 🛛	Replace activated charcoal filter		AP83.00-P-8382P
	At approx. every 150,000 mi/250,000 km or 15 years:		
i <b>₽</b> AP □	Replace coolant		<u>AP20.00-P-2080A</u>
	Every 2 years		
AP 🛛	Replace brake fluid		AP42.00-P-4280BP
AP 🗆	Check body for paint damage <b>by Service Advisor</b>		AP98.00-P-9850BA
Mar ⊡	Check chassis and supporting body parts for damage and corrosion <b>by Service Advisor</b>		<u>AP00.20-P-0090BA</u>
	Every 3 years		

₩ <b>₽</b> AP □	Sliding/pop-up roof: clean sliding rails and sliders	<u>AP77.20-P-7731A</u>
₩ <b>₽</b> AP □	Panorama sliding roof: clean and lubricate guide mechanism	<u>AP77.20-P-7732PB</u>
	Replace spark plugs	
AP 🛛	At approx. every 100,000 mi/160,000 km	AP15.10-P-1580A
	or 5 years Engine 112	