


Model 205.0/1
with code 414 (Electric sunroof, glass version)

Model 213.0/1/2
with code 414 (Electric sunroof, glass version)

Model 253
with code 414 (Electric sunroof, glass version)

Model 293
with code 414 (Electric sunroof, glass version)

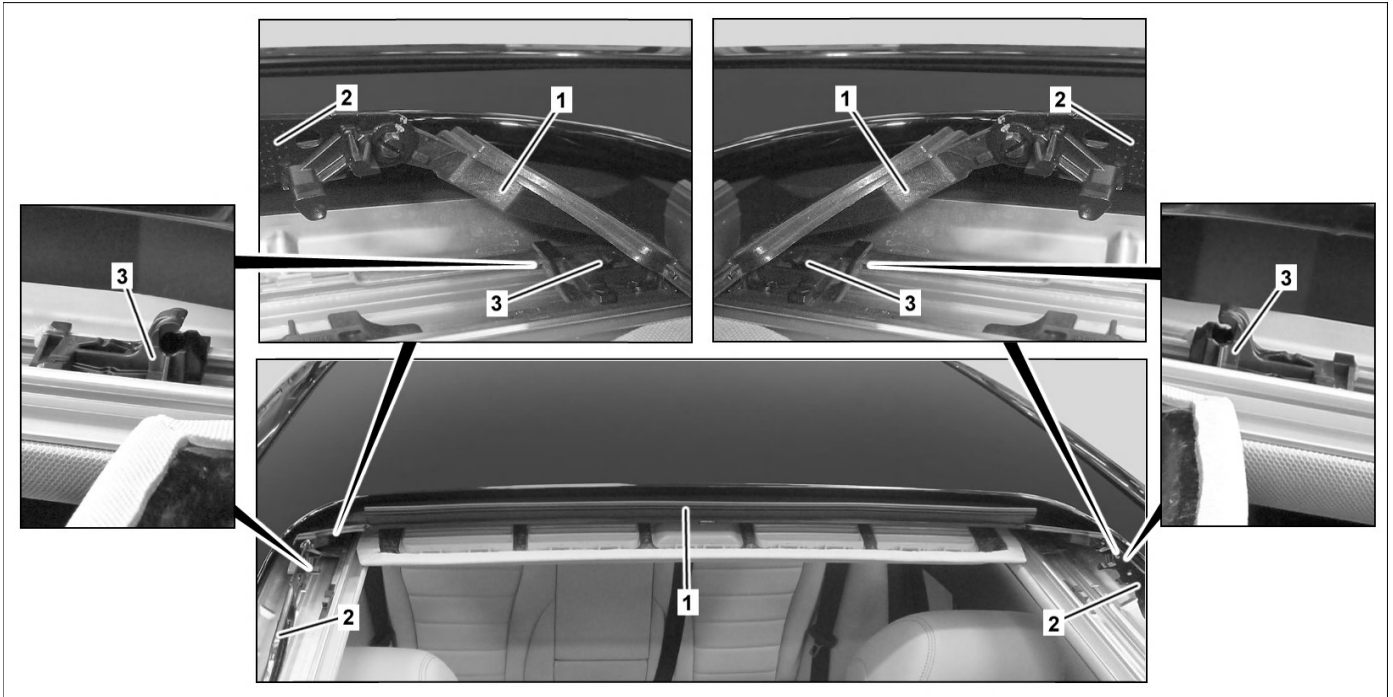



P77.20-2885-09

1 Water drain rail

2 Tilting bracket

3 Slider

 Warning	Risk of injury caused by fingers being jammed or pinched when removing, installing or aligning hoods, doors, trunk lid/rear-end door or sliding roof.	No parts of the body or limbs should be within the operating area when the components are moving.	AS00.00-Z-0011-01A
	Remove/install		
1	Remove sliding roof panel.		AR77.20-P-2852LW
2	Remove water drain rail (1) from tilting brackets (2) on right and left.		
3	Remove water drain rail (1) from the sliders (3) on the right and left.		
4	Check sliders (3) on the right and left for damage.	If there is a problem: ↓ Remove sliding sunroof frame and replace both sliders (3). Model 205.0/1 with code 414 (Electric sunroof, glass version) Model 213.0/1/2 with code 414 (Electric sunroof, glass version) Model 253 with code 414 (Electric sunroof, glass version) Model 293 with code 414 (Electric sunroof, glass version)	AR77.20-P-3000LWE AR77.20-P-3000LW
5	Install in the reverse order.		