

Model 205

Model 253

Model 293

## Shown on fender liner, model 205.0

1.1 Fender liner (front section)

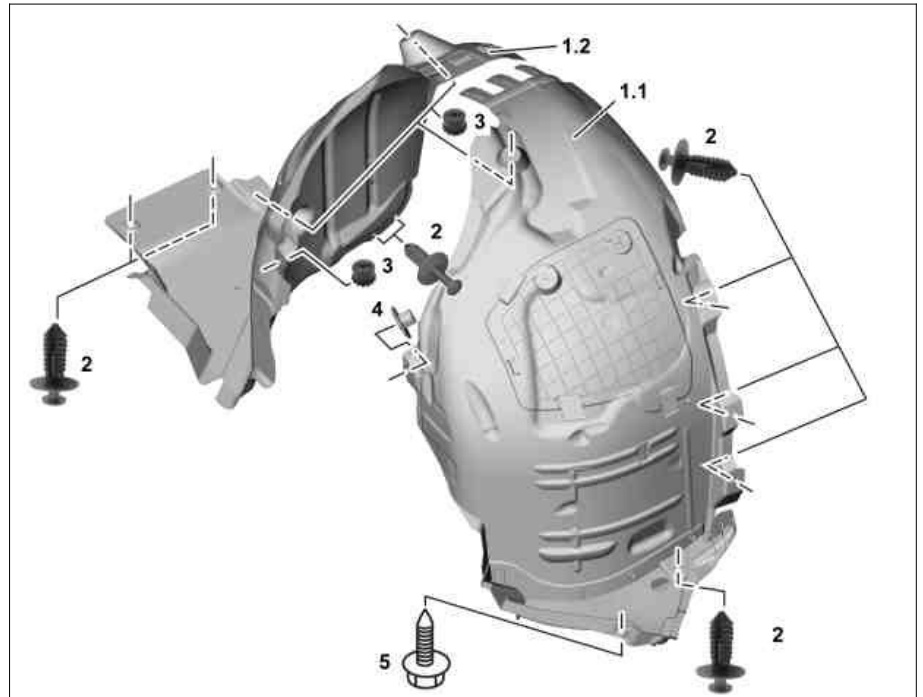
1.2 Fender liner (rear section)

2 Expansion rivet



3 Quick-release couplings

4 Nut

5 Screw



P88.10-2292-06

 	Remove/install		
1	Raise vehicle	Model 205 Model 253 Model 293 Model 205, 253	AR00.60-P-1002LWG
2	Remove screw (5)		
3	Remove expansion rivets (2)		
4	Unscrew nuts (3, 4)		
5	Pull outer edges of fender liner (front section) (1.1) and fender liner (rear section) (1.2) toward inside out of wheel arch lip and remove fender liner (front section) (1.1) and fender liner (rear section) (1.2)		
6	Install in the reverse order		