



Shown on vehicle with code (581) Comfort automatic air conditioning and without code (279) Electronic drive selection stage

- 1 Center console
- 2 Boot
- (without code (279) Electronic drive selection stage)
- 3 Cover
- (without code (279) Electronic drive selection stage)
- 4 Cover

N22/7 Automatic air conditioning control and operating unit
 S16/12 Automatic transmission transmission mode button

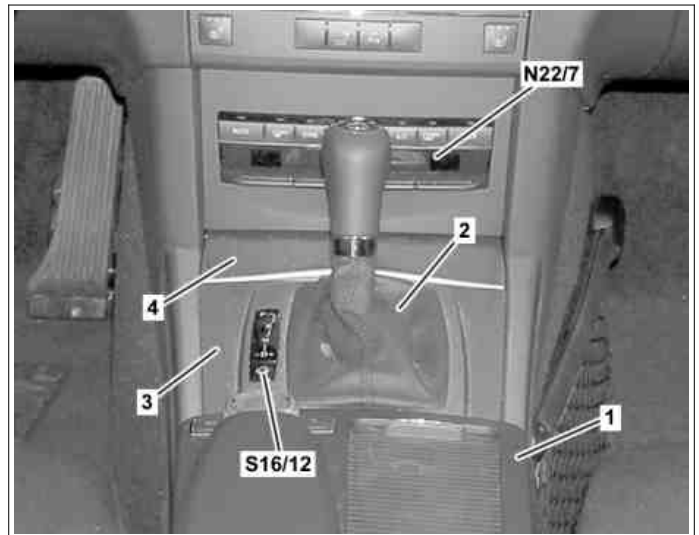

P68.20-4085-11

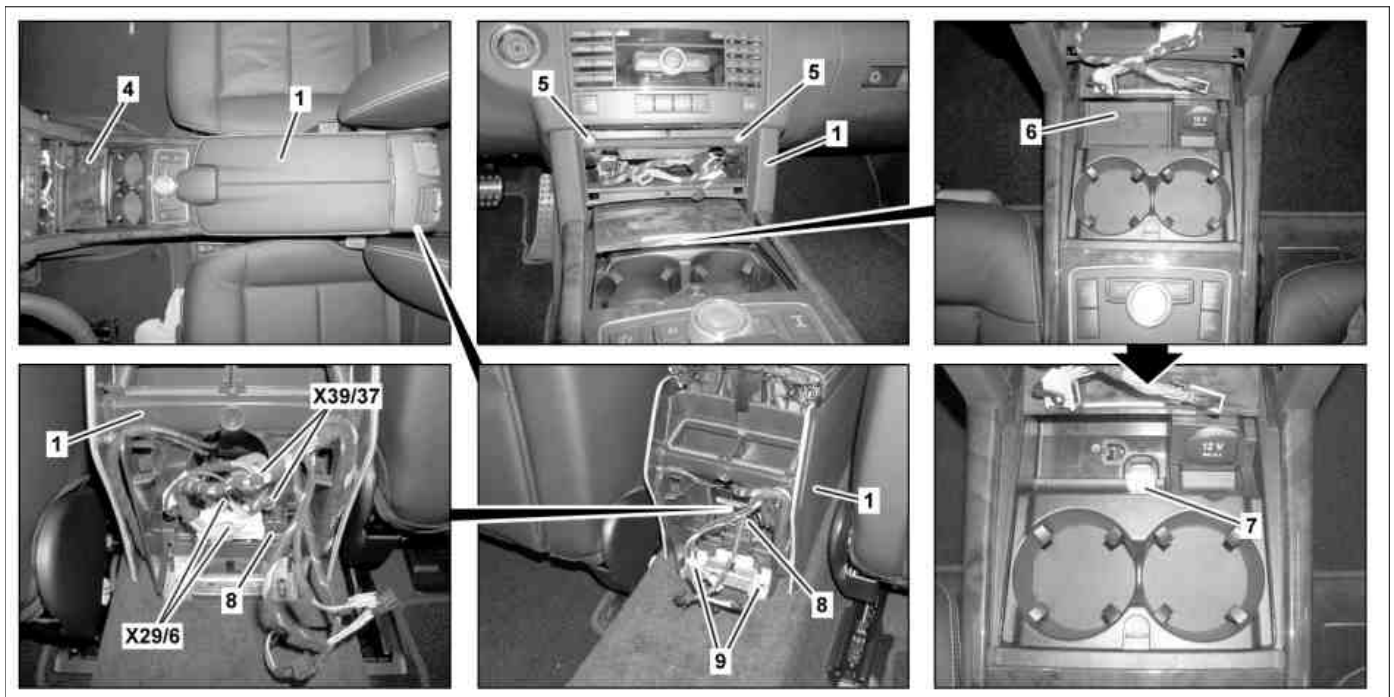


P68.20-4086-09

Shown on vehicle with code (279) Electronic drive selection stage

- 1 Center console
- 4 Cover
- 5 Screw
- 6 Rubber insert
- 7 Screw
- 8 Cover
- 9 Nuts
- X29/6 Center console electrical connector
- X39/37 Electrical connector for mobile phone (with code (386) Comfort telephony)

⚠	Remove/install		
ⓘ	Information on preventing damage to electronic components due to electrostatic discharge		AH54.00-P-0001-01A
1	Remove automatic air conditioning control and operating unit (N22/7)		AR83.40-P-6350EW
2	Switch off ignition and remove transmitter key or KEYLESS-GO start/stop button from electronic ignition lock control unit	ⓘ KEYLESS-GO start/stop button only on vehicles with code (889) Keyless-Go.	
3	Remove bolts (5)		
4	Unclip boot (2) from cover (3).	On vehicles without code (279) Electronic drive selection stage Ⓞ	*115589035900

5	Set selector lever in position "N" or gearshift lever to neutral position	On vehicles without code (279) Electronic drive selection stage i Depending on vehicle configuration.	
6	Open cover (4)		
7	Unclip cover (3) in front area at top and lift until electrical connector on automatic transmission mode button (S16/12) is accessible.	On vehicles without code (279) Electronic drive selection stage i Installation: Check cover mechanism (4) for proper function, if necessary loosen threaded connection of center console (1) and tighten center console (1) without tension.	
8	Disconnect electrical connector from automatic transmission mode button (S16/12) and remove cover (3)	On vehicles without code (279) Electronic drive selection stage	
9.1	Remove rubber insert (6) or ashtray insert	On vehicles with code (279) Electronic drive selection stage i Depending on vehicle configuration.	
9.2	Remove ashtray housing or front stowage compartment	On vehicles without code (279) Electronic drive selection stage	
10	Unscrew bolt (7)		
11	Remove rear ashtray or stowage compartment	i Removal of the stowage compartment corresponds to removal of the rear ashtray.	AR68.20-P-2230EW
12	Unscrew nuts (9)		
13	Fold up cover (8) toward rear and disconnect electrical connectors from center console (X29/6)		
14	Slide back foam rubber jacketing and disconnect electrical connectors from mobile telephone (X39/37)	On vehicles with code (386) Comfort telephony	
15	Remove center console (1) from vehicle	i Installation: Guide wiring harnesses on automatic air conditioning control and operating unit (N22/7) through opening in center console (1). After positioning center console (1) on cover (4) check for proper function, if applicable, slide center console (1) toward rear again and move disturbing wiring harnesses to side.	
16	Install in the reverse order		



Long wedge