

CLS 63 Brake Squeal


**FIXED**

**Step 1: Use a screwdriver / punch to punch out caliper pins**





**Step 2: Use a socket wrench to remove bolt that holds pads in place**

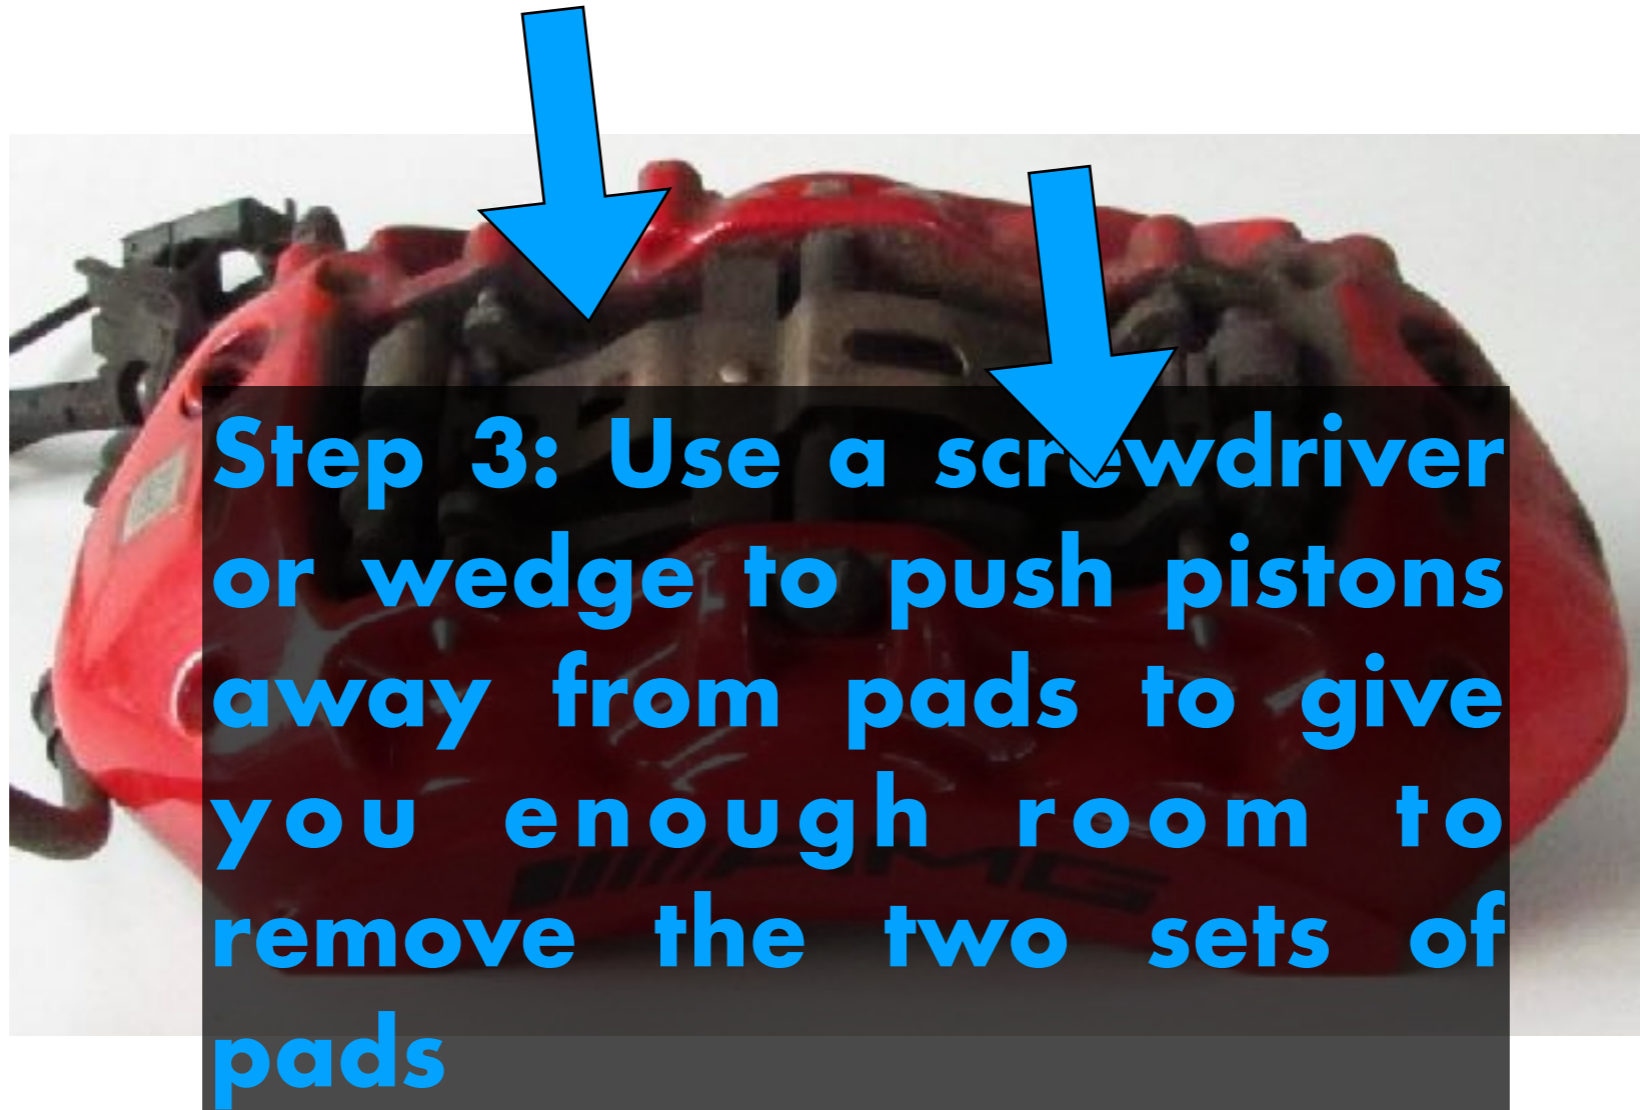

**Step 3: Use a screwdriver or wedge to push pistons away from pads to give you enough room to remove the two sets of pads**

## Step 4: Apply Lubricant to contact surfaces





## Step 5: Apply lubricant to back of pads and anywhere metal

