

MODEL 216.3 as of 2.6.08

MODEL 216.3 with CODE (809) Model year 2009


MODEL 221.0 /1 as of 2.6.08

MODEL 221.0 /1 with CODE (809) Model year 2009

Shown on model 221


- 1 Fuse box cover
- 2 Insulation mat
- 3 Screw
- 4 Cover below dashboard
- 5 Bracket
- 6 Electrical connectors

- G1/7 Additional battery
- N93 Central gateway control unit

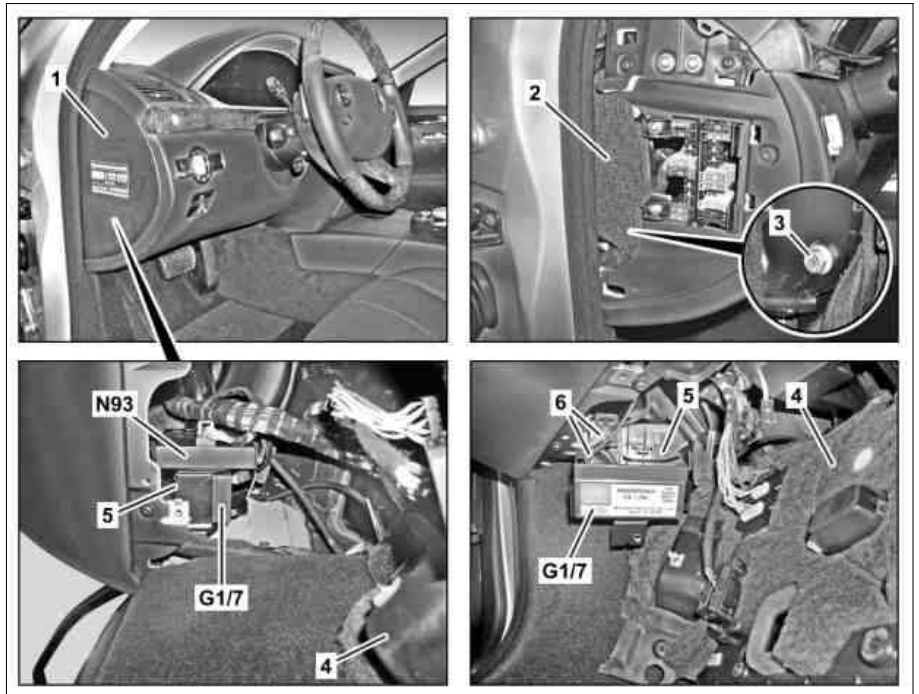

P54.10-2990-06

☒ ☒	Remove/install		
ⓘ	Notes on battery		AH54.10-P-0001-01A
ⓘ	Notes on AGM battery		AH54.10-P-0002-01A
1	Unclip fuse box (1) on instrument panel	☒	*115589035900
2	Take out insulation mat (2)		
3	Loosen cover under instrument panel (4) and place to one side with electrical lines connected	ⓘ	AR68.10-P-1500SX
Only disconnect the electrical connector of the left front footwell lamp.			
4	Unscrew bolt (3)		
5	Remove bracket (5) with additional battery (G1/7) and central gateway control unit (N93) downwards with electrical lines connected		
6	Remove additional battery (G1/7) with electrical lines connected from the bracket (5)		
7	Disconnect electrical connectors (6) from additional battery (G1/7)		
8	Install in the reverse order		



115 589 03 59 00

Long wedge