






MODEL 211.0 /2 /6 as of 1.6.06,
219, 216, 221


Shown on model 219

- 1 Mirror lens
- 2  Mounting wedge
- 3 Catch hook
- 4 Support spring

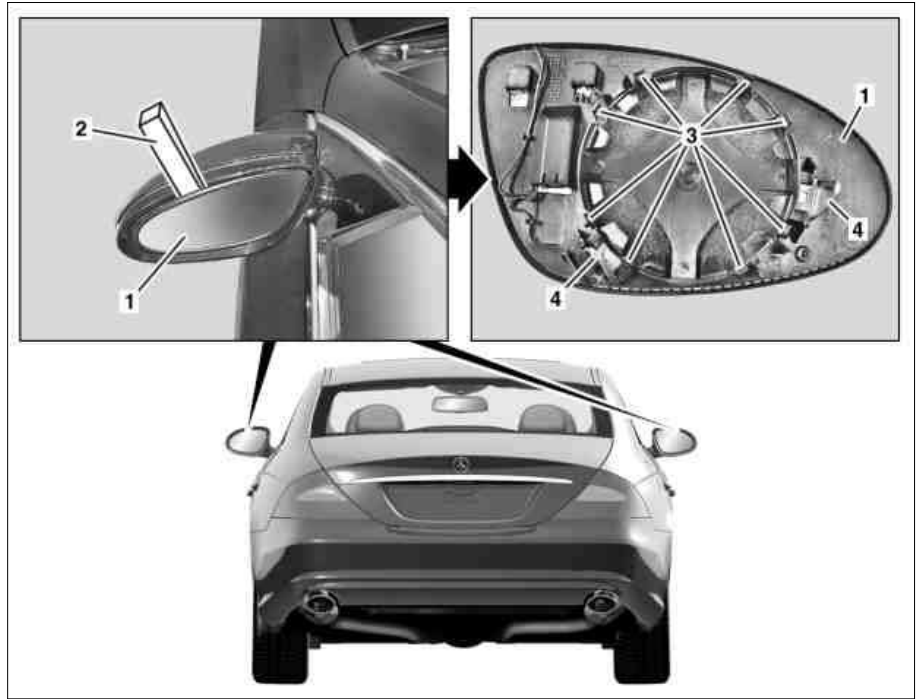

P88.70-2355-06

 	Remove/install		
	Risk of injury Skin, eye and respiratory system irritation may occur through contact or inhalation of substances contained in the mirror lens.	Wear protective gloves and safety glasses.	AS60.00-Z-0008-01R
1	Tilt mirror lens (1) out upward		
2	Press mirror glass (1) off of mirror glass adjustment drive with mounting wedge (2)	 i Installation: Clip mirror lens (1) into glass adjustment drive from bottom upward. Ensure that catch hook (3) arrests completely.	*110589035900
3	Disconnect electrical connectors and remove mirror lens (1)		
4	Install in the reverse order		



110 589 03 59 00

Wedge tool