

Display Document

Sales designation: CLK 500 Cabriolet Vehicle ident. number: WDB209475* Engine number: 113.968 Automatic transmission: 722633 Gr.: **. ** Entry: Mod.Y.: Op. no.:

AR68.30-P-4780QA

Remove/install side paneling in rear


Full-size view

Validity OFF

Page:

2 / 5

MODEL 209.4

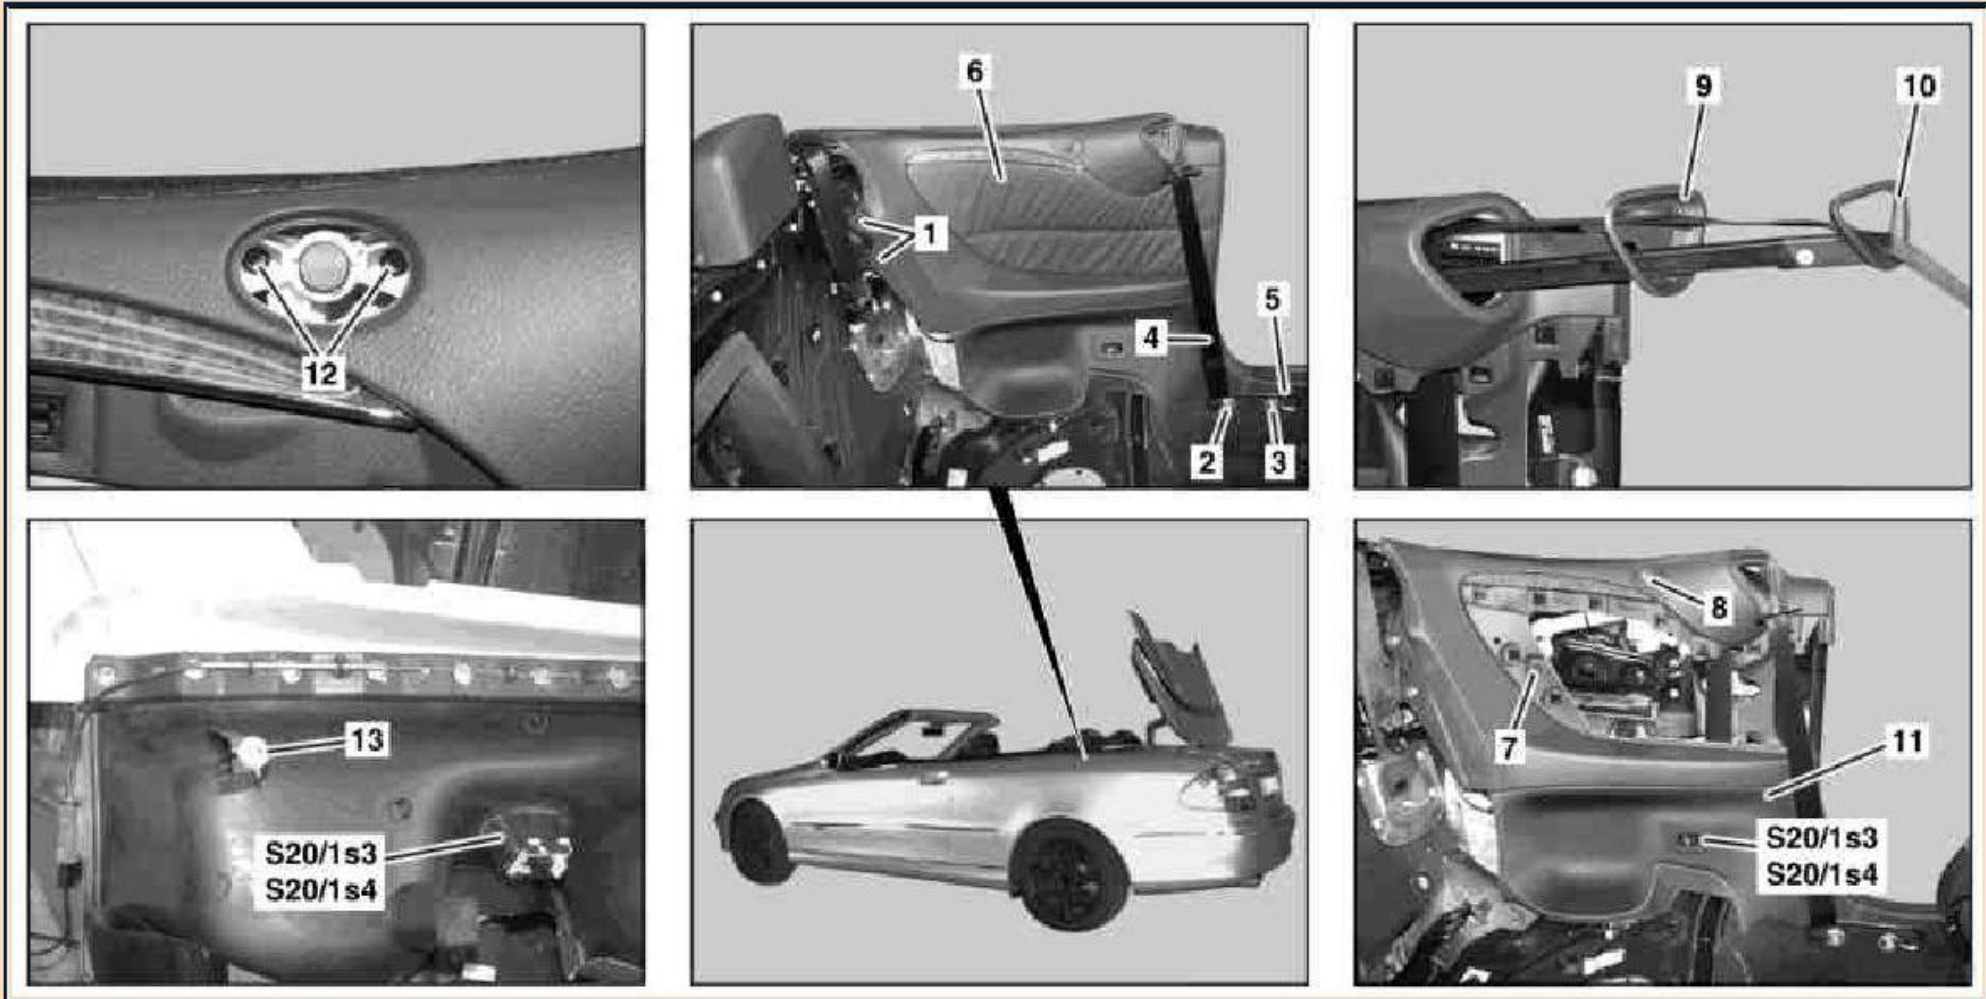

P68 30-2927-09

Add.

Document

What is

Document:

Level:

Menu

Help

Previous

Functions

Functions

new?

1

/

1

2

Screen

Display Document

Sales designation:	Vehicle ident. number:	Engine number:	Automatic transmission:	Gr.:	Entry: Mod.Y.: Op. no.:
CLK 500 Cabriolet	WDB209475*	113.968	722633	**.*	

AR68.30-P-4780QA	Remove/install side paneling in rear	Full-size view	Validity OFF	Page: 3 / 5
------------------	--------------------------------------	----------------	--------------	-------------

P68.30-2927-09

- | | | |
|--------------------|-----------------------|--|
| 1 Bolts | 7 Bolt | 13 Clip retainer |
| 2 Bolt | 8 Cover | |
| 3 Bolt | 9 Rosette | S20/1s3 Left rear power window switch |
| 4 Seat belt | 10 Seat belt extender | S20/1s4 Right rear power window switch |
| 5 Belt end fitting | 11 Side paneling | |
| 6 Trim panel | 12 Bolts | |

Modification notes

22.1.04	Disconnect/connect ground line from battery removed		
---------	---	--	--

	Remove/Install		
1	Remove rear seat and rear backrest		AR91.12-P-1700QA
2	Remove bolts (1)		
3.1	Unscrew bolt (2)	Except USA version code 494a passenger side Nm Bolt on belt end fitting	BA91.40-P-1001-01A
3.2	Remove belt tension sensor (B48/3)	With USA version code 494a passenger side	AR91.40-P-0630Q
4	Loosen bolt (3)	Nm Bolt on belt end fitting	BA91.40-P-1001-01A
5.1	Lift belt end fitting (5) and move out seat	Except USA version code 494a passenger	

Display Document

Sales designation:	Vehicle ident. number:	Engine number:	Automatic transmission:	Gr.:	Entry: Mod.Y.: Op. no.:
CLK 500 Cabriolet	WDB209475*	113.968	722633	68.30	

AR68.30-P-4780QA	Remove/install side paneling in rear	Full-size view	Validity OFF	Page: 4 / 5
------------------	--------------------------------------	----------------	--------------	-------------

No.	Description	Tools	Notes
		side	
4	Loosen bolt (3)	Nm	Bolt on belt end fitting BA91.40-P-1001-01A
5.1	Lift belt end fitting (5) and move out seat belt (4)		Except USA version code 494a passenger side i Installation: Ensure that seat belt (4) is installed properly.
6	Unclip trim panel (6)	S	Long wedge 115589035900
7	Remove bolt (7)		
8	Unclip cover (8) and unscrew bolts (12) below		
9	Pull out seat belt extender (10) and unclip rosette (9)		
10	Move seat belt (4) through seat belt extender (10) and rosette (9).		
11	Remove side paneling (11).		i Installation: Check clip retainers (13) in side paneling (11), replace if necessary.
12	Unplug electrical connector at left rear power window switch (S20/1s3), right rear power window switch (S20/1s4)		
13	Move seat belt (4) through side paneling (11) with rosette (9).		i Installation: Ensure that seat belt (4) is installed properly.
14	Install in the reverse order		
15	Carry out seat belt function check		

Display Document

Sales designation: CLK 500 Cabriolet Vehicle ident. number: WDB209475* Engine number: 113.968 Automatic transmission: 722633 Gr.: 68.30 Entry: Mod.Y.: Op. no.:

AR68.30-P-4780QA

Remove/install side paneling in rear


Full-size view

Validity OFF

Page: 5 / 5

Nm Seat belts/emergency tensioning retractors

Number	Designation	Model
		209.4
BA91.40-P-1001-01A	Belt end fitting bolt	Nm 30

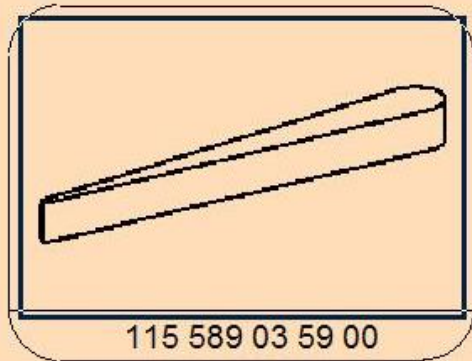

115 589 03 59 00

Long wedge

Add.
Functions

Document
Functions

What is
new?

Document:
1 / 1

Level:
1

Menu

Help

Previous
Screen