
MODEL 209.4

P91.12-2534-03

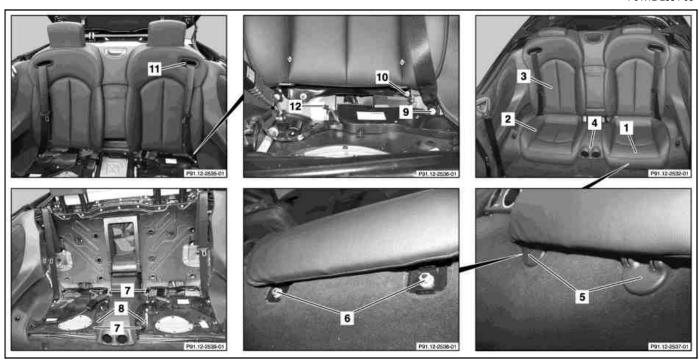

P91.12-2540-09

- 1 Left rear seat cushion
- Right rear seat cushion
- 2 3 Rear seat backrest
- 4 5 Rear center console
- Cover
- 6 Nuts

- 7 Nuts
- Connector 8
- 9 Bolt
- 10 Nut
- Plastic eyelet 11
- 12 Connector

X	Remove/Install		
⚠ Danger!	Injury hazard from rollover bar extending	Manually remove rear head restraints before working in vicinity of roll bar.	AS91.00-Z-0003-01QA
1	Lower convertible top and leave soft top compartment cover open		
2	Move both front seat forward		
3	Remove covers (5)		
4	Unscrew nuts (6) from rear seat cushions (1		

5	Remove rear seat cushions (1 and 2) - pull		
	out to front		
6	Unscrew nuts (7) from rear center console		
	(4)		
7	Detach connector (8) from rear center		
	console (4) and remove		
8	Unscrew screws (9)	Nm Screw on belt end fitting	*BA91.40-P-1001-01A
9	Loosen nuts (10)		
10	Disconnect connector (12)		
10	Disconnect connector (12) Pull rear seat backrest (3) forward and then remove from above, guiding seat belt through plastic eyelet (11)		

$\overline{\text{Nm}}$ Seat belts/emergency tensioning retractors

Number	Designation	Model 209
BA91.40-P-1001-01A	Belt end fitting screw NM	30