

Display Document

Sales designation: CLK 500 Vehicle ident. number: WDB209375* Engine number: 113.968 Automatic transmission: 722633 Gr.: Entry: Mod.Y.: Op. no.:

AR91.10-P-1070P


Remove/install driver's seat cushion

Full-size view

Validity OFF

Page: 2 / 4

MODEL 203, 209

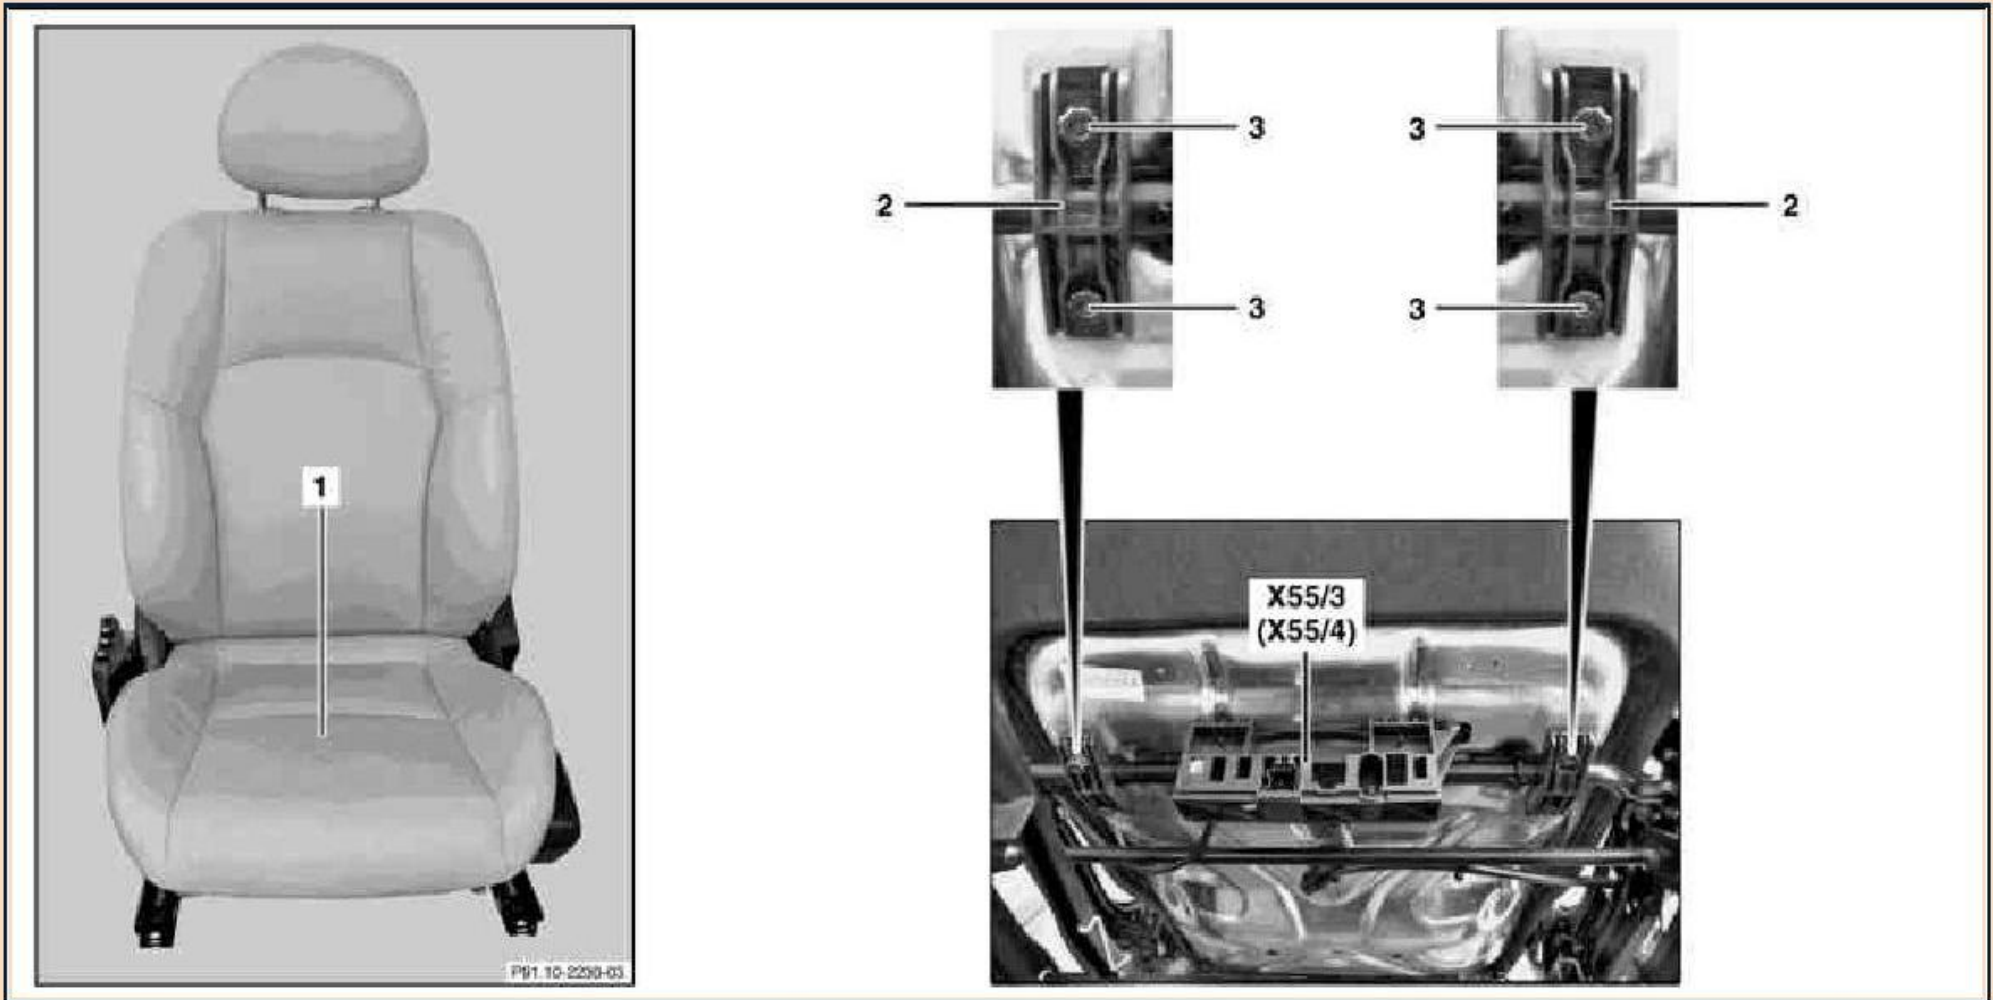

Add.

Document

What is

Document:

Level:

Menu

Help

Previous

Screen

Display Document

Sales designation: CLK 500 Vehicle ident. number: WDB209375* Engine number: 113.968 Automatic transmission: 722633 Gr.: Entry: Mod.Y.: Op. no.:

AR91.10-P-1070P

Remove/install driver's seat cushion

Full-size view

Validity OFF

Page: 3 / 4

P91.10-2238-09

Illustrated on Model 203.0

- 2 Bow
- 3 Spreading pins

- X55/3 Driver seat contacting strip
- X55/4 Passenger seat contacting strip


1 Driver's seat cushion

Shown on Model 203.0

- 1 Driver's seat cushion
- 4 Tie strap
- 5 Pins
- X55/3 Left front seat contacting strip
- X55/4 Right front seat contacting strip



P91.10-2239-11



Remove/Install

Add.
Functions

Document
Functions

What is
new?

Document:
1 / 1

Level:
1

Menu

Help

Previous
Screen

Display Document

Sales designation:	Vehicle ident. number:	Engine number:	Automatic transmission:	Gr.:	Entry: Mod.Y.: Op. no.:
CLK 500	WDB209375*	113.968	722633		

AR91.10-P-1070P	Remove/install driver's seat cushion	Full-size view	Validity OFF	Page: 4 / 4
-----------------	--------------------------------------	----------------	--------------	-------------

P91.10-2239-11

	Remove/Install		
ⓘ	Notes on seat occupied recognition	USA version of models 203, 209 code 494a	AH91.60-P-0760-01P
1	Remove driver's seat	Model 203 Model 209	AR91.10-P-1000P AR91.10-P-1000Q
2	Tip driver's seat up (1)	i in order to reach the expanding pins (3).	
3	Remove expanding pins (3)		
4	Open driver seat contacting strip (X55/3), passenger seat (X55/4)		
5	Unclip all the plugs from the connector block		
6	Unhook the clamps (2)		
7	Unhook pins (5)	i Press driver's seat cushion down.	
8	Cut cable straps (4)		
9	Remove driver's seat cushion (1) toward front.		
10	Install in the reverse order		