








## MODEL 218

- 1 Instrument panel  
 2 Bolts  
 3 Instrument cluster covering  
 4 Pin  
 5 Catch hook  
 6 Bolts  
 7 Electrical connector  
 A1 Instrument cluster

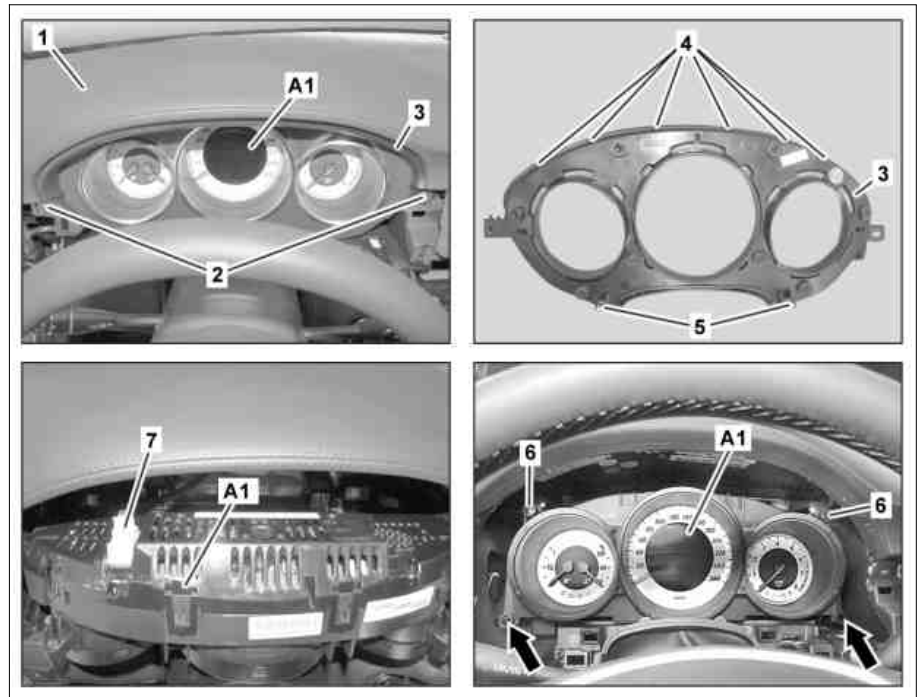

P54.32-8982-06

 	Remove/install		
	Information on preventing damage to electronic components due to electrostatic discharge		AH54.00-P-0001-01A
1	Connect Star Diagnosis and perform initial startup of instrument cluster (A1)	When replacing the instrument cluster (A1).	AD00.00-P-2000-04A
2	Completely move steering wheel down and toward rear.		
3	Switch off ignition and remove transmitter key or KEYLESS-GO start/stop button from electronic ignition lock control unit	 KEYLESS-GO start/stop button only on vehicles with code (889) Keyless-Go.	
4	Remove left and right trim strip from instrument panel (1)		AR68.10-P-1180EL
5	Remove bolts (2)		
6	Unlatch instrument cluster bezel (3) first at the top of the peg (4) then unlatch in the lower area of the catch hooks (5) and remove	 Long wedge	*115589035900
7	Remove bolts (6, arrows)	Rechargeable drill / screwdriver <a href="https://www.gotis.com/G_58.0_01.1">gotis://G_58.0_01.1</a>	
8	Swing the instrument cluster (A1) at the top out of the dashboard (1) and remove rearwards until the electrical connector (7) is accessible		
9	Unplug electrical connector (7) and remove instrument cluster (A1)		
10	Install in the reverse order		



115 589 03 59 00

Long wedge