


MODEL 218.3

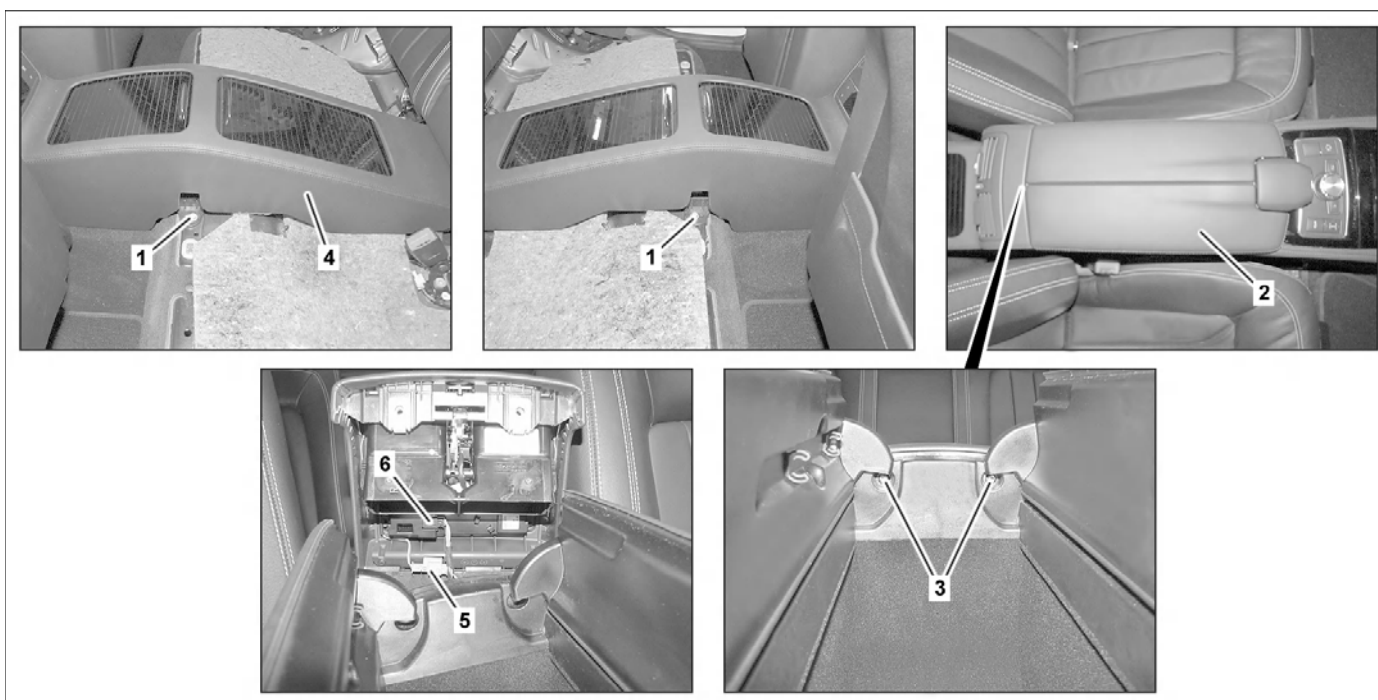

P68.20-4345-09

- 1 Screw
- 2 Stowage compartment
- 3 Bolts
- 4 Rear center console
- 5 Electrical connector
- 6 Electrical connector

| ☒ ☒ | Remove/install | | |
|-----|---|--|------------------|
| 1 | Remove left and right seat cushion in rear | | AR91.12-P-1020EL |
| 2 | Remove bolts (1) | | |
| 3 | Open stowage compartment (2) in front center console | | |
| 4 | Remove screws/bolts (3) | | |
| 5 | Remove 12 V socket | | AR54.10-P-1004EW |
| 6 | Raise rear center console (4) in front area until electrical connectors (5, 6) are accessible | | |
| 7 | Disconnect electrical connectors (5, 6) and remove rear center console (4) from vehicle | | |
| 8 | Install in the reverse order | | |