


MODEL 218

## Modification notes

25.3.14 Operation step sequence revised

Operation steps 2 to 7

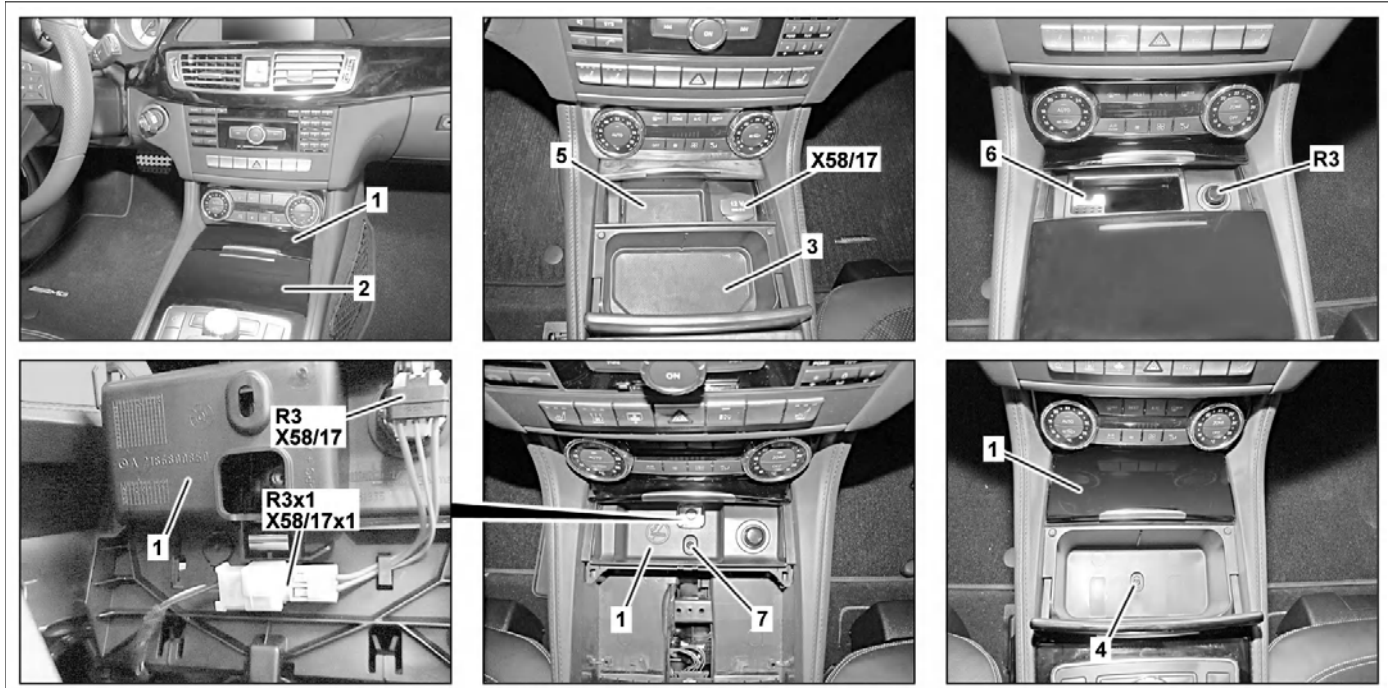

P68.20-4347-09

## Shown on model 218 up to model year 2015

1	Stowage compartment or ashtray housing	5	Trim insert (without CODE 301 (Ashtray package/smoker package))	R3x1	Electrical connector for front cigarette lighter with ashtray illumination (with code 301 (Ashtray package/smoker package))
2	Stowage compartment	6	Ashtray (with CODE 301 (Ashtray package/smoker package))	X58/17	Front vehicle interior socket (except CODE 301 (Ashtray package/smoker package))
3	Trim insert	7	Screw	X58/17x1	Front vehicle interior socket electrical connector (except CODE 301 (Ashtray package/smoker package))
4	Screw	R3	Cigarette lighter with front ashtray illumination (with code 301 (Ashtray package/smoker package))		

<b>i</b>	Information on preventing damage to electronic components due to electrostatic discharge		AH54.00-P-0001-01A
<b>⊠</b> <b>⊠</b>	<b>Remove/install</b>		
1.1	Switch off ignition and remove transmitter key from electronic ignition lock control unit	MODEL 218 without CODE 889 (KEYLESS-GO)	
1.2	Switch off ignition and remove transmitter key or KEYLESS-GO start/stop button from electronic ignition lock control unit	MODEL 218 with CODE 889 (KEYLESS-GO)	
2	Open stowage compartment (2)		
3	Open stowage compartment or ashtray housing (1)		

4.1	Remove trim insert (5)	MODEL 218 without CODE 301 (Ashtray package/smoker package)	
4.2	Remove ashtray (6)	MODEL 218 with CODE 301 (Ashtray package/smoker package)	
5	Unscrew bolt (7)		
6	Remove trim insert (3)		
7	Unscrew bolt (4) and remove stowage compartment (2) from center console		
8	Remove stowage compartment or ashtray housing (1) from center console until electrical connectors on cigarette lighter with front ashtray illumination (R3x1) or electrical connector on front interior compartment socket connector (X5817x1) are accessible		
9	Disconnect electrical connector on cigarette lighter with front ashtray illumination (R3x1) or electrical connector on front interior compartment socket connector (X5817x1) and remove stowage compartment or ashtray housing (1)		
10	Install in the reverse order		