


MODEL 212.0/1
 with CODE 279 (Electronic gear selector)
 with CODE 386 (Comfort telephony)
MODEL 218
 with CODE 386 (Comfort telephony)

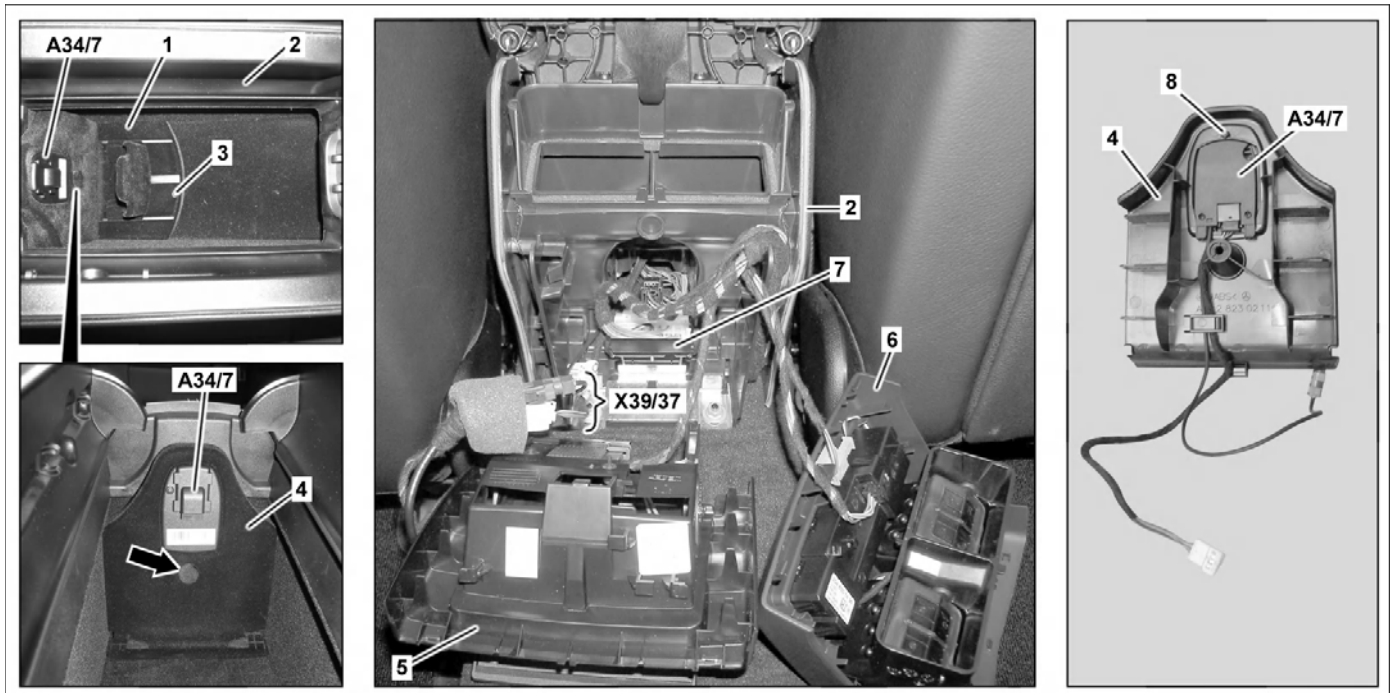

P82.70-6952-09

Shown on model 212.0

- | | | | | | |
|---|------------------------|---|--|--------|-----------------------------------|
| 1 | Bracket | 5 | Stowage compartment (MODEL 212, 218.9) | A34/7 | Bluetooth module |
| 2 | Center console | 6 | Rear air vent (MODEL 212, 218.9) | X39/37 | Mobile phone electrical connector |
| 3 | Screw/bolt (MODEL 212) | 7 | Cover (MODEL 212) | | |
| 4 | Cover | 8 | Screw | | |

ⓘ	Information on preventing damage to electronic components due to electrostatic discharge		AH54.00-P-0001-01A
⊞ ⊞	Remove/install		
1.1	Remove rear air vent (6) from center console (2) and lay down to one side with electrical lines connected	MODEL 212.0/1 with CODE 279 (Electronic gear selector) with CODE 386 (Comfort telephony) MODEL 218.9 with CODE 386 (Comfort telephony) MODEL 212.0/1 with CODE 279 (Electronic gear selector) with CODE 386 (Comfort telephony) MODEL 218.9 with CODE 386 (Comfort telephony)	AR83.10-P-4800CW AR83.10-P-4800EL
1.2	Remove rear center console and place to one side with connected electrical lines	MODEL 218.3 with CODE 386 (Comfort telephony)	AR68.20-P-2020EL
2	Remove stowage compartment (5) from center console (2) and lay down to one side with electrical lines connected	MODEL 212.0/1 with CODE 279 (Electronic gear selector) with CODE 386 (Comfort telephony) MODEL 218.9 with CODE 386 (Comfort telephony) MODEL 212.0/1 with CODE 279 (Electronic gear selector) with CODE 386 (Comfort telephony)	AR68.20-P-2230EW

3	Fold cover (7) up toward rear	MODEL 212.0/1 with CODE 279 (Electronic gear selector) with CODE 386 (Comfort telephony)	
4	Slide back foam rubber jacketing and disconnect mobile phone electrical connector (X39/37)		
5	Unscrew bolt (3)	MODEL 212.0/1 with CODE 279 (Electronic gear selector) with CODE 386 (Comfort telephony)	
6	Remove bracket (1) from center console (2)		
7	Unscrew screw (arrow)		
8	Remove cover (4) with Bluetooth module (A34/7) upwards out of center console (2) while leading electrical wiring harness of Bluetooth module (A34/7) out of center console (2)		
9	Unscrew screw/bolt (8) and remove Bluetooth module (A34/7) with electrical wiring harness from cover (4)		
10	Install in the reverse order		