




# Werkstattinformationssystem Display Document

Sales designation: CLS 500	Vehicle ident. number: WDB219375*	Engine number: 113.967	Automatic transmission: 722901	Gr.:	Entry:	Mod.Y.:	Op. no.:
AR72.10-P-1000TX	Remove/install door lining on front door			Full-size view	Validity OFF	Page:	2 / 8

AR72.10-P-1000TX	Remove/install door lining on front door	13.7.04
------------------	--	---------

MODEL 219.3

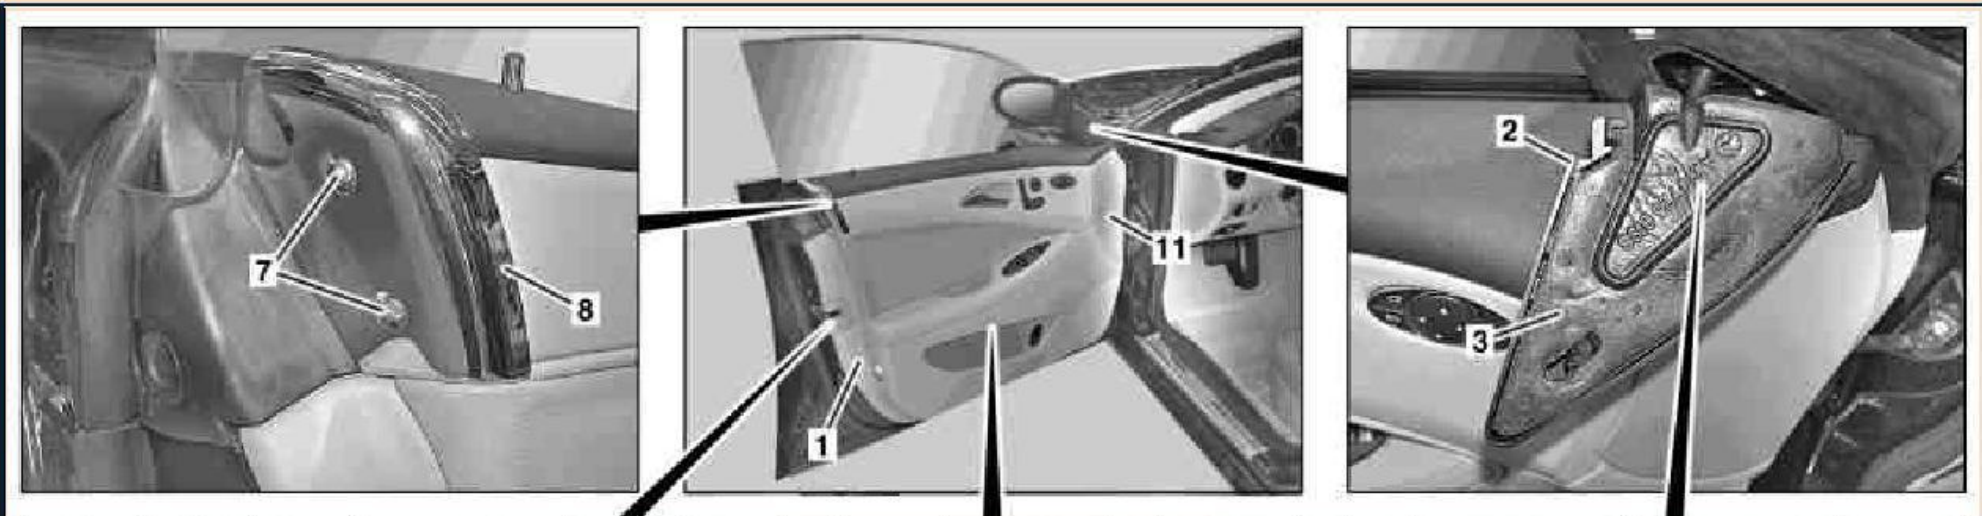



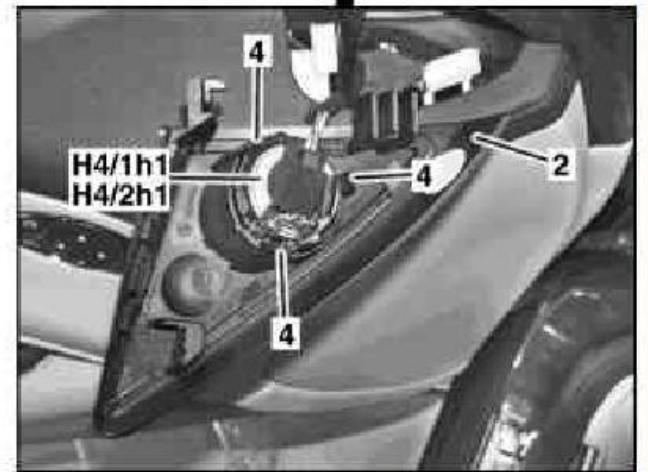
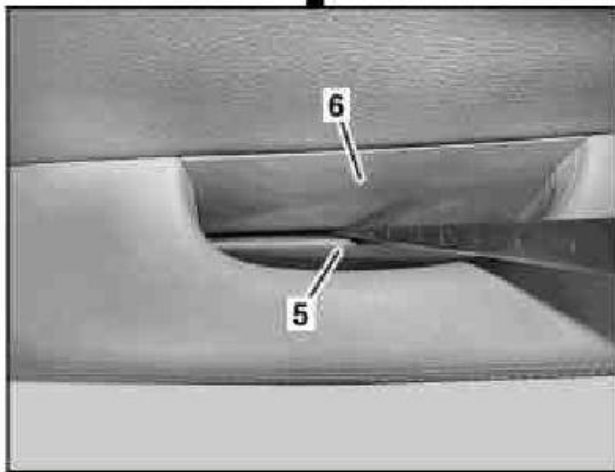


P72.10-3010-09

**Shown on left door lining**



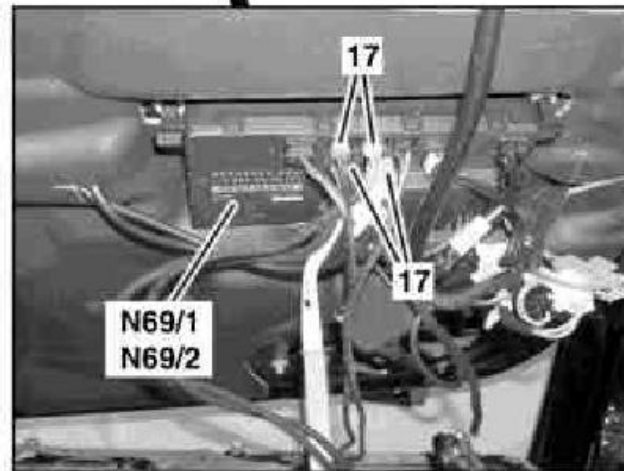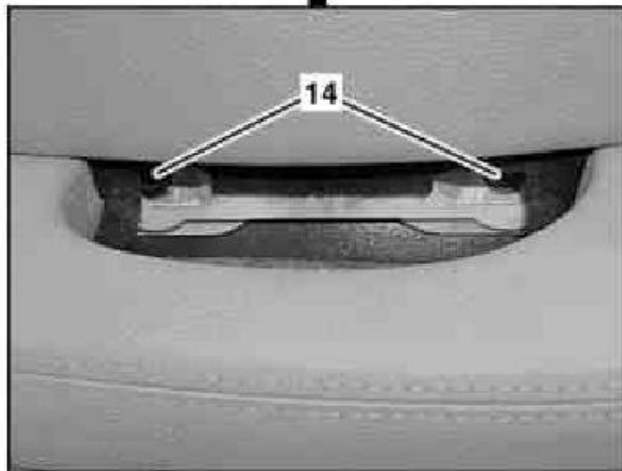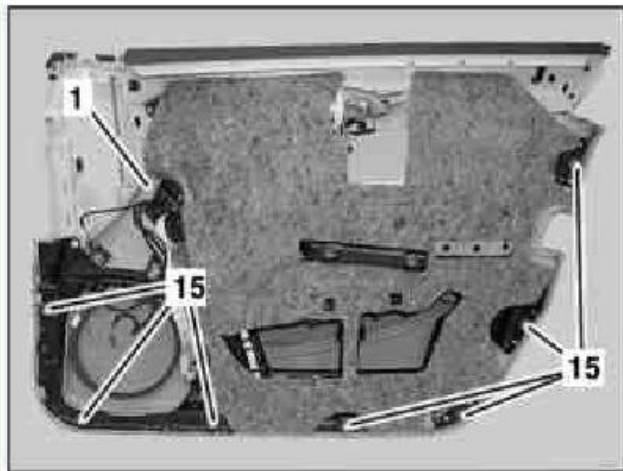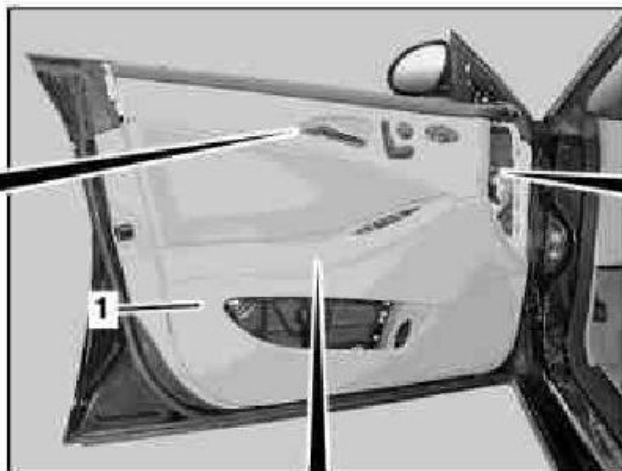


- |   |                       |    |                          |        |         |
|---|-----------------------|----|--------------------------|--------|---------|
| 1 | Door lining           | 6  | Door handle recess cover | 11     | Cover   |
| 2 | Mirror triangle cover | 7  | Screws                   | H4/1h1 | Tweeter |
| 3 | Insulating wedge      | 8  | Trim panel               | H4/2h1 | Tweeter |
| 4 | Latching hook         | 9  | Screw                    |        |         |
| 5 | Power window cover    | 10 | Door lock cover          |        |         |








Shown on left door lining

- 1 Door lining
- 12 Electrical connector
- 13 Latching hook
- 14 Screws
- 15 Mounting clips
- 16 Bowden cable
- 17 Electrical connectors
- N69/1 Left front door control unit
- N69/2 Right front door control unit

 	Removal/installation		
1	Completely open crank window in left or right front door		See Operating Instructions
2	Unclip mirror triangle cover (2) in upper area and remove from door lining (1)		<u>110589035900</u>
3	Remove insulating wedge (3)		
4	Unlock tweeter (H4/1h1) or tweeter (H4/2h1) on latching hook (4) and remove mirror triangle cover (2)		
5	Install long wedge behind power window cover (5) from top, unclip power window cover (5) and remove		<u>115589035900</u>
6	Unclip door handle recess cover (6) in lower area and remove downward		


wis AR72.10-P-1000TX Remove/install door lining on front door Normal view validity OFF Page: 5/ 6

	area and remove downward		
7	Unscrew screws (7) and remove trim panel (8)	<b>i</b> Ensure that trim panel (8) is seated correctly on door lining (1)	
8	Unscrew screw (9) and remove door lock cover (10)		
9	Unclip cover (11) from front and remove		<u>115589035900</u>
10	Unlock electrical connector (12) with suitable screwdriver on latching hook (13) and remove		
11	Remove screws (14)		
12	Press door lining (1) on mounting clips (15) off of inner door panel with mounting wedge	 Move mounting wedge directly to mounting clips (15) and ensure that the retainer tabs on the retainer tabs (15) do not tear out of the door lining (1)  <b>i</b> <b>Installation:</b> Replaced damaged mounting clips (15).	<u>110589035900</u>
13	Tilt door lining (1) upward toward inside until Bowden cable (16) is accessible		
14	Unhook Bowden cable (16) from inner door opener		
15	Disconnect electrical connectors (17) from left front door control unit (N69/1) or right		

Start CLS Rem... wis 10:36


wis AR72.10-P-1000TX Remove/install door lining on front door Normal view validity OFF Page: 6/ 6

14	Unhook Bowden cable (16) from inner door opener		
15	Disconnect electrical connectors (17) from left front door control unit (N69/1) or right front door control unit (N69/2)		
16	Remove door lining (1)		
17	Install in the reverse order		

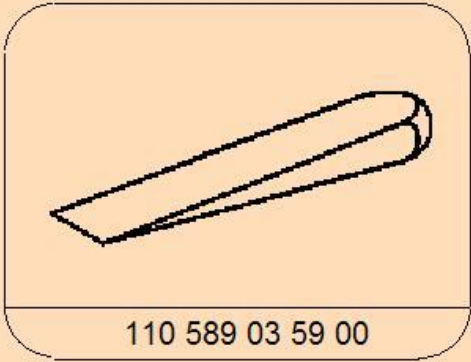

110 589 03 59 00

Mounting wedge

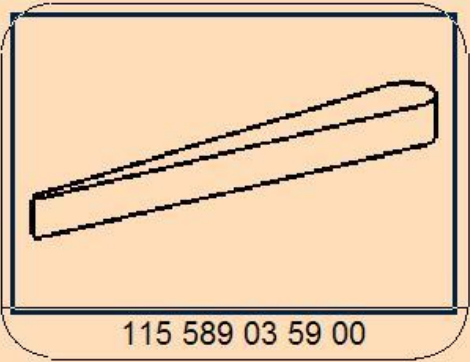

115 589 03 59 00

Long wedge

Start | CLS Rem... | wis | 10:38