


MODEL 219.3

- 1 Rear center section paneling
2 Expansion rivet

E18/5 Left luggage compartment lamp

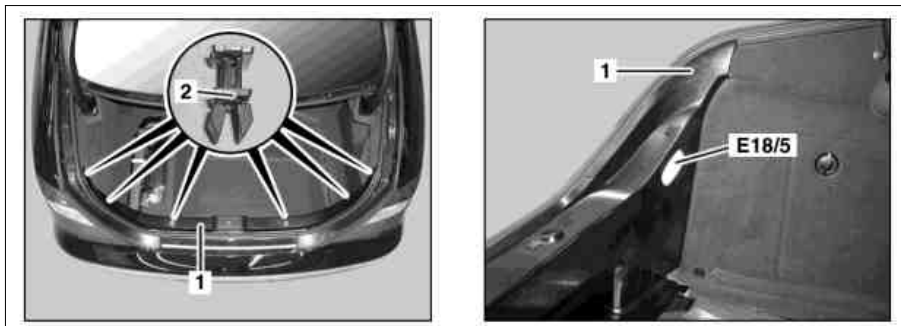

P68.30-3039-04

☒ ☒	Remove/Install		
1	Open trunk lid		
2	Switch off left luggage compartment lamp (E18/5) by locking trunk lid lock with suitable screwdriver	i Installation: Actuate opening handle on outside of trunk lid to unlock trunk lid lock	
3	Remove expansion rivets (2)	i Installation: Check expansion rivets (2) for proper state, replace if necessary	
4	Lift rear center section paneling (1) and tilt toward front		
5	Disconnect electrical connector from left luggage compartment lamp (E18/5)		
6	Remove rear center section paneling (1) from trunk		
7	Install in the reverse order		