



MODEL 219.3 up to 13.8.07

- 1 Head rest guide
- 2 Catch hook
- 3 Front seat

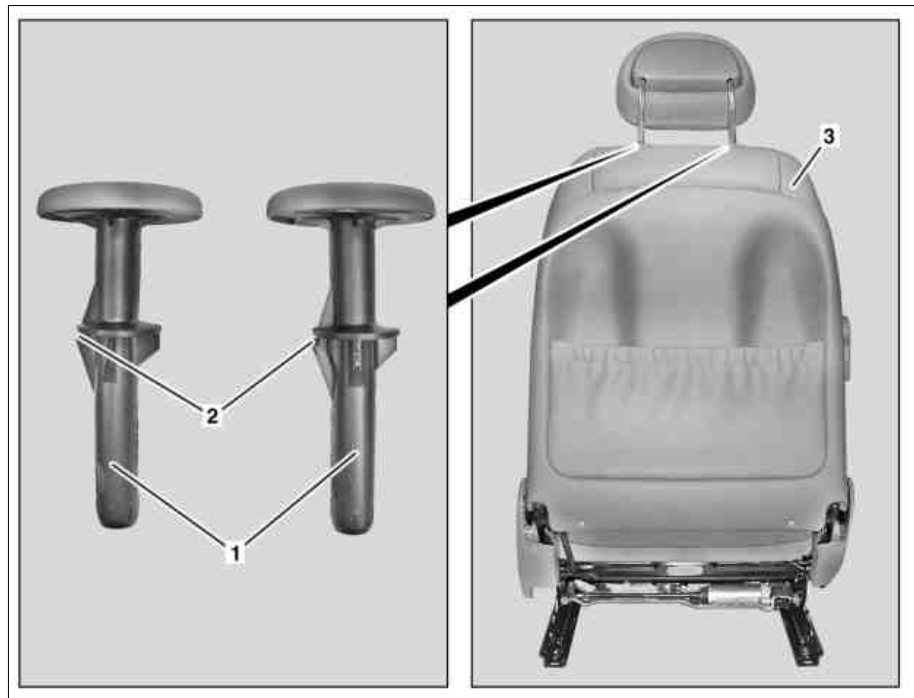

P91.16-2278-06

☒ ☒	Remove/install		
1	Remove head restraint on left or right front seat (1)		AR91.16-P-0040TX
2	Release catch hooks (2) using pulling hooks and remove head restraint guide (1)	ⓘ Catch hooks (2) located on left side. Ⓞ	*140589023300
3	Install in the reverse order		



140 589 02 33 00

Pulling hook