



Model 172.4
 Model 190
 except code 244 (Sport seats, front)
 except code 555 (AMG Performance seats)

- 1 Seat
- 2 Seat backrest
- 3 Screws
- 4 Seat-back lining
- 5 Catch hook
- 6 Retaining tabs

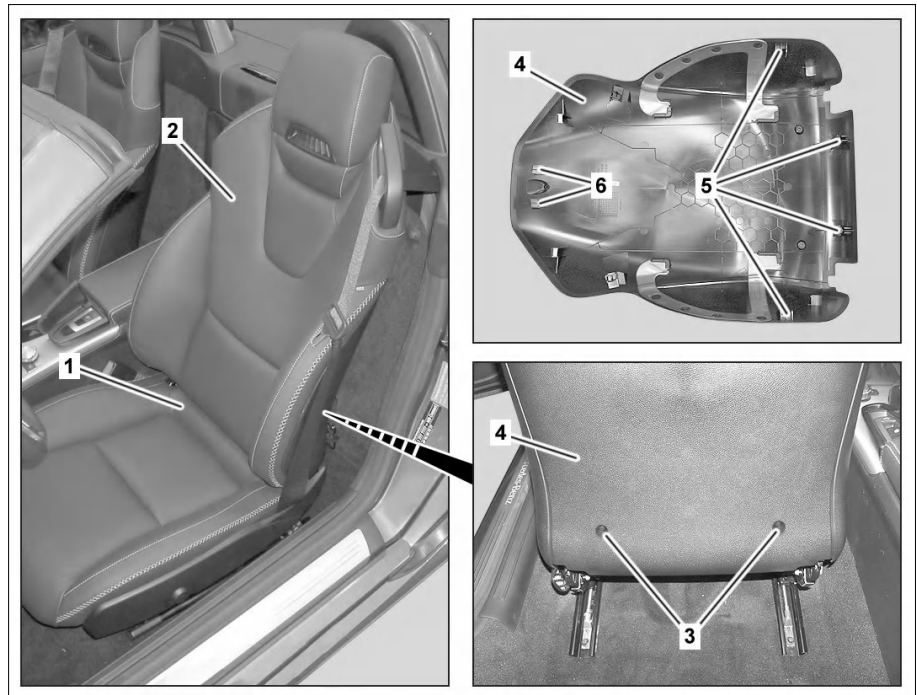

P91.10-4051-06

Warning	Risk of injury. Moving parts can pinch, crush or, in extreme cases even sever extremities.	No parts of the body or limbs should be within the operating area of mechanical components when moving components.	AS00.00-Z-0009-01A
Caution	Risk of injury caused by backrest suddenly folding forward if release lever is accidentally operated during inspection and repair work	When working on the seat, be careful not to accidentally release the backrest mechanism, allowing the seat to fold forward. Keep body parts clear of the backrest travel area. Model 172.4	AS91.00-Z-0005-01V
	Remove/install		
1	Open the Vario roof or soft top completely	Model 172.4 Model 190.4 except code 244 (Sport seats, front) except code 555 (AMG Performance seats)	
2	Move the left and right seat (1) forward		
3	Move the left or right seat backrest (2) forward		
4	Remove screws (3)		
5	Unclip the seat-back lining (4) from the catch hooks (5)	Mounting wedge	*110589035900
6	Slide the seat-back lining (4) on the retaining tabs (6) downward out of the seat backrest frame and remove it		
7	Install in the reverse order		



110 589 03 59 00

Mounting wedge