
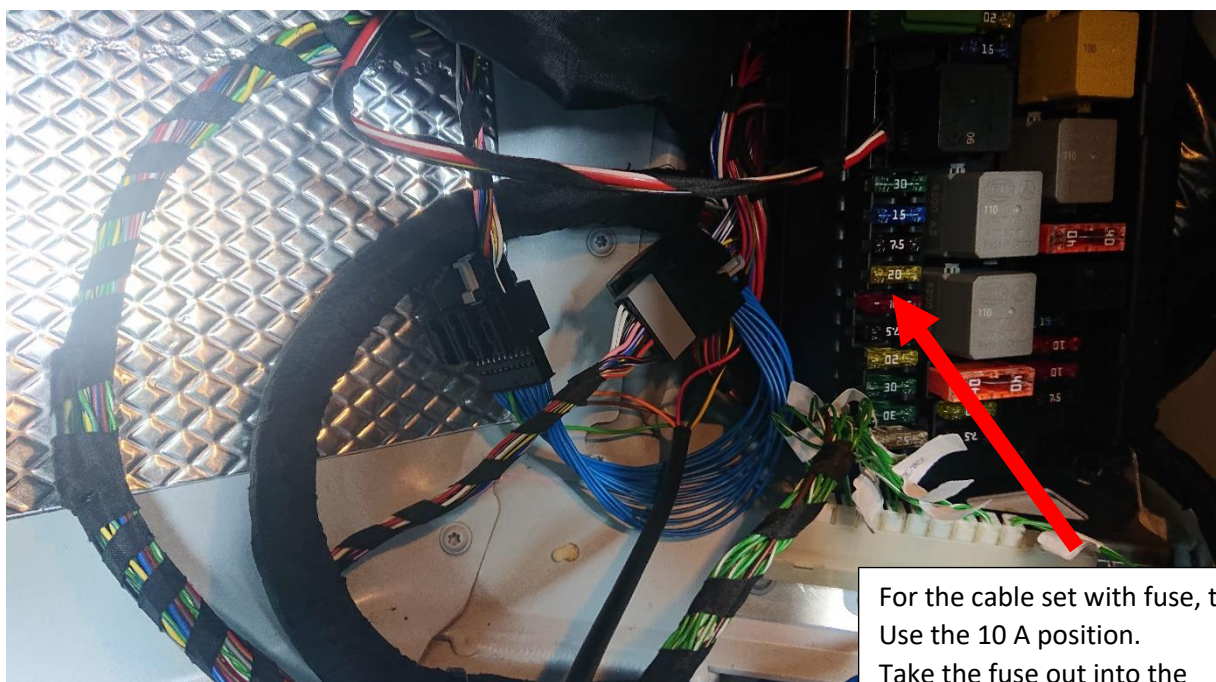


Installation instructions AMG GT / GTS / GTC / GTR

Switch off the ignition and let the car stand for at least 10 minutes or disconnect the battery

Remove front passenger footwell trim (3x SW 10)

Passenger footwell disassemble fairing (3x hexagon SW 10)

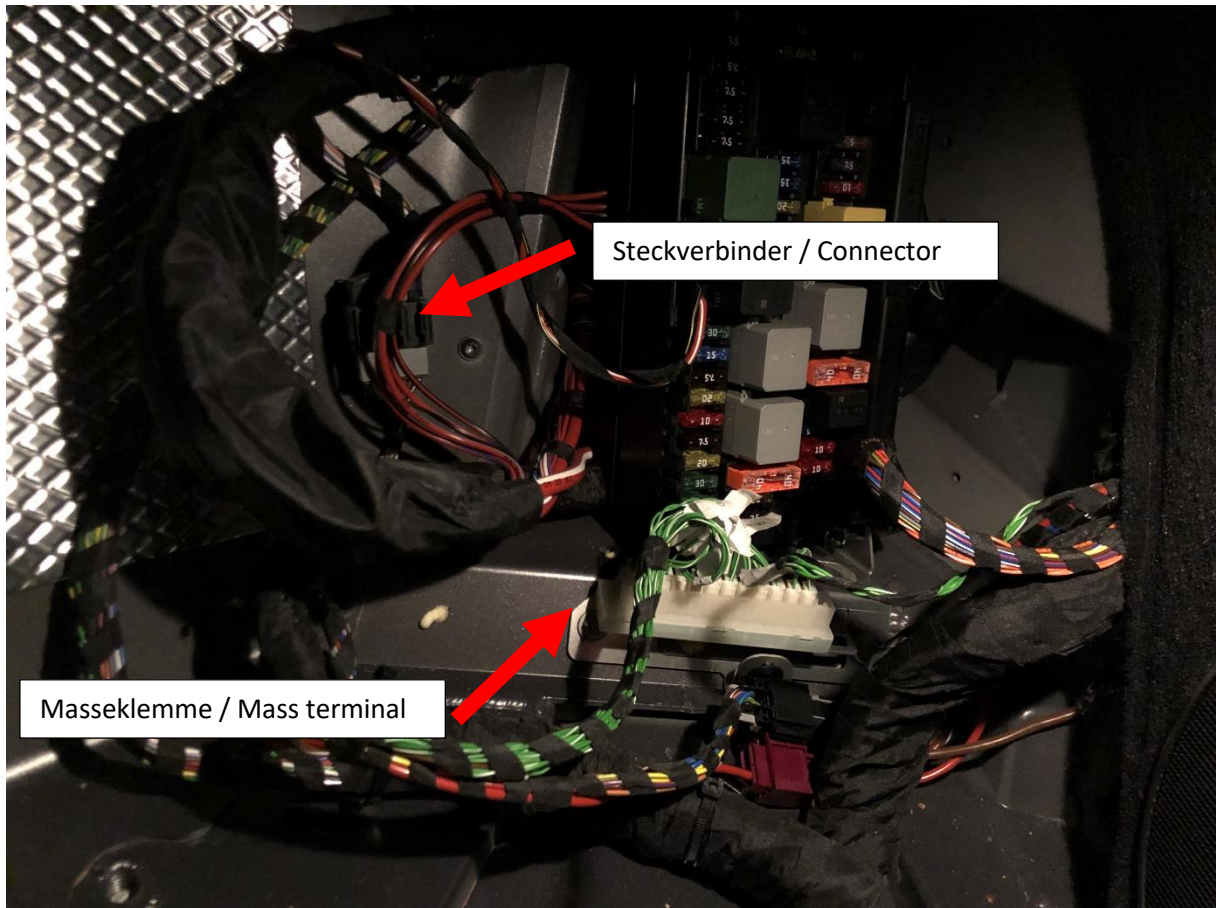

For the cable set with fuse, the
Use the 10 A position.
Take the fuse out into the
Put adapter and then the
Adapter to the position of 10 A.
Fuse.