
AR91.12-P-1710ECRemove/install rear seat backrest side bolsterMODEL 204.3 except CODE (P98) Black SeriesMODEL 204.3 with CODE (224) Design individual seats in rearMODEL 207.3

Shown on left side of vehicle on model

207.3

- 1 Side bolster
- 2 Rear seat cushion
- 3 Seat belt
- 4 Retaining clip
- 5 Bracket
- 6 Screw

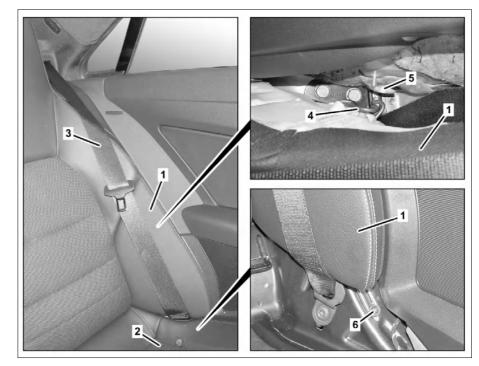

P91.12-3451-06

X	Remove/install	
1	Remove rear seat cushion (2)	AR91.12-P-1020EC
2	Remove bolt (6)	
3	Pull seat belt (3) to one side	
4	Lift side bolster (1) on retaining bracket (4) upwards from holder (5) and remove side bolster (1)	
5	Install in the reverse order	