


MODEL 204.3 except CODE (P98) Black Series

MODEL 204.3 with CODE (224) Design individual seats in rear

MODEL 207

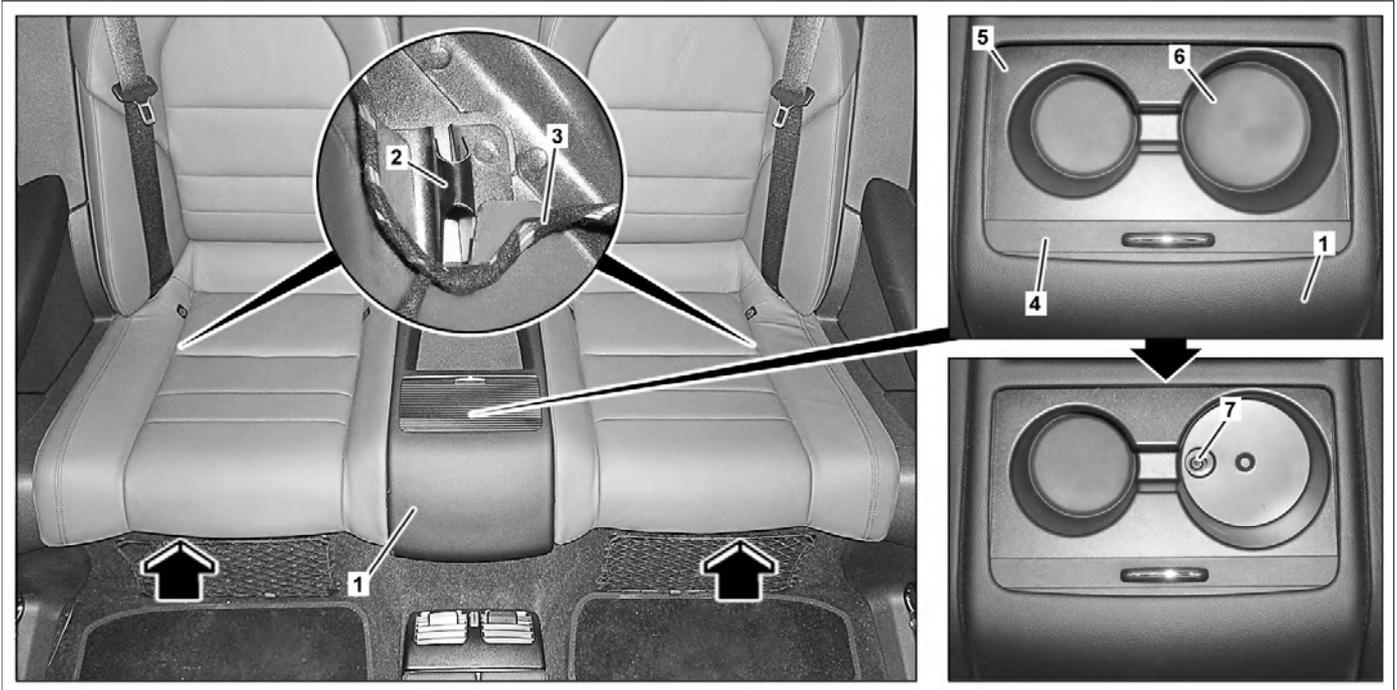

P91.12-3454-09

Shown on model 207.3


- 1 Rear seat cushion
- 2 Support

- 3 Wiring harness
- 4 Cover

- 5 Stowage compartment
- 6 Rubber pad
- 7 Screw

Shown on model 204.3, left side of vehicle

- 2 Support
- 3 Wiring harness
- 8 Adhesive strips

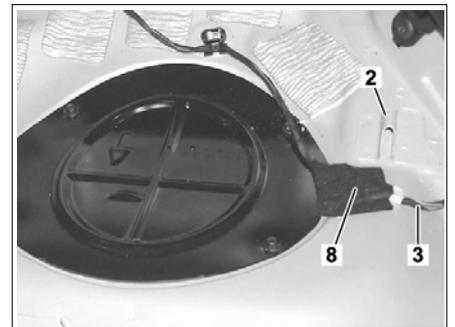

P91.12-3570-01

| ☒ ☒ | Remove/install | | |
|-----|--|---|--|
| 1 | Move both front seats forward | | |
| 2 | Open cover (4) of stowage compartment (5) | | |
| 3 | Remove rubber mounting (6) | | |
| 4 | Unscrew bolt (7) | | |
| 5 | Lift rear seat cushion (1) at front and remove in direction of the arrow | <p>i Installation: In model 204.3, 207.3: Ensure that retaining brackets at bottom of rear seat cushion (1) are seated correctly in mounts (2) and pay attention to routing and attachment of electrical wiring harness (3) in front of mounts (2). Otherwise electrical wiring harness (3) will be damaged and must be replaced or repaired.</p> | |
| 6 | Install in the reverse order | | |