


MODEL 207

MODEL 212 (except 212.077 /277)

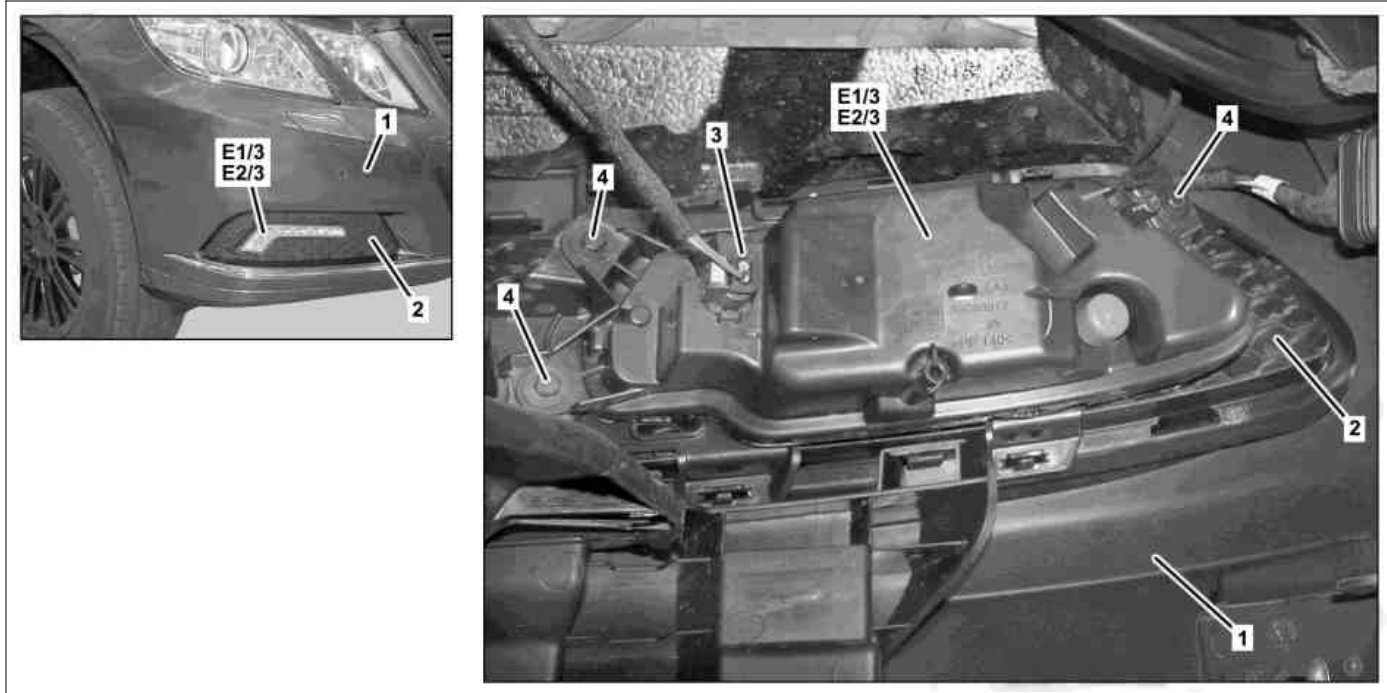


P82.10-5780-09

Shown on right side of vehicle on model 212 with code (615) Bi-xenon headlamp unit with integrated curve illumination or with code (616) Bi-xenon headlamp unit with integrated asymmetric curve illumination or with code (621) Intelligent Light System (left-hand traffic) or with code (622) Intelligent Light System (right-hand traffic)

- 1 Bumper
- 2 Cover
- 3 Electrical connector
- 4 Screw

- E1/3 Left daytime running lamps headlamp
- E2/3 Right daytime running lamps headlamp


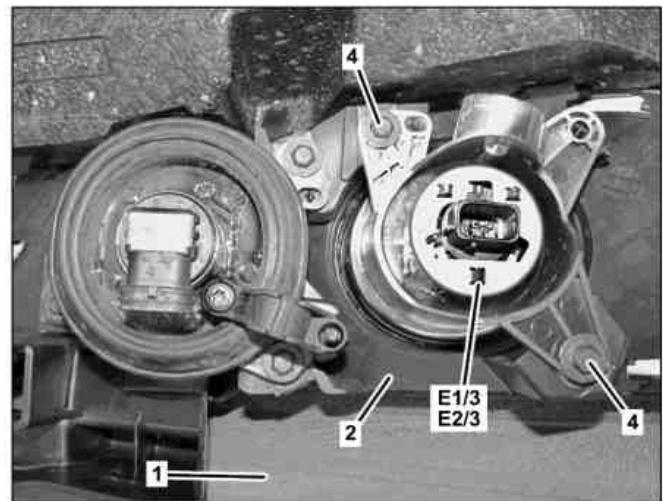




P82.10-5888-08

Shown on right side of vehicle on model 212 without code (615) Bi-xenon headlamp unit with integrated curve illumination or without code (616) Bi-xenon headlamp unit with integrated asymmetric curve illumination or without code (621) Intelligent Light System (left-hand traffic) or without code (622) Intelligent Light System (right-hand traffic)

- 1 Bumper
- 2 Cover
- 4 Screw

- E1/3 Left daytime running lamps headlamp
- E2/3 Right daytime running lamps headlamp

☒ ☒	Remove/install		
<b>⚠ Danger!</b>  1	<b>Risk of death</b> caused by vehicle slipping or toppling off of the lifting platform.  Raise vehicle with vehicle lift	Align vehicle between columns of vehicle lift and position four support plates at vehicle lift support points specified by vehicle manufacturer.	<b>AS00.00-Z-0010-01A</b>
2	Loosen left and right inner fender in area of bumper (1) and lift out with assembly wedge until the left daytime running light headlamp (E1/3) or right daytime running light headlamp (E2/3) can be removed.		<b>*110589035900</b>
3	Disconnect electrical connector (3)		
4	Unscrew bolts (4) and remove left daytime running light headlamp (E1/3) or right daytime running light headlamp (E2/3) from cover (2) on bumper (1)	 The number of bolts (4) differs according to the vehicle equipment.   <b>Installation:</b> Ensure that left daytime running lamp headlamp (E1/3) or right daytime running light headlamp (E2/3) is seated correctly in cover (2).	
5	Install in the reverse order		



110 589 03 59 00

Mounting wedge