


MODEL 204.3, 207.3, 212.0/1/2
with CODE 413 (Panoramic glass roof with top sliding roof)

Shown on model 212.0

- 1 Headliner
- 2 Bolts
- 3 Electrical connector
- A98 Panoramic sliding roof control module

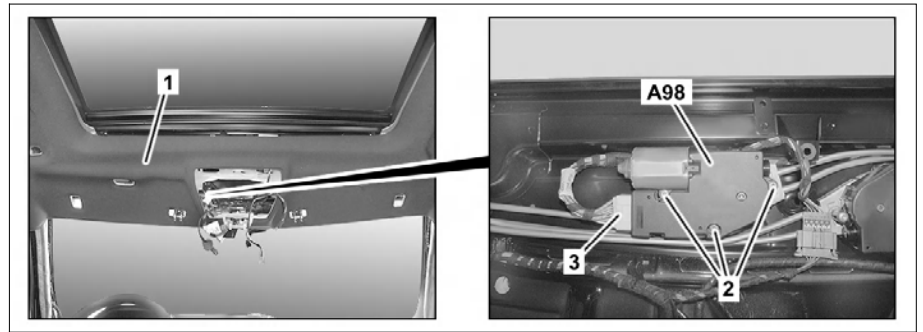

P77.21-2263-04

⚠	Information on preventing damage to electronic components due to electrostatic discharge		AH54.00-P-0001-01A
🔧 🔧	Remove/install		
1.1	Loosen headliner (1) in front area	MODEL 204.3, 207.3 with CODE 413 (Panoramic glass roof with top sliding roof)	AR68.30-P-4300EC
1.2	Loosen headliner (1) in front area up to B-pillars	MODEL 212 with CODE 413 (Panoramic glass roof with top sliding roof) MODEL 212.0/1 with CODE 413 (Panoramic glass roof with top sliding roof)	AR68.30-P-4300EW
2	Lower headliner (1) and disconnect electrical connector (3) on panoramic sliding sunroof control module (A98)	⚠ Carefully lower headliner (1). Headliner (1) can be damaged.	
3	Lower headliner (1), remove bolts (2) and take out panoramic sliding sunroof control module (A98)	⚠ Carefully lower headliner (1). Headliner (1) can be damaged. i Installation: First position bolts (2) and then tighten.	
4	Install in the reverse order		
5	Perform teach-in run for anti-pinch protection and normalization of panoramic sliding sunroof Connect STAR DIAGNOSIS and read out fault memory		AD00.00-P-2000-04A