


MODEL 207.4 with CODE (288) Draft stop for convertible Fondsitzeanlage

- 1 Draft stop
- 2 Screw
- 3 Catch hook

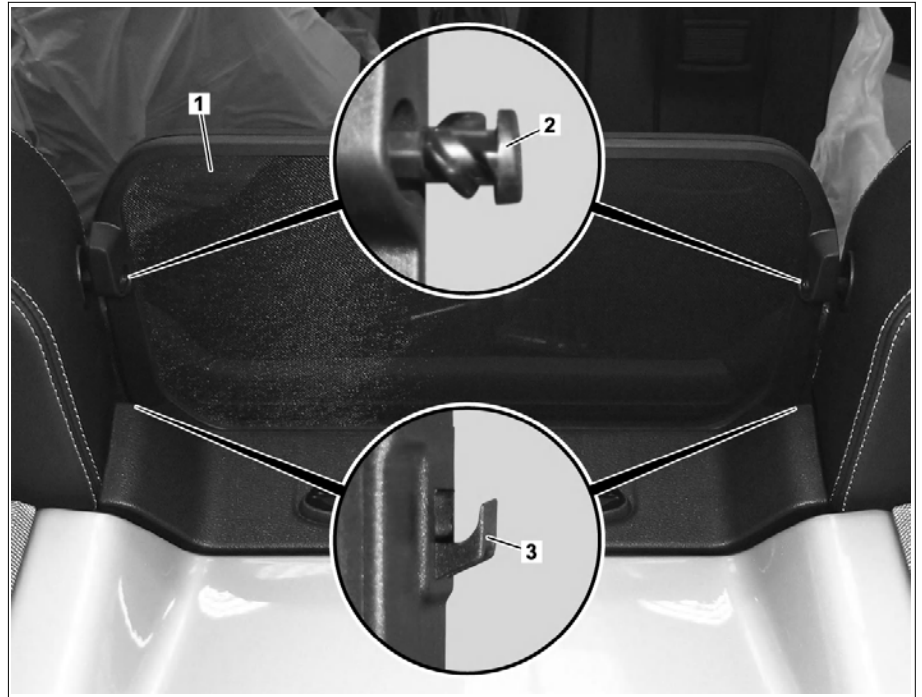

P77.25-2039-06

☒ ☒	Remove/install		
	Risk of injury caused by moving parts that can pinch, crush or, in extreme cases, even sever extremities	No parts of the body or limbs should be within the operating range of the mechanism when moving components.	AS00.00-Z-0009-01A
1	Open soft top		
2	Completely extend head restraints		
3	Carefully loosen bolt (2) from draft stop (1)	<p>⚠ Danger of damaging plastic material of bolt head. Ensure that screwdriver is seated correctly.</p> <p>i Bolt (2) remains in draft stop.</p>	
4	Carefully and lightly bend draft stop (1) toward front to unhook catch hook (3) in area of upper rear wall	⚠ Danger of damaging draft stop.	
5	Carefully pull out draft stop (1) upward	i Installation: Ensure that the teeth on the draft stop (1) are positioned parallel in the guide rail.	
6	Install in the reverse order		