


MODEL 211.0 /2 /6 with CODE (581b) Convenience automatic air conditioning

- 1 Electrical connector
- 2 Bolts
- 3 Sensor surface




B31 C-AAC [K-KLA] multifunction sensor

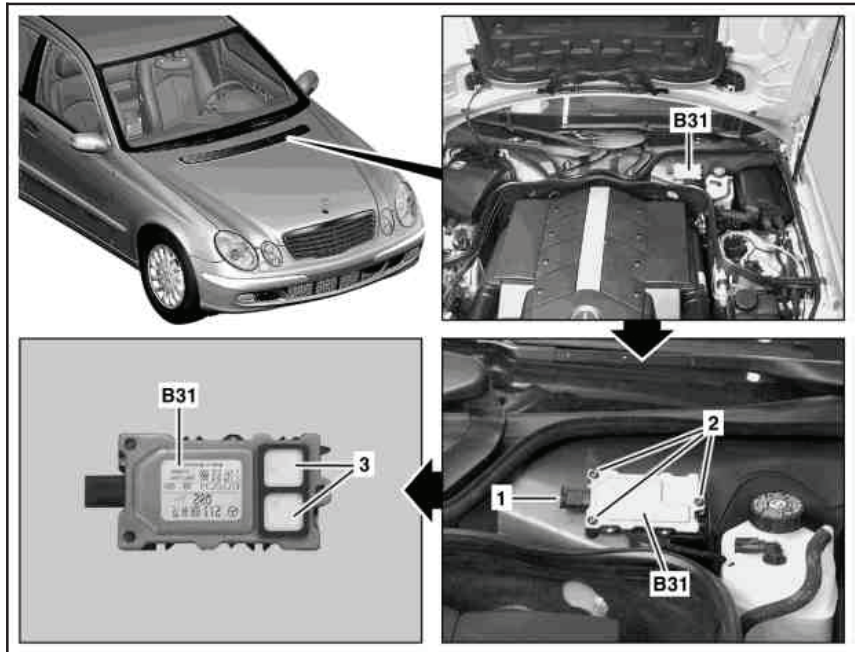

P83.40-2388-06

Modification notes

15.1.04	Disconnect ground cable on battery, connect		
---------	---	--	--

 	Remove/Install		
1	Open engine hood and raise to vertical position		AR88.40-P-1000T
2	Disconnect electrical connector (1) from C-AAC multifunction sensor (B31)		
3	Unscrew bolts (2)		
4	Remove C-AAC multifunction sensor (B31) from water collector	 Installation: The sensor surfaces (3) must point toward the water collector. Ensure that the electrical line is correctly routed.	
5	Install in the reverse order		