


MODEL 211.0 /2 (except 211.08 /09 /28 /29) except CODE (489) Airmatic (semi-active air suspension)

**MODEL 230
except CODE (487) Active Body Control (ABC)
except CODE (P99) Special model "AMG Black Series"**


MODEL 211.6

Shown on model 211

- 1 Nut
- 7 Suspension strut
- 17 Spring control arm

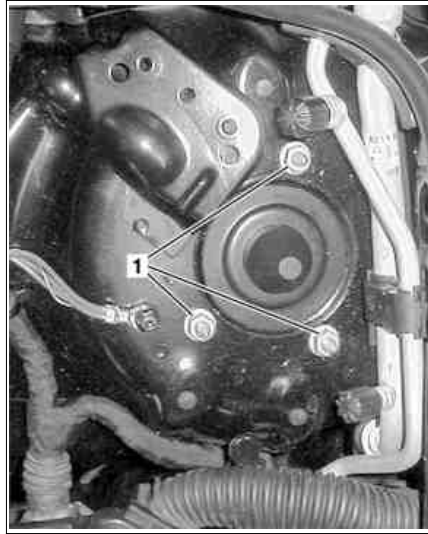

P32.25-2058-02

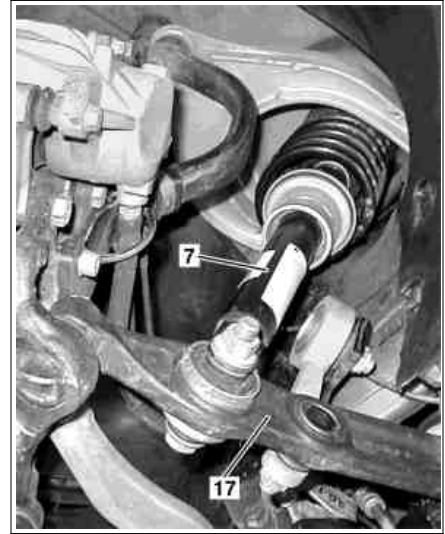

P32.25-2060-02

Modification notes

18.3.08	Value changed: Nut, front suspension strut to front end	Model 211 steel suspension	*BA32.25-P-1001-04B
---------	---	----------------------------	---------------------

	Remove/install		
	Danger!	Risk of injury caused by moving parts that can pinch, crush or, in extreme cases, even sever extremities	No parts of the body or limbs should be within the operating range of the mechanism when moving components.
		Notes on self-locking nuts and bolts	AH00.00-N-0001-01A
		When working on the front-end assembly, be careful not to scratch, mark or notch the surfaces of aluminum parts. Otherwise the service life of the parts will be affected	
	Installation	Only tighten nuts and bolts of chassis components when vehicle is in a ready-to-drive condition.	
1	Position wheels straight ahead		
2	Remove front wheel Remove/install wheels		AP40.10-P-4050Z
3	Unscrew nuts (1).		*BA32.25-P-1001-04B
4	Detach suspension strut (7) from spring control arm (17)	Model 211 Model 230	*BA32.25-P-1002-04B *BA32.25-P-1007-04B
5	Press spring control arm (17) downwards and remove spring strut (7) towards the rear		
6	Install in the reverse order		
7	Check headlamp adjustment and correct if necessary Check and correct the adjustment of the headlamps	After installing new parts Model 211 Model 230	AP82.10-P-8260T AP82.10-P-8260R

Suspension struts

Number	Designation	Model 211 steel suspension	Model 230 except code P99

BA32.25-P-1001-04B	Nut, front suspension strut to front end	Nm	30	20
BA32.25-P-1002-04B	Bolt, front suspension strut to spring control arm	Nm	165	-
BA32.25-P-1007-04B	Nut, front suspension strut to spring control arm	Nm	-	110