

P72.12-2192-08


Shown on left rear door, model 211.0

- 1 Door foil
- 2 Bowden cable
- 3 Electrical connector

- 4 Inner door panel
- H4/5 Left rear door speaker
- H4/6 Right rear door speaker


Rear view of door foil


- 1 Door foil
- 5 Butyl cord

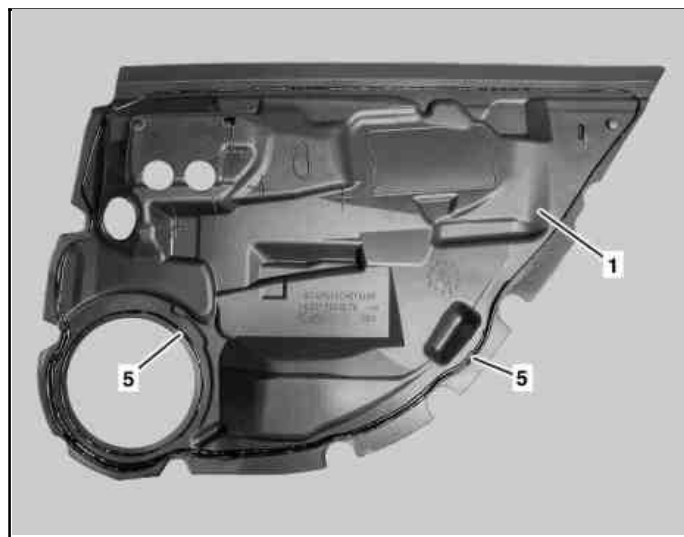

P72.12-2210-11

☒	Remove		
1	Remove rear door control unit		AR72.29-P-1100T
2	Separate electrical connector (3)		
3	Separate butyl cord (5) from inner door panel (4) and left rear door speaker (H4/5) or right rear door speaker (H4/6) with suitable tool.	<ul style="list-style-type: none"> ⚠ Avoid damaging paintwork on inner door panel, otherwise there is a risk of rusting. ℹ Door foil (1) may also be partially released in order to gain access to the components underneath. 	
4	Remove Bowden cable (2) and electric lines through door foil (1) and remove door foil.		
☒	Install		
5	Check door foil (1) and replace if damaged	<ul style="list-style-type: none"> ℹ When replacing the door foil (1), remove residue of butyl cord on inner door panel (4) and clean the adhesive surfaces on the inner door panel (4) and on the left rear door speaker (H4/5) or right rear door speaker (H4/6). Cleaner	*BR00.45-Z-1025-04A

6	Check butyl cord (5) and replace if damaged	<p>i If the butyl cord is partially damaged (5) replace only the damaged section of the butyl cord (5). Route new butyl cord (5) parallel to damaged butyl cord (5) on door foil (1) Remove residue of butyl cord on inner door panel (4) and clean adhesive surfaces on inner door panel (4) and on left rear door speaker (H4/5) or right rear door speaker (H4/6). Sealing cord Cleaner</p>	<p>*BR00.45-Z-1086-01A *BR00.45-Z-1025-04A</p>
7	Route control cable (2) and electrical lines through corresponding cutouts in door foil (1)	<p>i When replacing door foil (1) separate at perforations.</p>	
8	Attach door foil (1) to inner door panel (4) and left rear door speaker (H4/5) or right rear door speaker (H4/6) and roll on	<p>i Ensure that the door foil (1) is exactly matched up on the inner door panel (4). The holes in the inner door panel (4) for the mounting clips on the door lining must not be concealed.</p> <p></p>	<p>*168589056300</p>
9	Connect electrical connector (3)		
10	Install rear door control unit		AR72.29-P-1100T

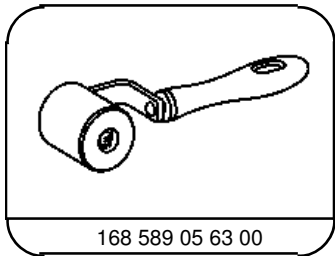

168 589 05 63 00

Roller

Repair materials

Number	Designation	Order number
BR00.45-Z-1086-01A	Sealing cord	A 005 989 12 71 10
BR00.45-Z-1025-04A	Cleaner	A 005 989 19 71