

MODEL 211.0 as of 1.6.06 except CODE (413) Panoramic sliding roof

**MODEL 211.0 as of 1.6.06
with CODE (494) USA version
with CODE (413) Panoramic sliding roof**

MODEL 211.2 as of 1.6.06


MODEL 219.3 as of 1.6.06

**Shown on model 211.0 with code (414)
Power glass tilting/sliding roof and code
(527) COMAND APS (with navigation)**

1 adhesive strip
(with model 211.0 and model
219.3)

2 Antenna cables

A2/49 Roof antenna

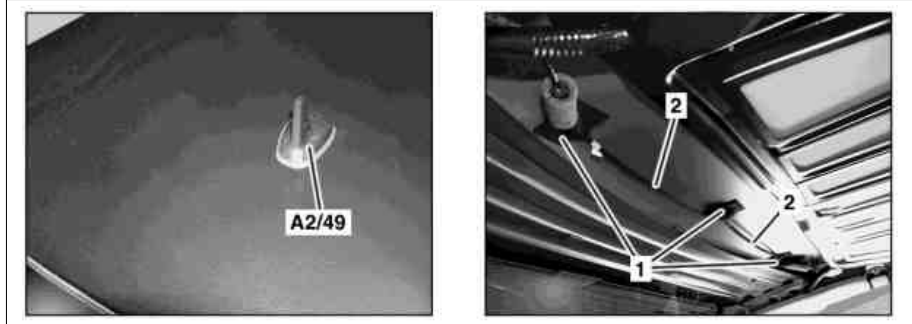

P82.70-6348-04

		Remove/install	
ⓘ		Information on preventing damage to electronic components due to electrostatic discharge	AH54.00-P-0001-01A
1		Lower rear head restraints	
2.1		Detach headliner from roof paneling and, with electrical wiring harness connected, place down on the seats as far forward as possible	Model 211.0 with code (414) Power glass tilting/sliding sunroof. AR68.30-P-4300TA Model 211.0 without code (414) Power glass tilting/sliding roof or without code (413) Panoramic sliding roof AR68.30-P-4300T Model 211.2 AR68.30-P-4300TD Model 219.3 AR68.30-P-4300TY
2.2		Detach headliner at the rear and carefully pull down until roof antenna (A2/49) is accessible	AR68.30-P-4300TB
3		Expose antenna lines (2) and disconnect electrical connectors of antenna lines (2)	ⓘ Quantity and type of fastening of antenna lines (2) can differ depending on model and vehicle equipment. ⓘ Installation: Observe color coding of electrical connectors.
4		Detach roof antenna (A2/49) from roof	ⓘ The roof antenna (A2/49) must not be dismantled, since this will damage the roof antenna (A2/49). ⓘ Installation: Check seal of roof antenna (A2/49), replace if necessary and clean sealing surfaces. ⓘ Nm *BA82.62-P-1001-01A
5		Install in the reverse order	

Nm Antenna

Number	Designation		Model 211	Model 219
BA82.62-P-1001-01A	Bolt/nut of antenna base to vehicle roof	Nm	3	3