



Shown on model 211.0

- 1 Outer sealing rail
- 2 Trim strip
- 3 Retaining clip
- 4 Rear door

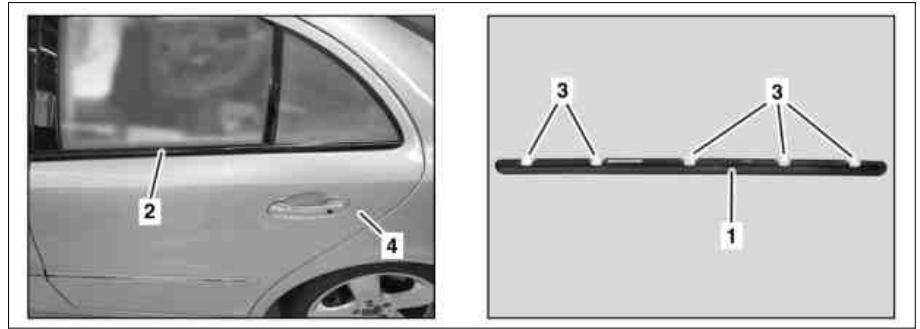

P72.12-2200-04

	Remove/Install		
1	Completely open crank window in rear door		
2	Press trim strip (2) off of outer sealing rail (1) with mounting wedge and remove	Carefully press on trim strip (2) to prevent damaging paint 	*110589035900
3	Unclip outer sealing rail (1) on retaining clips (3) from rear door (4) with mounting wedge and remove	Carefully unclip outer sealing rail (1) to prevent damaging paint Installation: Replace damaged retaining clip (3).	*110589035900
4	Install in the reverse order		



110 589 03 59 00

Mounting wedge