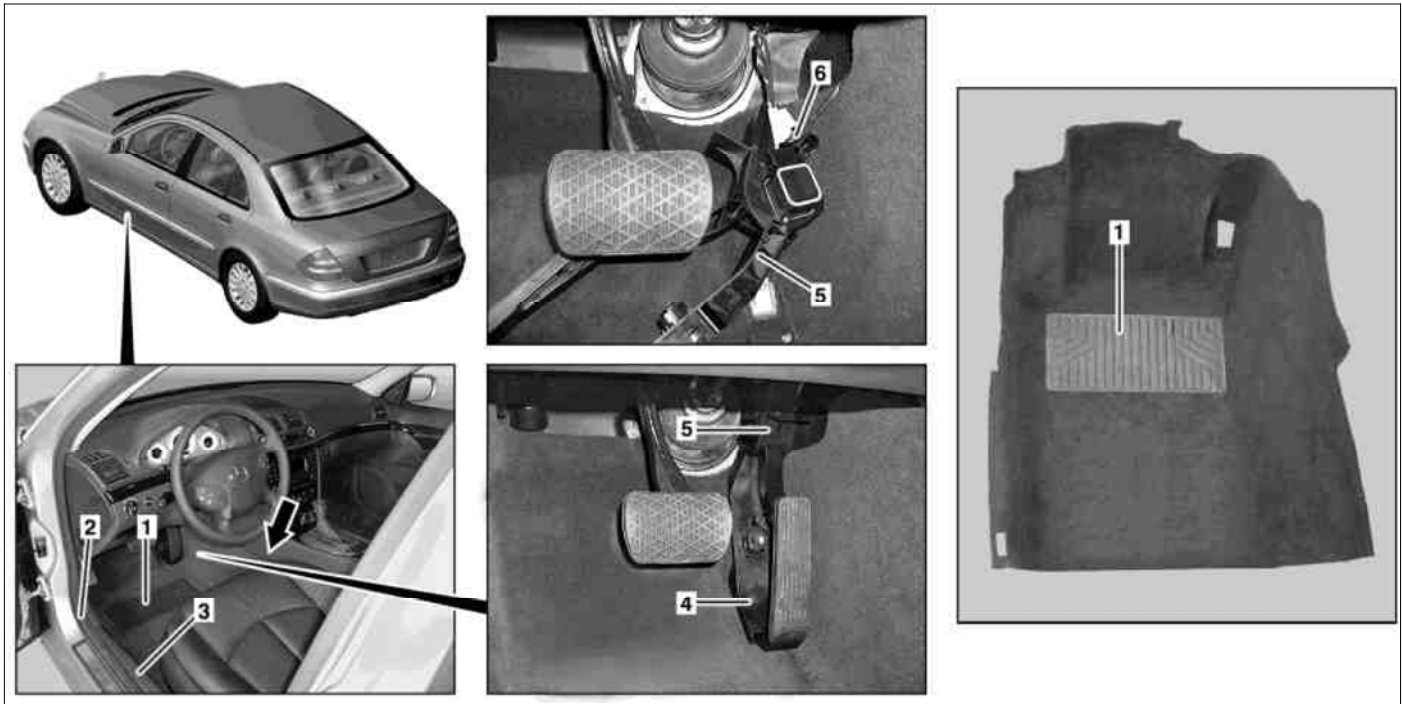


MODEL 211.0/ 2/ 6







P68.20-2618-09

Shown on model 211.0

1 Left front floor covering  
2 Edge guard

3 Scuff plate  
4 Plug

5 Accelerator pedal  
6 Electrical connector

 	Remove/Install		
1	Remove cover below left of instrument panel		AR68.10-P-1500T
2	Remove left A-pillar paneling	 Footwell paneling	AR68.30-P-4050TA
3	Remove edge guard (2) in area of scuff plate (3)		
4	Remove scuff plate (3)		
5	Remove plugs (4) from accelerator pedal (5) with mounting wedge and unscrew nut below		*110589035900
6	Remove accelerator pedal (5) and disconnect electrical connector (6) from accelerator pedal (5)		
7	Pull out left front floor covering (1) from below instrument panel (arrow)		
8	Remove left front floor covering (1)		
9	Install in the reverse order		

