


MODEL 211.0/ 2/ 6

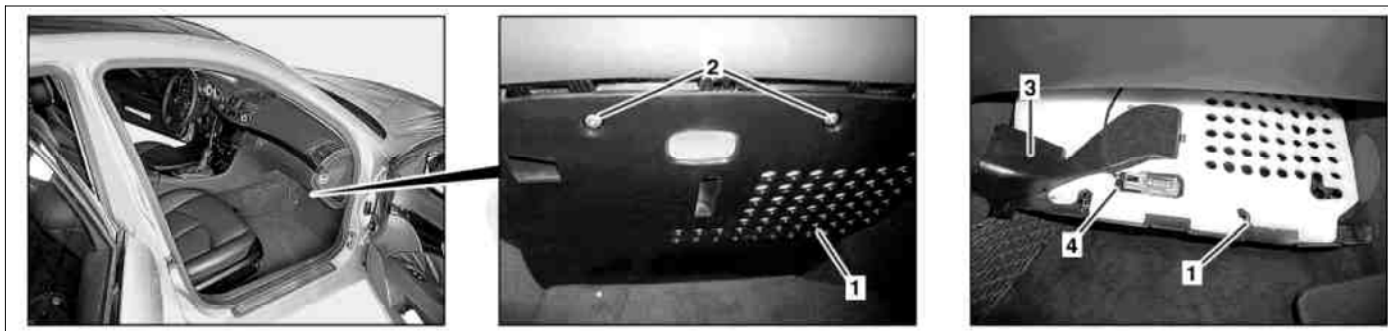

P68.10-2722-07





Shown on model 211.0

1 Cover
2 Bolts

3 Air duct
4 Electrical connector

Modification notes

8.1.04	Disconnect/connect/remove ground lead from battery		
--------	--	--	--

	Remove/Install		
1	Move front passenger's seat all the way to the rear	 See Operating Instructions	
2	Switch off interior lighting	 See Operating Instructions	
3	Unscrew bolts (2)		
4	Fold cover (1) downward	 Installation: Ensure correct connection of the air duct (3).	
5	Disconnect electrical connector (4)		
6	Remove cover (1) to the rear out of the footwell		
7	Install in the reverse order		