



MODEL 211.0/ 2/ 6

- 1 Front section, fender liner
- 2 Tie strap
- 3 Line bracket
- 4 Expanding clip
- 5 Bolts
- 6 Nuts
- 7 Bolt

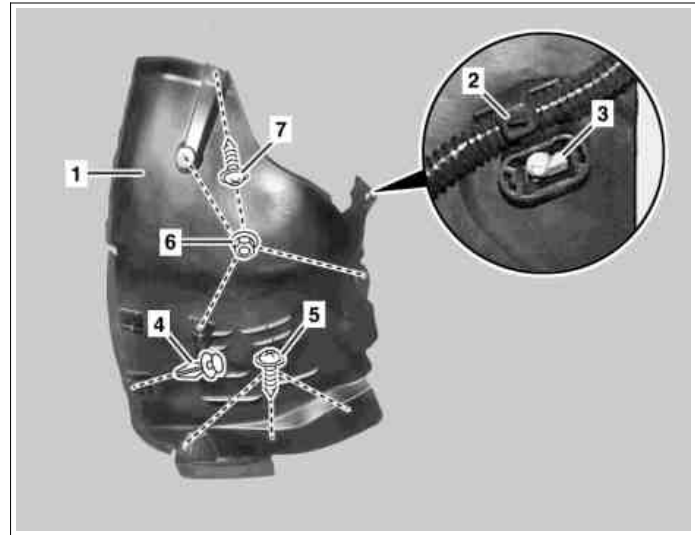

P88.10-2060-11

☒ ☒	Remove/Install		
⚠ <b>Danger!</b>	<b>Risk of death</b> caused by vehicle slipping or toppling off of the lifting platform.	Align vehicle between the columns of the hydraulic hoist and position the four support plates below the hoist support points specified by the vehicle manufacturer.	AS00.00-Z-0010-01A
1	Raise vehicle with lifting platform		
2	Turn left or right wheel of front axle to full lock		
3	Remove tie strap (2) and line bracket (3)	ⓘ <b>Installation:</b> Replace tie straps (2).	
4	Remove expanding clip (4)		
5	Unscrew bolts (5)		
6	Unscrew nuts (6)		
7	Remove bolt (7)		
8	Loosen rear fender liner section approx. 20 cm out of fender with mounting wedge	ⓘ Loosen rear fender liner section until front section of fender liner (1) can be removed from fender (1) ☒	*110589035900
9	Remove front fender liner section (1) from fender	ⓘ <b>Installation:</b> Ensure that fender liner is seated correctly.	
10	Install in the reverse order		



110 589 03 59 00

Mounting wedge