



MODEL 212
up to model year 2014

Shown with engine 642

- 1 Radiator grille
- 2 Cold air intake bridge
- 3 Engine cover air ducting (with engine 642)
- 4 Air intake duct
- 5 Engine hood cable
- 6 Bracket
- 7 Bracket



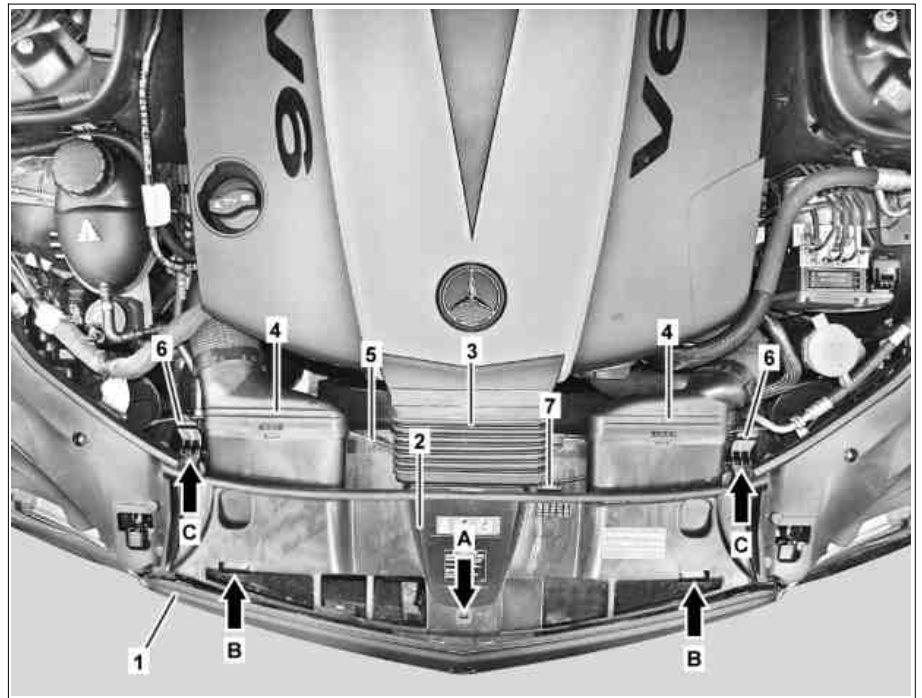

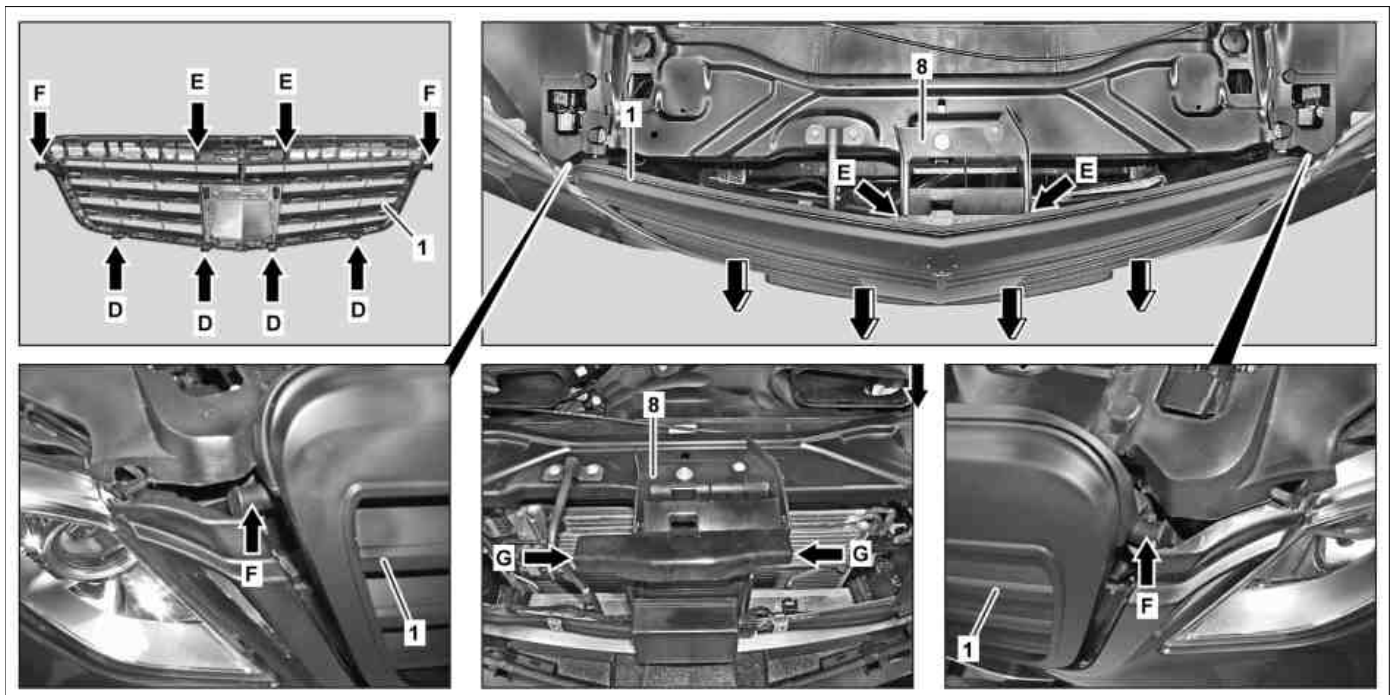P88.40-2847-06



P88.40-2848-09

1 Radiator grille

8 Radiator crossmember bracket

 	Remove/install		
1	Remove engine cover air ducting (3)	with engine 642	
2	Remove left and right air intake duct (4)		

3	Unhook engine hood cable (5) from brackets (6, 7)		
4	Release cold air intake bridge (2) at catch hooks (arrows A, B and C) and remove air intake bridge (2).		
5	Unclip radiator grille (1) from catch hooks (arrows D) and slightly pivot toward front out of bumper		
6	Lift bracket (arrows E) on radiator grille (1) out of pins (arrows G) on radiator crossmember bracket (8)	i Installation: Ensure that pins (arrows G) are seated correctly in brackets (arrows E) on radiator grille (1).	
7	Unclip left and right pins (arrows F) on radiator grille (1) from bumper and remove radiator grille (1) in direction of arrow.		
8	Install in the reverse order		