
MODEL 212.0 /1 /2 (except 212.074 /077 /274 /277) with CODE (279) Electronic gear selector

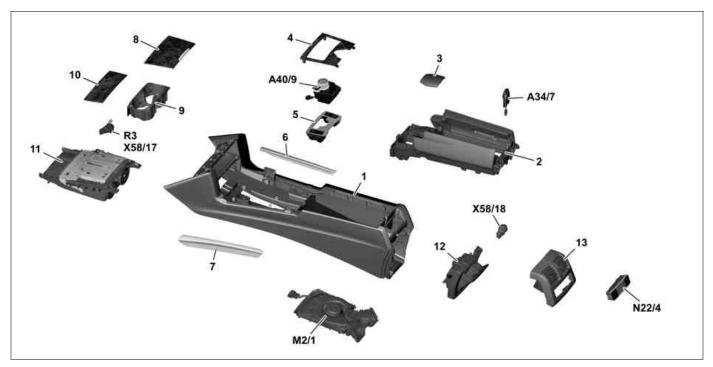

P68.20-4106-09

,	Cerner console
2	Rear stowage compartment

3 Release handle cover

4 Cover

5 Cover for drive stage selector switch

6 Right trim strip

7 Left trim strip

8 Front cover

9 Cup holder

10 Rear cover

11 Stowage compartment or ashtray housing

12 Rear ashtray

13 Rear air nozzle

A34/7 Bluetooth module (with code (386) Comfort telephony)

A40/9 Audio/COMAND control panel M2/1 Rear blower motor (with code (581) Comfort automatic air

conditioning)

N22/4 Rear automatic climate control operating unit (with code (581)

Comfort automatic air conditioning)

R3 Cigarette lighter with front ashtray illumination (with code (301) ashtray

package/smoker package)

X58/17 Front vehicle interior socket (without code (301) Ashtray

package/smoker package)
X58/18 Rear center console power

outlet

2	Rear stowage compartment
3	Release handle cover

4 Cover

5 Cover for drive stage selector

switch


9 Cup holder


11 Stowage compartment or ashtray housing

13 Rear air nozzle


14 Cover

A40/9 Audio/COMAND control panel
N22/7 Automatic air conditioning control
and operating unit





P68.20-4107-04

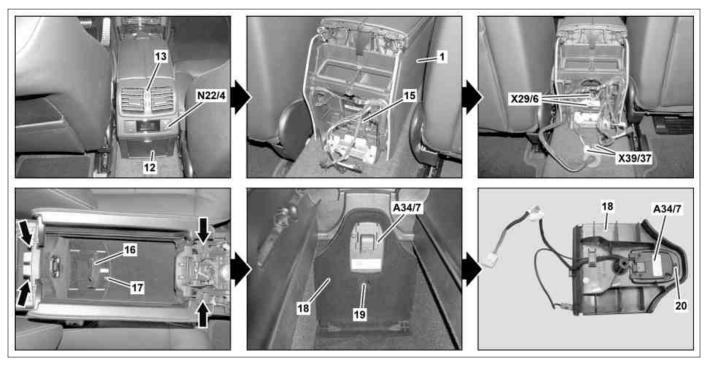

P68.20-4108-09

1	Center console	19	Screw	N22/4	Rear automatic climate control
12	Rear ashtray	20	Screw		operating unit
13	Rear air nozzle				(with code (581) Comfort
15	Cover	A34/7	Bluetooth module (with code		automatic air conditioning)
16	Bracket		(386) Comfort telephony)	X29/6	Center console electrical
17	Screw				connector
18	Cover			X39/37	Electrical connector for mobile
, 0	56761				phone (with code (386) Comfort
					telephony)

Modification notes

23.3.12	Remove center console cover added	Operation step 3	
---------	-----------------------------------	------------------	--

XX	Remove/install		
1	Open cover (14) on stowage compartment or ashtray housing (11)		
2	Remove cupholder (9) and rubber mat below		
3	Remove cover (4)		AR68.20-P-2350EW
4	Remove stowage compartment or ashtray housing (11)	To remove audio/COMAND control panel (A40/9) it is not necessary to remove the stowage compartment or ashtray housing (11). The cigarette lighter with front ashtray illumination (R3) or front vehicle interior socket (X58/17) is installed in the stowage compartment or ashtray housing (11).	AR68.20-P-2420EW
j.	Remove Audio/COMAND control panel (A40/9)		AR82.60-P-7503EW
	Remove rear air vent (13) and lay down to side with electrical lines connected	i On vehicles with code (581) Comfort automatic air condition, the rear automatic air conditioning operating unit (N22/4) is installed in the rear air vent (13).	AR83.10-P-4800CW
7	Remove rear ashtray (12) or stowage compartment	i To remove center console (1) and on vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7) or rear stowage compartment (2). The rear center console socket (X58/18) is installed in the rear ashtray (12).	AR68.20-P-2230EW
3	Fold cover (15) up toward rear	To remove center console (1) and on vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7) or rear stowage compartment (2).	

Slide back foam rubber jacketing and disconnect mobile phone electrical connector (X39/37)	On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7), rear stowage compartment (2) or center console (1).	
Disconnect center console electrical connector (X29/6)	To remove center console (1).	
Unscrew bolts (arrows) and remove rear stowage compartment (2) upward	To remove rear stowage compartment (2).	
Unscrew bolt (17) and remove bracket (16)	On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7).	
Unscrew bolt (19) and remove cover (18) with Bluetooth module (A34/7)	On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7). i Guide out wiring harness	
Unscrew bolt (20) and remove Bluetooth module (A34/7) from cover (18)	On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7).	
Remove center console (1)		AR68.20-P-2000EW
Remove rear blower motor (M2/1)	On vehicles with code (581) Comfort AR83.30-P- automatic air conditioning	
Install in the reverse order		
	disconnect mobile phone electrical connector (X39/37) Disconnect center console electrical connector (X29/6) Unscrew bolts (arrows) and remove rear stowage compartment (2) upward Unscrew bolt (17) and remove bracket (16) Unscrew bolt (19) and remove cover (18) with Bluetooth module (A34/7) Unscrew bolt (20) and remove Bluetooth module (A34/7) from cover (18) Remove center console (1) Remove rear blower motor (M2/1)	disconnect mobile phone electrical connector (X39/37) bisconnect center console electrical connector (X29/6) Unscrew bolts (arrows) and remove rear stowage compartment (2) upward Unscrew bolt (17) and remove bracket (16) Unscrew bolt (19) and remove cover (18) with Bluetooth module (A34/7). Unscrew bolt (20) and remove Bluetooth module (A34/7). Unscrew bolt (20) and remove Bluetooth module (A34/7). In Guide out wiring harness Unscrew bolt (20) and remove Bluetooth module (A34/7). Remove center console (1) Remove rear blower motor (M2/1) On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7). On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7). On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7). On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7). On vehicles with code (386) Comfort telephony to remove Bluetooth module (A34/7). On vehicles with code (581) Comfort automatic air conditioning