


MODEL 212.2

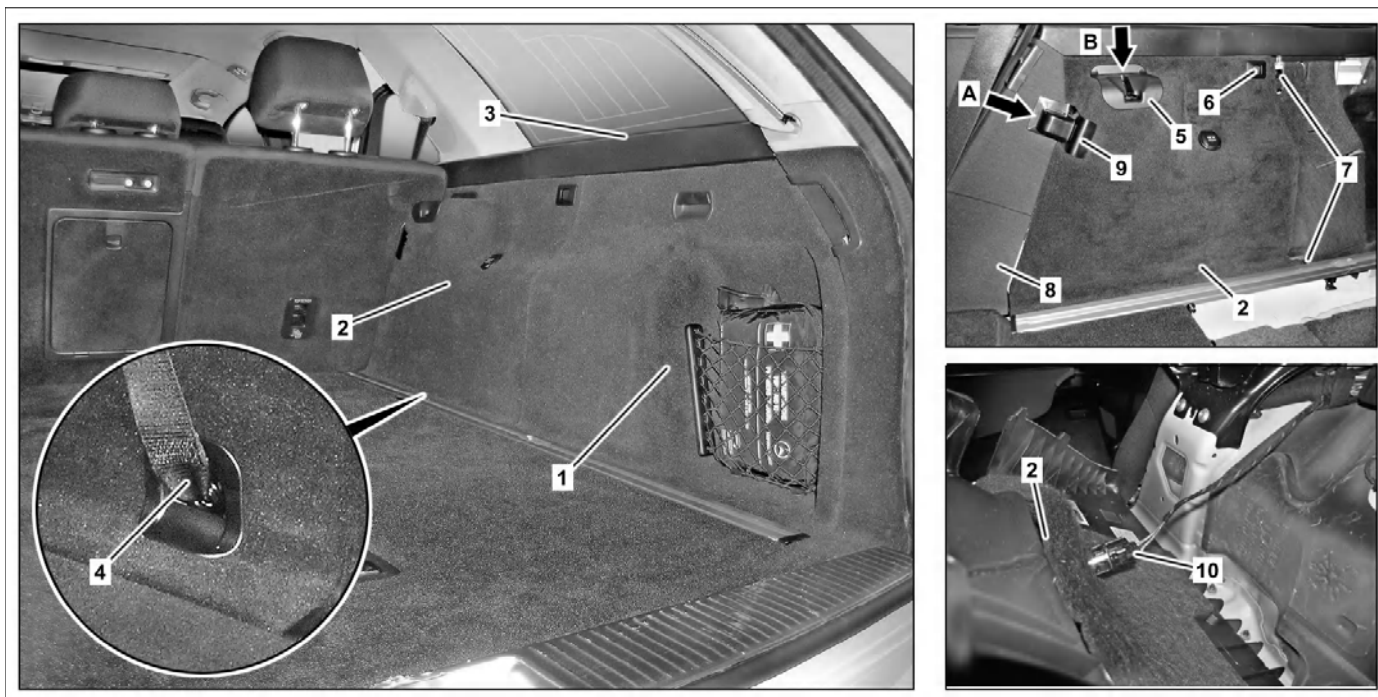


P68.30-3511-09

Shown on right side of vehicle

- |   |                      |                         |
|---|----------------------|-------------------------|
| 1 Side load compartment paneling  | 5 Cover              | 9 Cover                 |
| 2 Wheel well paneling   | 6 Cover frame        | 10 Electrical connector |
| 3 Upper side load compartment paneling  | 7 Clips              |                         |
| 4 Belt end fitting (with code (844)<br>Folding bench seat in cargo area,<br>opposite direction of travel) | 8 Rear side paneling |                         |

Shown on right side of vehicle

- |  |
|--|
| 3 Upper side load compartment paneling |
| 11 Cover grill                         |
| 12 Clips                               |
| 13 Clip                                |
| 14 C-pillar paneling                   |

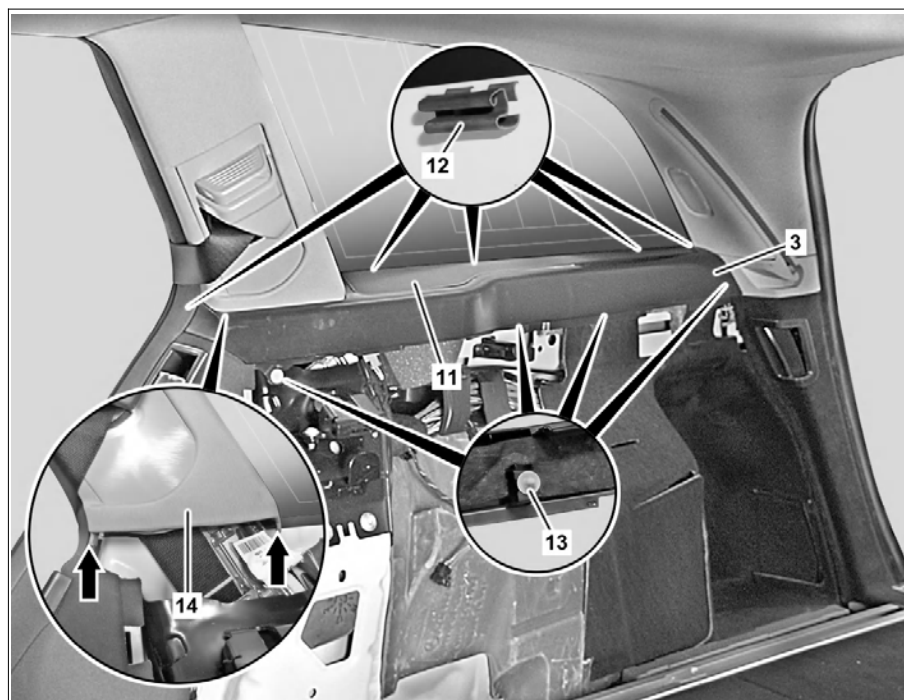


P68.30-3510-06

<b>⚠ Danger !</b>	<b>Risk of injury</b> caused by fingers being jammed or pinched when removing, installing or aligning hoods, doors, trunk lid/rear-end door or sliding roof.	No parts of the body or limbs should be within the operating area when the components are moving.	AS00.00-Z-0011-01A
<b>i</b>	Notes on sensor system for trunk lid opening/closing		AH80.61-P-0001-01A
<b>↔ ↔</b>	<b>Remove/install</b>		
1	Remove side load compartment paneling (1)		
2	Fold rear seat backrest to front		
3	Remove twin roller blinds		
4	Unclip cover (9) from top (arrow A)	<b>🔧</b> Clip remover	*452589016300
5	Unscrew bolt and unclip cover (5) from top (arrow B)	<b>🔧</b> Clip remover	*452589016300
6	Unclip cover frame (6)	<b>🔧</b> Clip remover	*452589016300
7	Remove clips (7) and loosen wheel well paneling (2)	<b>🔧</b> Clip remover	*452589016300
8	Disconnect electrical connector (10)		
9	Remove belt end fitting (4)	MODEL 212.2 with CODE 844 (Rear-facing folding bench seat in load compartment) <b>Nm</b> Bolt, rear belt end fitting	*BA91.40-P-1014-01Q
10	Remove wheel well paneling (2)	<b>i</b> <b>Installation:</b> Ensure that rear side paneling (8) is seated correctly.	
11	Remove cover grille (11)	<b>i</b> With code (844) Folding bench seat in load compartment opposite direction of travel, remove seat belt from cover grill (11). <b>🔧</b> Clip remover	*452589016300
12	Unclip upper side load compartment paneling (3) from clips (13)	<b>🔧</b> Clip remover	*452589016300
13	Unclip upper side load compartment paneling (3) from clips (12) and remove	<b>i</b> With code (844) Folding bench seat in load compartment, opposite direction of travel, remove seat belt from upper side load compartment paneling (3). <b>i</b> <b>Installation:</b> Pay attention to positioning in relation to C-pillar paneling (14) (arrows) and correct seating on front clips (12). <b>🔧</b> Clip remover	*452589016300
14	Install in the reverse order		

**Nm** Seat belts/emergency tensioning retractors

Number	Designation		MODEL 212.2
BA91.40-P-1014-01Q	Bolt, rear belt end fitting	Nm	35



452 589 01 63 00

Clip remover