


**MODEL 212**

without CODE B03 (ECO start/stop function)

without CODE ME04 (Mild hybrid drive)

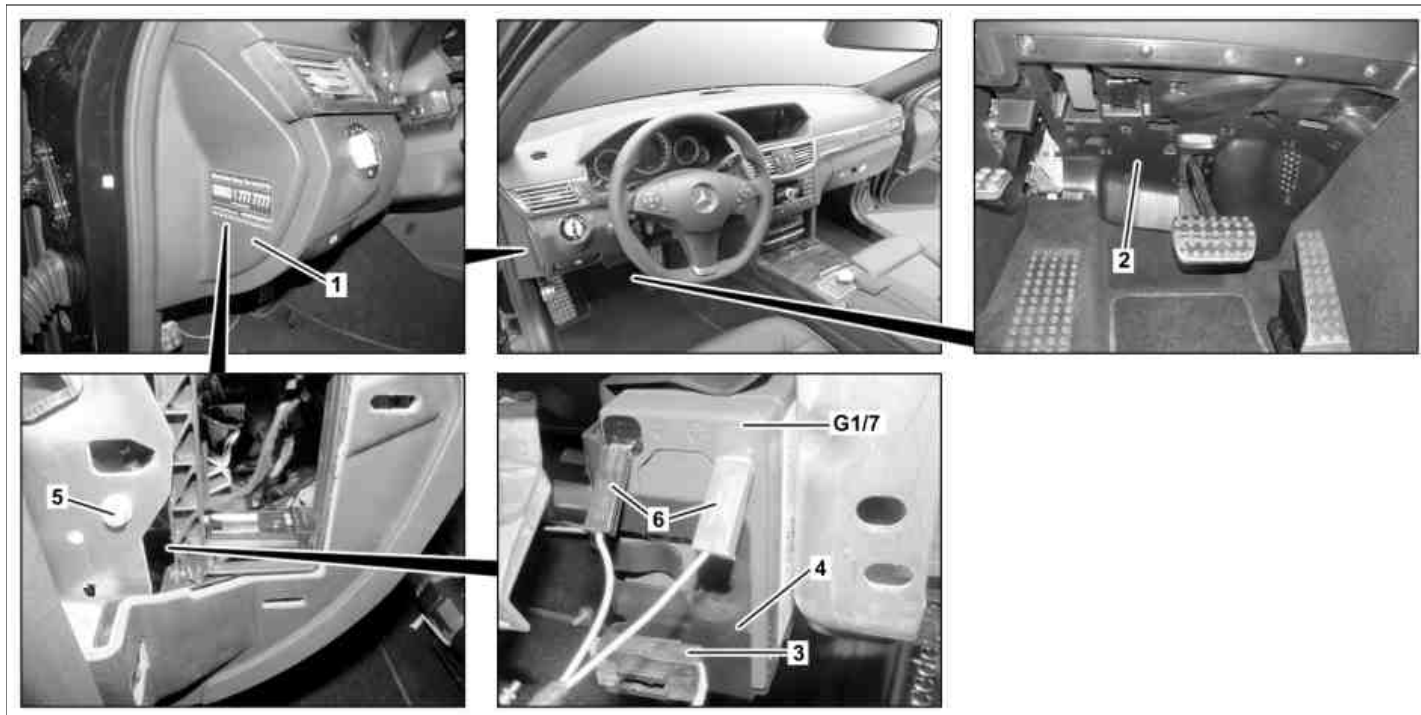


P54.10-3170-09

- 1 Cover  
2 Cover  
3 Bracket

- 4 Bracket  
5 Screw  
6 Electrical connections

G1/7 Additional battery

	Remove/install		
	Notes on battery		AH54.10-P-0001-01A
	Notes on AGM battery		AH54.10-P-0002-01A
1	Switch off ignition and remove transmitter key or KEYLESS-GO stop/start button from the EZS control unit	KEYLESS-GO start/stop button only on vehicles with code (889) Keyless-Go.	
2	Remove cover (1)	Long wedge	*115589035900
3	Remove cover (2) below instrument panel on left		
4	Remove bracket (3) from bracket (4) and place to one side with electrical lines connected		
5	Disconnect electrical connectors (6) from additional battery (G1/7)		
6	Remove screw/bolt (5)		
7	Remove bracket (4) with additional battery (G1/7) downwards		
8	Install in the reverse order		



115 589 03 59 00

Long wedge