


- MODEL 204.0## /2## #A as of 213187
- MODEL 204.0## /2## #F as of 231783
- MODEL 204.0## /2## #R as of 048423
- MODEL 204.9
- MODEL 207.### ## as of 032555
- MODEL 212
- MODEL 216 as of 1.6.09
- MODEL 216 with CODE (800) Model year 2010
- MODEL 221 as of 1.6.09
- MODEL 221 with CODE (800) Model year 2010

Shown on model 204.9

- 1 Upper trim panel
- 2 Lower trim panel
- 3 Screw

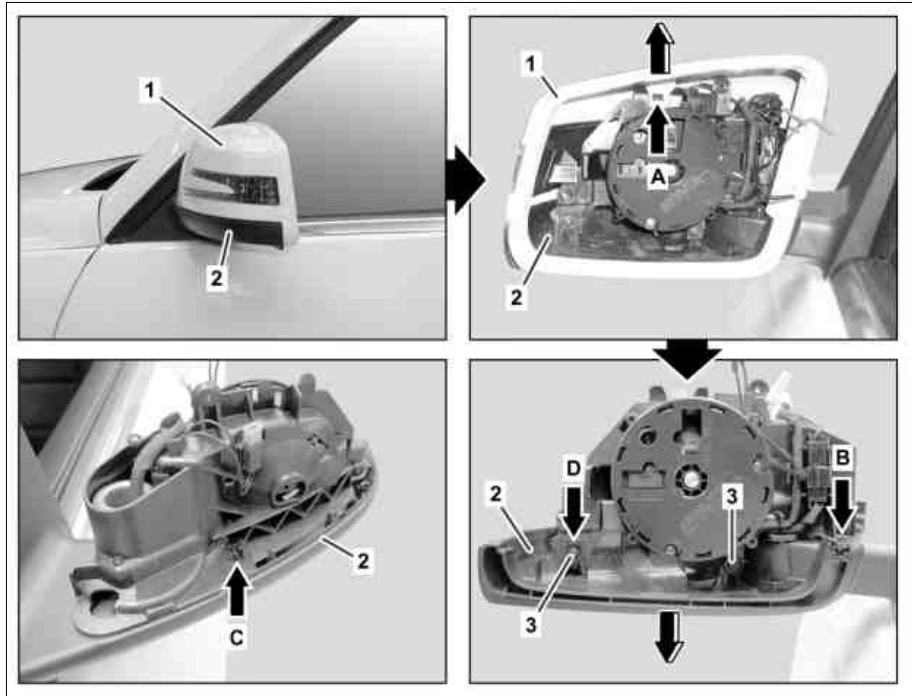

P88.70-2548-06

☒ ☒	Remove/install		
1	Remove mirror glass on left outside mirror and right outside mirror	Model 204, 207, 212 Model 216, 221	AR88.70-P-9020CW AR88.70-P-9020TX
2	Lift catch hook (arrow) and remove upper paneling (1) upward in direction of arrow		
3	Remove bolts (3)		
4	Unlock catch hook (arrow B)		
5	Unlock catch hook (arrow C) and remove lower paneling (2) downward	i On model 212, 216, 221 the left outside mirror ambient lamp or right outside mirror ambient lamp is integrated into the bottom paneling (2) which must be pulled out of the frame before removing the bottom paneling (2).	
6	Install in the reverse order		