


MODEL 164, 251 as of model year 2011
MODEL 203.7## #E with CODE (809) Model year 2009
MODEL 166.0, 204, 207, 212, 218

Shown on model 204 with code (249)
Automatically dimming inside and
outside mirror including folding outside
mirror

- 1 Mirror glass
- 2 Catch hook
- 3 Electrical connectors
- 4 Electrical connector

M21/1 Left outside mirror
 M21/2 Right outside mirror

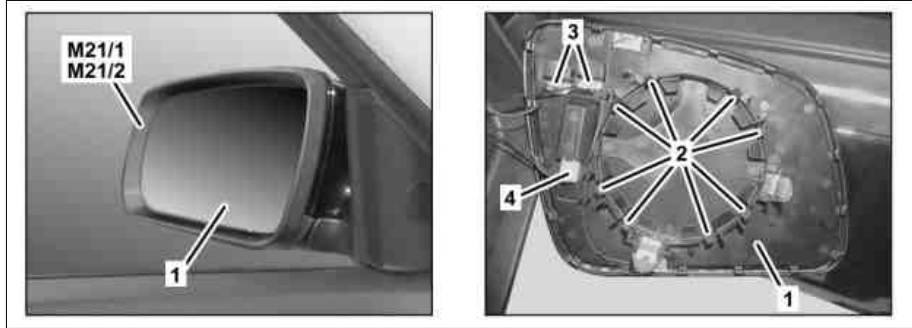

P88.70-2538-04

	Remove/install		
Danger!	Risk of injury Skin, eye and respiratory system irritation may occur through contact or inhalation of substances contained in the mirror lens	Wear protective gloves and safety glasses.	AS60.00-Z-0008-01R
1	Tilt out mirror lens (1) upward		
2	Manually pull mirror glass (1) toward rear and unclip from left outside mirror (M21/1) or right outside mirror (M21/2)	⚠ When unclipping, ensure that mirror glass (1) and the catch hooks (2) are not damaged. Otherwise it is necessary to replace the mirror glass (1). ⓘ Installation: Clip mirror glass (1) from bottom upward into left outside mirror (M21/1) or right outside mirror (M21/2). Ensure that all catch hooks (2) arrest completely.	
3	Disconnect electrical connectors (3, 4) and remove mirror glass (1)	ⓘ The number of electrical connectors (3, 4) depends on the vehicle equipment. ⚠ When installing ensure that electrical wiring harnesses are routed without pinching. Otherwise the electrical wiring harnesses can be damaged.	
4	Install in the reverse order		