


Model 205, 213, 217, 222, 238, 253, 293

### Modification notes

30.01.2019	Work procedure completely modified.		
------------	-------------------------------------	--	--

### Shown on model 222

- 1 Mirror glass
- 2 Catch hook
- 3 Electrical connections
- 4 Electrical connection

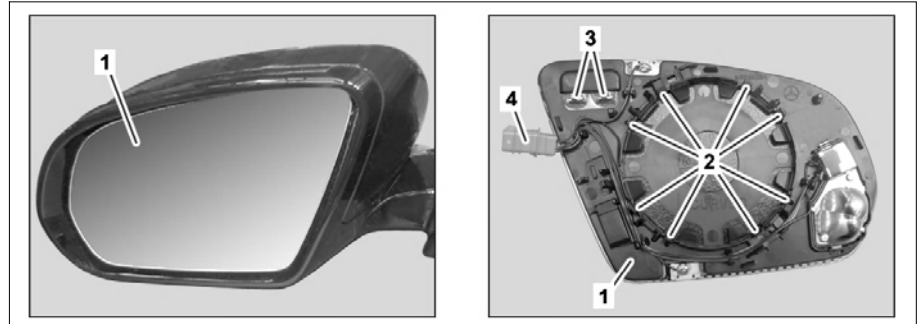

P88.70-A000-04

Warning	<b>Risk of injury</b> caused by irritation of the skin, eyes and respiratory system through contact or inhalation of substances contained in the mirror lens.	Wear protective gloves and safety glasses.	AS60.00-Z-0008-01R
	<b>Remove/install</b>		
1	Tilt out mirror glass (1) at top.		
2	Remove mirror glass (1) by hand from housing and in doing so unclip at mirror glass adjustment drive.	During unclipping, ensure that mirror glass (1) is not tensioned too much. Mirror glass (1) will otherwise break and must be replaced. <b>Installation:</b> Clip mirror glass (1) into mirror glass adjustment drive from the bottom up. Ensure that all catch hooks (2) arrest completely.	
3	Disconnect electric lines from electrical connections (3, 4) and remove mirror glass (1).	The number of electrical connections (3, 4) depends on the vehicle equipment. <b>Installation:</b> Ensure that electrical wiring harnesses are routed correctly.	
4	Install in the reverse order		