





- Model 205**
 except code 248 (Rear seat with integrated child seat)
 except code P10 (Taxi package Germany)
- Model 213**
 except code 248 (Rear seat with integrated child seat)
- Model 238**
- Model 253**
- Model 293**

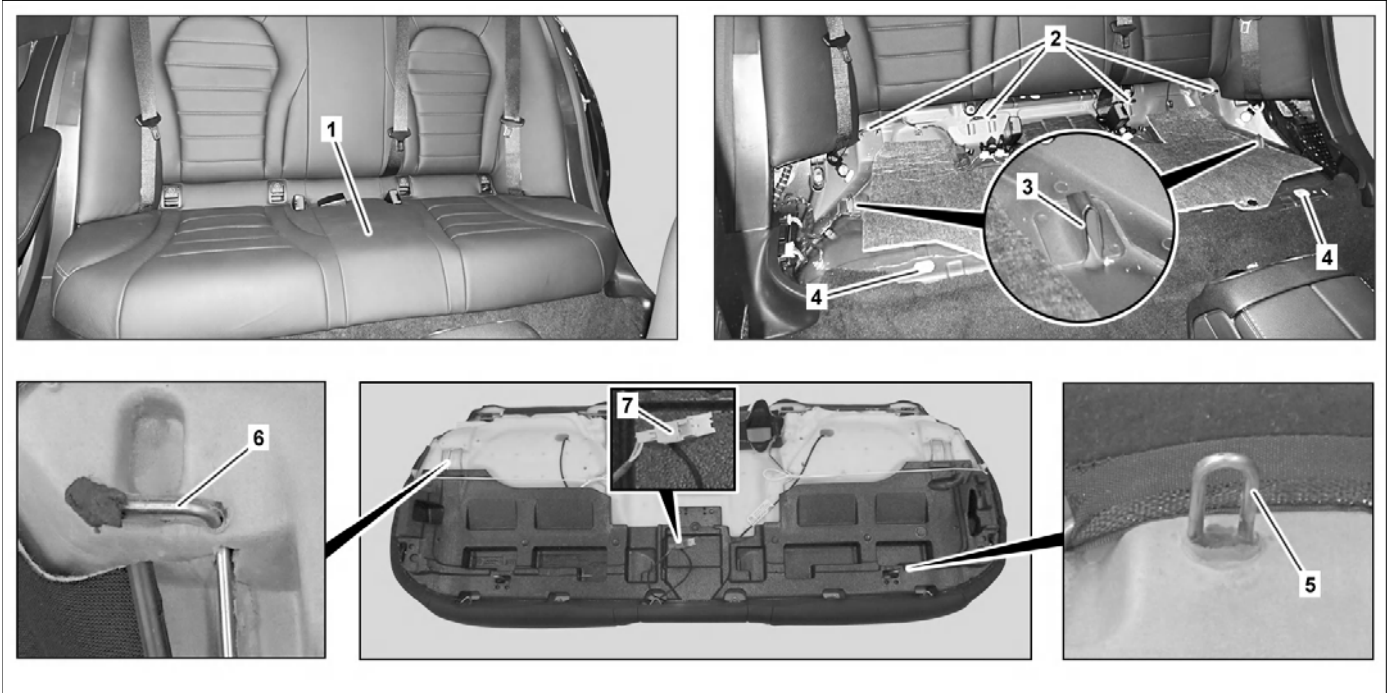

P91.12-3932-09

Shown on MODEL 205.2

- | | | | | | |
|---|---------------|---|---------------|---|----------------------|
| 1 | Seat cushion | 4 | Pilot bushing | 6 | Wire hoop |
| 2 | ISOFIX mounts | 5 | Wire hoop | 7 | Electrical connector |
| 3 | Safety hook | | | | |

 	Remove/install		
1	Move driver's and front passenger seat forward.		
2	Remove rubber insert in cup holder.	Model 205.3/4 except code 248 (Rear seat with integrated child seat) except code P10 (Taxi package Germany) Model 238	
3	Remove nut in cup holder.	Model 205.3/4 except code 248 (Rear seat with integrated child seat) except code P10 (Taxi package Germany) Model 238	
4	Pull seat cushion (1) at left and right upward out of pilot bushings (4).	 Installation: Ensure that wire hoop (5) is seated correctly in pilot bushings (4).	

5	Disconnect and unclip electrical connector (7).	<p>Model 205.1 with code 872 (Heated rear seats) except code 248 (Rear seat with integrated child seat) except code P10 (Taxi package Germany)</p> <p>Model 213 with code 872 (Heated rear seats) except code 248 (Rear seat with integrated child seat)</p> <p>Model 238 with code 872 (Heated rear seats)</p> <p>Model 253 with code 872 (Heated rear seats)</p> <p>Model 293 with code 872 (Heated rear seats)</p>	
6	Press seat cushion (1) on left and right towards rear and unhook upwards from safety hooks (3).	<p>i Installation: Ensure that wire hoop (6) is seated correctly in safety hooks (3).</p>	
7	Detach seat cushion (1) from ISOFIX mounts (2) and remove from vehicle.	<p>!</p> <p>Carefully remove the seat cushion (1) from vehicle. Otherwise components of the vehicle may be damaged.</p> <p>i Installation: Ensure that belt buckles are correctly positioned.</p>	
8	Install in the reverse order		