


Model 213.2

Shown on right side of vehicle

- 1 Seat side bolster
- 2 Screw
- 3 Belt end fitting
- 4 Mount

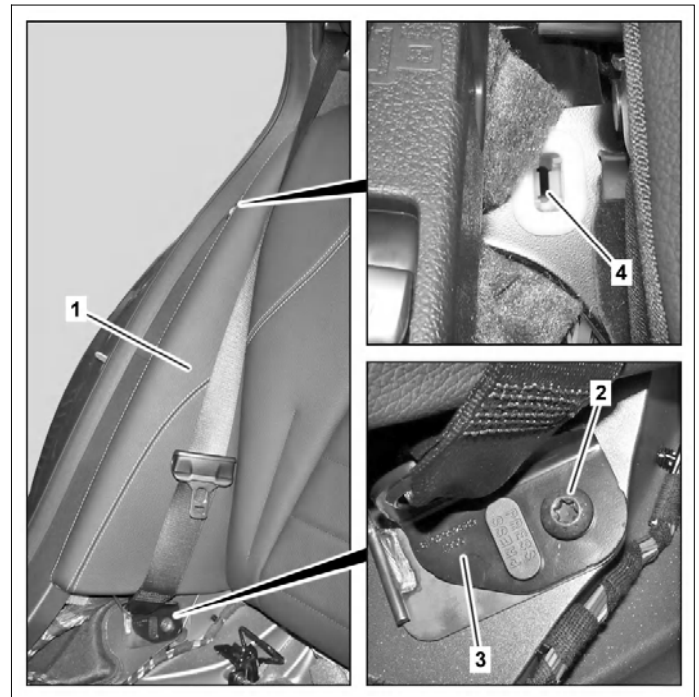

P91.12-4019-12

	Remove/install		
1	Remove seat cushion in rear	Model 213.2 except code 248 (Rear seat with integrated child seat) Model 213.2 with code 248 (Rear seat with integrated child seat)	AR91.12-P-1020LW AR91.12-P-1020LWA
2	Remove screw/bolt (2) and hang belt end fitting to one side (3)	Bolt, rear belt end fitting	*BA91.40-P-1005-01U
3	Unclip and remove seat side bolster (1)	Installation: Ensure correct seating of seat side bolster (1) in mount (4).	
4	Install in the reverse order		

Seat belts/emergency tensioning retractors

Number	Designation		Model 213
BA91.40-P-1005-01U	Bolt, rear belt end fitting	Nm	35