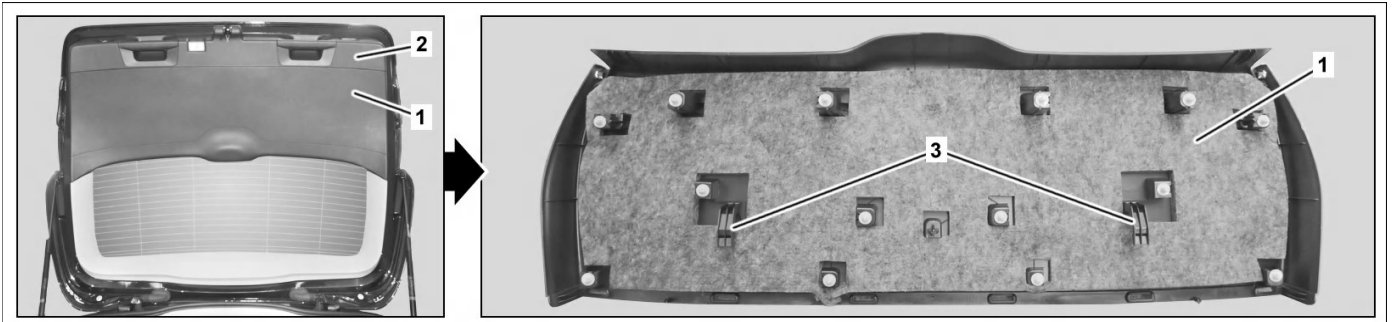


Model 205.2  
 Model 213.2  
 Model 253  
 Model 293






P72.20-3359-07

## Shown on MODEL 205.2

1 Center liftgate paneling  
 2 Bottom liftgate paneling

3 Guides

 <b>Warning</b>	<b>Risk of injury</b> caused by fingers being jammed or pinched when removing, installing or aligning hoods, doors, trunk lid/rear-end door or sliding roof.	No parts of the body or limbs should be within the operating area when the components are moving.	AS00.00-Z-0011-01A
	Notes on HANDS-FREE ACCESS		AH80.61-P-0001-01A
	<b>Remove/install</b>		
1	Remove bottom liftgate trim (2).	Model 205.2, 213.2, 253 Model 293	AR72.20-P-6617LWS AR72.20-P-6617EQ
2	Unclip center liftgate trim (1), swivel in the direction of the rear window, and remove.	 <b>Installation:</b> First insert center liftgate paneling (1) into liftgate with guides (3).	
3	Install in the reverse order.		