


Model 213  
except code 555 (AMG-Performance Seat)

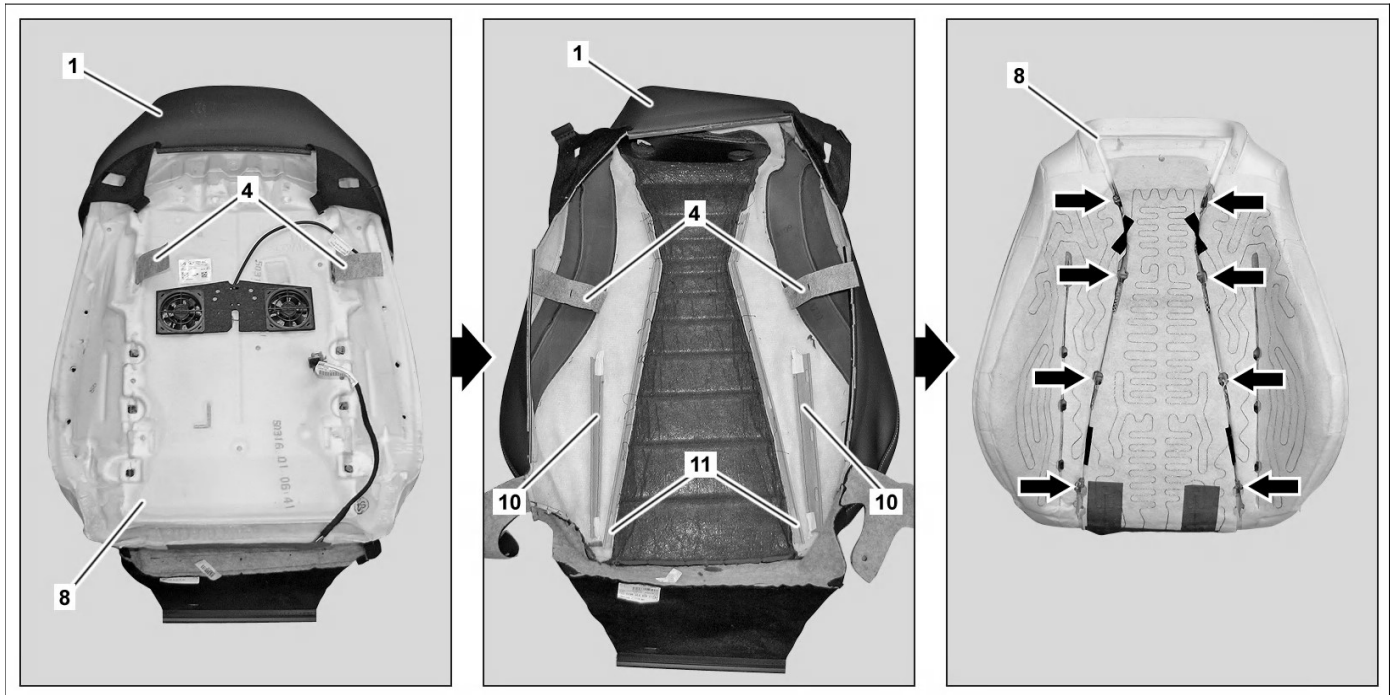

P91.18-2376-09


Shown with code 401 (Seat climate control for driver and front passenger)

1 Cover  
4 Lugs

8 Backrest padding  
10 Staple wire

11 Staple wires

	Remove		
1	Remove seat backrest padding (8) with cover (1).		AR91.10-P-0003LWE
2	Slip cover (1) over seat backrest padding (8).		
3	Unclip staple wires (11) from catch hooks (arrows) on seat backrest padding (8).	<p><b>i</b> The staple wires (10) are unclipped when the seat backrest padding (8) is removed.</p> <p><b>S</b> Dismantling tool</p>	*205589036300
4	Feed shackles (4) through seat backrest padding (8).		
5	Remove cover (1) from seat backrest padding (8).		
	<b>Install</b>		
6	Attach cutout for universal holder on cover (1).	When replacing the cover (1). Model 213 with code 866 (Pre-installation for Rear Seat Entertainment System) except code 555 (AMG-Performance Seat)	AR91.10-P-8656-02LWE
7	Position cover (1) in center of seat backrest padding (8) and align seams of cover (1) into cutouts of seat backrest padding (8).		
8	Clip staple wires (11) into catch hooks (arrows) on seat backrest padding (8).	<b>S</b> Dismantling tool	*205589036300
9	Feed shackles (4) through seat backrest padding (8).		
10	Check alignment of cover (1) based on markings on upper end of cover (1) and seat backrest padding (8).		
11	Slip cover (1) over seat backrest padding (8).		
12	Install seat backrest padding (8) with cover (1).		AR91.10-P-0003LWE

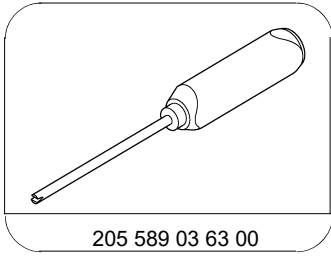

205 589 03 63 00

Dismantling tool