


Model 213
with code 432 (Dynamic seats left and right)

- 1 Air cushion
- 2 Cover
- 3 Air cushion
- 4 Cover
- 5 Air cushion
- 6 Spring frame
- 7 Bolt
- 8 Bolt

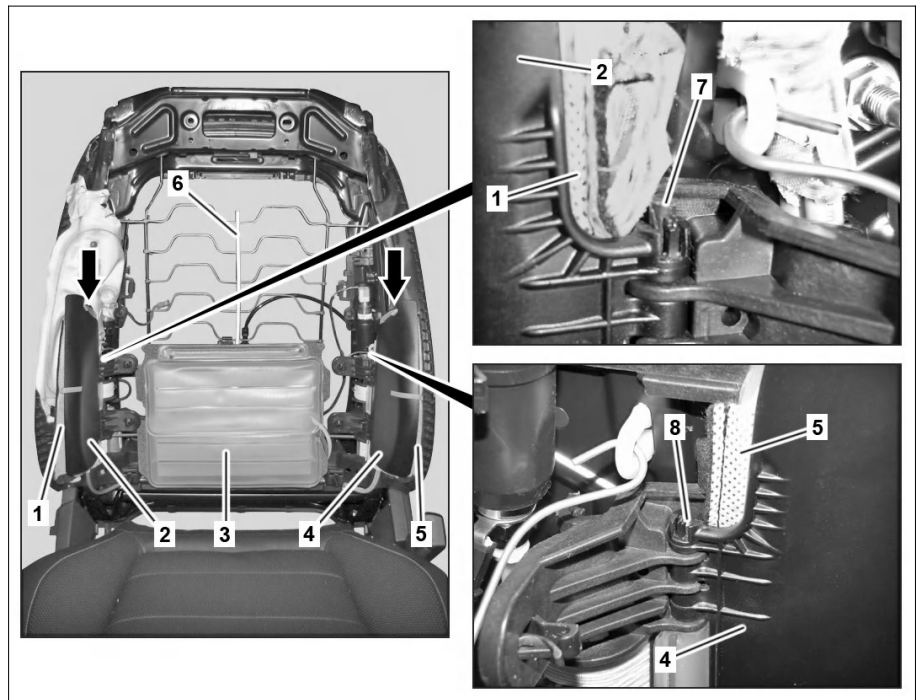

P91.25-2655-06

☒ ☒	Remove/install		
1	Remove seat backrest padding.	Model 213 with code 432 (Dynamic seats left and right) except code 555 (AMG Performance seats)	AR91.10-P-0003LWE
2	Remove front multicontour seat control unit.		AR91.25-P-1900LWE
3	Unhook mounting brackets (arrows) from air cushions (1, 5) on covers (2, 4).		
4	Release bolts (7, 8) and remove until the air cushions (1, 5) can be removed.		
5	Expose pneumatic line from air cushions (1, 5).		
6	Remove air cushions (1, 5).		
7	Expose pneumatic line from air cushion (3).		
8	Remove air cushion (3) from spring frame (6).		
9	Install in the reverse order		